

# Horizon-independent Preconditioner Design for Linear Predictive Control

Ian McInerney, Eric C. Kerrigan, George A. Constantinides

**Abstract**—First-order optimization solvers, such as the Fast Gradient Method, are increasingly being used to solve Model Predictive Control problems in resource-constrained environments. Unfortunately, the convergence rate of these solvers is significantly affected by the conditioning of the problem data, with ill-conditioned problems requiring a large number of iterations. To reduce the number of iterations required, we present a simple method for computing a horizon-independent preconditioning matrix for the Hessian of the condensed problem. The preconditioner is based on the block Toeplitz structure of the Hessian. Horizon-independence allows one to use only the predicted system and cost matrices to compute the preconditioner, instead of the full Hessian. The proposed preconditioner has equivalent performance to an optimal preconditioner, producing up to a 6x speedup for the Fast Gradient Method in our numerical examples. Additionally, we derive horizon-independent spectral bounds for the Hessian in terms of the transfer function of the predicted system, and show how these can be used to compute a novel horizon-independent bound on the condition number for the preconditioned Hessian.

**Index Terms**—model predictive control (MPC), optimal control, preconditioning, fast gradient method (FGM), constrained LQR

## I. INTRODUCTION

Model Predictive Control (MPC) is an optimal control method that aims to optimize the closed-loop performance of a controlled system by solving an optimization problem at each sampling instant to implicitly compute the next control input. MPC is swiftly becoming a popular choice for the control of complicated systems with operational constraints, due to its explicit handling of constraints and recent advances in real-time optimization algorithms, allowing it to be deployed on resource-constrained systems such as internet-of-things devices [1].

A common formulation of MPC is the Constrained Linear Quadratic Regulator (CLQR), which is an extension of the well known LQR optimal controller to handle state and input constraints for a linear system with a quadratic objective function. The CLQR formulation leads to an optimization problem that is a convex Quadratic Program (QP), which can be solved efficiently using many different optimization algorithms, such as interior-point methods, active-set methods, or other gradient-based methods. The efficient implementation

of QP solvers on resource constrained embedded systems has been an active area of research, with results showing that a CLQR controller can be implemented on embedded processors and Field Programmable Gate Arrays (FPGAs) for systems with sampling times on the order of milliseconds or less [2], [3].

When implementing a CLQR controller, there are three types of iterative methods that are commonly used: interior-point methods, active-set methods and first-order methods. Each of these types of methods are affected by the conditioning of the problem, with poorly conditioned problems requiring more iterations to find the optimal solution. To overcome the ill-conditioning of the problem and improve the convergence rate of the algorithm, implementations utilize preconditioning techniques on the problem data. In the MPC literature, many different preconditioning schemes have been developed for interior-point methods [4], active-set methods [5], and gradient-based methods [6]–[8].

In this work we focus on first-order methods, which are commonly preconditioned using matrices generated by solving semidefinite programs (SDPs). In [8], an SDP formulation that minimizes the resulting maximal eigenvalue of the preconditioned matrix by embedding the Hessian matrix into a linear matrix inequality constraint was proposed. This formulation is solvable using existing interior-point methods for SDPs, but the embedding of the Hessian matrix into the constraints means the preconditioner must be recomputed if the horizon length changes and that the SDP problem size grows with the horizon length.

In this work we present a new preconditioner for the condensed CLQR formulation, with a focus on applying it to first-order gradient methods, such as the Fast Gradient Method (FGM). This preconditioner is horizon-independent and is computed using only matrices with the number of states and inputs as their dimensions. Our proposed preconditioner provides performance equivalent to the existing SDP preconditioners, while providing a reduction in the computational effort required to compute the preconditioner. Additionally, we exploit the block Toeplitz structure of the CLQR problem's condensed Hessian to derive tight horizon-independent bounds on the extremal eigenvalues and condition number of both the original and preconditioned Hessian.

We begin in Section III by deriving the theoretical framework to compute the bounds on the extremal eigenvalues and condition number of the Hessian. We extend this analysis to the case of preconditioned matrices in Section IV-A, and then propose a new preconditioner for the CLQR problem in Section IV-B. Finally, we present numerical examples in Sec-

The support of the EPSRC Centre for Doctoral Training in High Performance Embedded and Distributed Systems (HiPEDS, Grant Reference EP/L016796/1) is gratefully acknowledged.

The authors are with the Department of Electrical & Electronic Engineering, Imperial College London, SW7 2AZ, U.K. E.C. Kerrigan is also with the Department of Aeronautics. email: i.mcinerney17@imperial.ac.uk, e.kerrigan@imperial.ac.uk, g.constantinides@imperial.ac.uk

tion V comparing the proposed preconditioner against existing preconditioners, and showing its effect on the convergence rate of the Fast Gradient Method applied to three different systems.

#### A. Notation

$A'$  and  $A^*$  denote the transpose and conjugate-transpose of the matrix  $A$ , respectively.  $A \otimes B$  represents the Kronecker product of matrix  $A$  with matrix  $B$ . For an infinite-dimensional block Toeplitz matrix  $\mathbf{T}$ ,  $T_n$  represents the truncated version of  $\mathbf{T}$  after  $n$  diagonals (where  $n$  is a positive integer) to form an  $n \times n$  matrix. Let  $\lambda_1 \leq \dots \leq \lambda_k$  be the real eigenvalues of a Hermitian matrix in sorted order, with the set of all eigenvalues denoted by  $\lambda$ . The p-norm is denoted by  $\|\cdot\|_p$ , with  $\|A\|_2$  the matrix spectral norm, and  $\|A\|_F$  the Frobenius norm. The condition number of a matrix is defined as  $\kappa(A) := \|A\|_2 \|A^{-1}\|_2$ . The set  $\mathbb{T} := \{z \in \mathbb{C} : |z| = 1\}$  is the complex unit circle.

$\mathcal{L}^\infty$  is the space of matrix-valued essentially bounded functions (i.e. matrix-valued functions that are measurable and have a finite Frobenius norm almost everywhere on their domain, see [9, §2]).  $\tilde{\mathcal{C}}_{2\pi}$  is the space of continuous  $2\pi$ -periodic functions inside  $\mathcal{L}^\infty$ .

**Definition 1.** Let  $\mathcal{P}_T(\cdot) \in \tilde{\mathcal{C}}_{2\pi}$  be a function that maps  $\mathbb{T} \rightarrow \mathbb{C}^{n \times n}$ , we define the extreme eigenvalues of  $\mathcal{P}_T(\cdot)$  as

$$\lambda_{\min}(\mathcal{P}_T) := \inf_{z \in \mathbb{T}} \lambda_1(\mathcal{P}_T(z)), \quad \lambda_{\max}(\mathcal{P}_T) := \sup_{z \in \mathbb{T}} \lambda_n(\mathcal{P}_T(z)),$$

and the condition number of  $\mathcal{P}_T(\cdot)$  as

$$\kappa(\mathcal{P}_T) := \frac{\lambda_{\max}(\mathcal{P}_T)}{\lambda_{\min}(\mathcal{P}_T)}.$$

**Definition 2.** Let  $T_n$  be the  $n \times n$  truncation of an infinite matrix  $\mathbf{T}$ . We define the extrema of the spectrum of  $\mathbf{T}$  as

$$\lambda_{\min}(\mathbf{T}) := \lim_{n \rightarrow \infty} \lambda_1(T_n), \quad \lambda_{\max}(\mathbf{T}) := \lim_{n \rightarrow \infty} \lambda_n(T_n).$$

## II. PRELIMINARIES

#### A. CLQR Formulation

In this work, we examine the Constrained Linear Quadratic Regulator (CLQR) formulation of the MPC problem, which can be written as the following constrained quadratic programming problem

$$\min_{u,x} \frac{1}{2} x_N' P x_N + \frac{1}{2} \sum_{k=0}^{N-1} \begin{bmatrix} x_k \\ u_k \end{bmatrix}' \begin{bmatrix} Q & 0 \\ 0 & R \end{bmatrix} \begin{bmatrix} x_k \\ u_k \end{bmatrix} \quad (1a)$$

$$\text{s.t. } x_{k+1} = A x_k + B u_k, \quad k = 0, \dots, N-1 \quad (1b)$$

$$x_0 = \hat{x}$$

$$E_u u_k + E_x x_k \leq c, \quad k = 0, \dots, N-1 \quad (1c)$$

where  $N$  is the horizon length,  $x_k \in \mathbb{R}^n$  are the states, and  $u_k \in \mathbb{R}^m$  are the inputs at sample instant  $k$ .  $A \in \mathbb{R}^{n \times n}$  and  $B \in \mathbb{R}^{n \times m}$  are the state-space matrices describing the discrete-time system  $\mathcal{G}_s$ , and  $\hat{x} \in \mathbb{R}^n$  is the current measured system state.  $E_u \in \mathbb{R}^{l \times m}$  and  $E_x \in \mathbb{R}^{l \times n}$  are the stage constraint coefficient matrices, and the vector  $c \in \mathbb{R}^l$  is the vector of bounds for the stage constraints. The matrices  $Q = Q' \in \mathbb{R}^{n \times n}$ ,  $R = R' \in \mathbb{R}^{m \times m}$  and  $P = P' \in \mathbb{R}^{n \times n}$  are

the weighting matrices for the system states, inputs and final states, respectively. The weighting matrices are chosen such that  $P$ ,  $Q$  and  $R$  are positive definite.

This problem can be condensed by removing the state variables from (1) to leave only the control inputs in the vector  $u := [u'_0 \ u'_1 \ \dots \ u'_{N-1}]'$ . The optimization problem is then the inequality-constrained problem

$$\min_u \frac{1}{2} u' H u + \hat{x}' \Phi' u \quad (2a)$$

$$\text{s.t. } G u \leq F \hat{x} + g \quad (2b)$$

$$\text{with } H := \Gamma' \bar{Q} \Gamma + \bar{R}, \quad \bar{R} := I_N \otimes R, \quad \bar{Q} := \begin{bmatrix} I_{N-1} \otimes Q & 0 \\ 0 & P \end{bmatrix},$$

$$\Gamma := \begin{bmatrix} B & 0 & 0 & 0 \\ AB & B & 0 & 0 \\ A^2 B & AB & B & 0 \\ \vdots & & & \ddots \\ A^{N-1} B & A^{N-2} B & A^{N-3} B & \dots & B \end{bmatrix}. \quad (3)$$

The choice of terminal weighting matrix  $P$  in problem (1) can be crucial to the stability and performance of the closed-loop controller. The simplest choice is to set  $P = Q$ , so that there is no difference in the final state weighting versus the other states. This choice allows for simple formation of the problem matrices, but may not guarantee stability for the closed-loop problem.

Instead, a possible choice for  $P$  is to choose it to be the solution to the Discrete Algebraic Riccati Equation (DARE)

$$P = A' P A + Q - A' P B (B' P B + R)^{-1} B' P A, \quad (4)$$

where  $Q$  and  $R$  are the cost matrices from Problem (1), and  $A$  and  $B$  are the system matrices. Choosing  $P$  in this way approximates the cost function value for the time after the horizon ends, and allows for the derivation of closed-loop stability guarantees for the controller [10].

#### B. Numerically Robust CLQR Formulation

When implementing a CLQR controller for unstable systems, the condensed formulation (2) becomes numerically unstable as the horizon length increases. This is due to the fact that unstable systems will have  $|\lambda_{\max}(A)| > 1$ , and taking repeated powers of  $A$  to form  $\Gamma$  will then cause the matrix entries to grow unbounded. This then leads to the condition number of  $H$  growing unbounded with the horizon length.

To overcome this, a modification to (2) was proposed in [11] where instead of using the actual system  $A$  for computing the prediction matrix and optimal control, a pre-stabilized system  $A - BK$  is used instead. This pre-stabilized system would guarantee that the prediction matrix entries do not grow unbounded with the horizon length, leading to better conditioning of the optimization problem.

To formulate the pre-stabilized problem, a new system  $\mathcal{G}_c$  is formed by setting  $u_k = -K x_k + v_k$  where  $v \in \mathbb{R}^m$  is a new input so that

$$\mathcal{G}_c := \{x_{k+1} = (A - BK)x_k + B v_k, \quad (5)$$

where the controller  $K$  is chosen so that  $|\lambda_{\max}(A-BK)| < 1$ . There are several ways to compute a  $K$  that meets this criteria, however we focus on  $K$  chosen as the unconstrained infinite-horizon LQR controller computed using  $Q$  and  $R$  from (1a).

The computations are then done using the input space  $v := [v'_0 \ v'_1 \ \cdots \ v'_{N-1}]'$ , turning the condensed optimization problem (2) into

$$v^* := \underset{v}{\operatorname{argmin}} \frac{1}{2} v' H_c v + \hat{x}' \Phi'_c v \quad (6a)$$

$$\text{s.t. } G_c v \leq F_c \hat{x} + g \quad (6b)$$

with  $A_c = A - BK$ ,  $Q_c = Q + K'RK$ ,  $H_c := \Gamma'_c \bar{Q}_c \Gamma_c + \bar{R}$ ,

$$\bar{Q}_c := \begin{bmatrix} I_{N-1} \otimes Q_c & 0 \\ 0 & P \end{bmatrix}, \quad \Gamma_c := \begin{bmatrix} B & 0 & 0 & \cdots & 0 \\ A_c B & B & 0 & & 0 \\ A_c^2 B & A_c B & B & & 0 \\ \vdots & & & \ddots & \vdots \\ A_c^{N-1} B & A_c^{N-2} B & A_c^{N-3} B & \cdots & B \end{bmatrix}. \quad (7)$$

The input applied to the original system is then  $u_0 = -K\hat{x} + v_0^*(\hat{x})$ . The constraint matrices  $F_c$  and  $G_c$  in Problem (6) are formed by modifying  $F$  and  $G$  from Problem (2) to use the pre-stabilized system, with full details given in [11].

### III. SPECTRAL PROPERTIES

In order to effectively analyze and derive our closed-form preconditioner, we must first derive some spectral properties of the matrices used in the CLQR problem, specifically the Hessian and prediction matrix. Similar results to these were reported in [12] and [13, Sect. 11], but our analysis applies to any positive definite  $Q$  matrix, does not require a special rearrangement of the Hessian to handle non-Schur-stable systems, and is built upon the principles of Toeplitz theory instead of Fourier theory.

#### A. Matrix Symbol for the Prediction Matrix

We start by analyzing the prediction matrix  $\Gamma_c$  and note that its diagonals are constant blocks, which means that  $\Gamma_c$  is a truncated block Toeplitz matrix. A finite-dimensional block Toeplitz matrix with blocks of size  $m \times n$  is said to be generated by a matrix-valued function mapping  $\mathbb{T} \rightarrow \mathbb{C}^{m \times n}$ , which is called its matrix symbol and represents an infinite-dimensional block Toeplitz matrix. The matrix  $\Gamma_c$  can then be viewed as a truncation to  $N$  block diagonals of the infinite-dimensional Toeplitz matrix  $\Gamma$  which is represented by the matrix symbol  $\mathcal{P}_{\Gamma_c}(\cdot)$ .

The diagonal blocks of the matrix give the spectral coefficients of the matrix symbol, so the symbol can be represented as a Fourier series with the coefficients given by the matrix blocks. For the original prediction matrix  $\Gamma$ , the truncated Fourier series that only uses the blocks over the horizon length is given by

$$\sum_{i=0}^{N-1} A^i B z^{-i}, \quad \forall z \in \mathbb{T}. \quad (8)$$

As the horizon length increases, this series is only guaranteed to converge to a finite matrix symbol when the system  $\mathcal{G}$  with matrices  $A$  and  $B$  is Schur-stable.

To form a convergent Fourier series no matter the system, we introduce a stabilizing linear state-feedback controller  $u_k = -Kx_k + v_k$  to the prediction, as described in Section II-B. This leads to a convergent Fourier series for the prediction matrix  $\Gamma_c$  of the new controlled system, and the finite matrix symbol given in Lemma 1.

**Lemma 1.** *Let  $K \in \mathbb{R}^{m \times n}$  be a linear state-feedback control matrix used to form the pre-stabilized system (5). The prediction matrix  $\Gamma_c$  then has the matrix symbol  $\mathcal{P}_{\Gamma_c} \in \tilde{\mathcal{C}}_{2\pi}$  with*

$$\mathcal{P}_{\Gamma_c}(z) := z(zI - (A - BK))^{-1}B = z\mathcal{G}_c(z), \quad \forall z \in \mathbb{T},$$

where  $\mathcal{G}_c(\cdot)$  is the transfer function matrix for the system  $\mathcal{G}_c$ .

*Proof.* The matrix symbol for the block Toeplitz matrix  $\Gamma_c$  is derived using the infinite-dimensional extension of  $\Gamma_c$ , called  $\Gamma$ . This extension is formed by noting the pattern in the blocks of (7), and then extrapolating to get (where 0 is the main diagonal and positive blocks are below the diagonal)

$$\tilde{\Gamma}_i := \begin{cases} 0 & \text{if } i < 0, \\ (A - BK)^i B & \text{if } i \geq 1. \end{cases} \quad (9)$$

For a block Toeplitz matrix, the matrix symbol is the trigonometric polynomial of its Fourier series. The blocks defined by (9) are the spectral coefficients of the infinite-dimensional matrix  $\Gamma$ , so the Fourier series for  $\Gamma$  is then

$$\sum_{i=0}^{\infty} z^{-i} (A - BK)^i B.$$

The constant  $B$  matrix can then be extracted from the summation, leaving

$$\sum_{i=0}^{\infty} (A - BK)^i z^{-i}.$$

Since  $K$  was designed to make  $(A - BK)$  Schur-stable, this summation becomes a convergent Neumann series that converges to  $z(zI - (A - BK))^{-1}$  [14, §3.4]. With the  $B$  matrix right-multiplying the summation, the result is the transfer function matrix for the time-shifted system  $z\mathcal{G}_c(z)$ . Finally, note that the spectral coefficients of  $\tilde{\Gamma}$  are absolutely summable, so  $\mathcal{P}_{\Gamma_c}$  is in the Wiener class, meaning that  $\mathcal{P}_{\Gamma_c} \in \mathcal{L}^\infty$  and is continuous and  $2\pi$ -periodic, leading to  $\mathcal{P}_{\Gamma_c} \in \tilde{\mathcal{C}}_{2\pi}$ .  $\square$

Note that at this point there is no restriction on the type of linear state-feedback controller used to pre-stabilize the system - any controller that results in a Schur-stable closed-loop system can be used. A convenient choice for  $K$  though is the infinite-horizon LQR controller designed using the cost matrices in (1). That LQR feedback law can be readily computed if  $P$  is chosen to be the solution to the DARE, which is a convenient choice, since it can provide closed-loop stability guarantees for the predictive controller [10].

If the system  $\mathcal{G}$  is Schur-stable to begin with, then there is no need for a pre-stabilizing controller  $K$  and the matrices  $\Gamma$

and  $\Gamma_c$  are the same. The matrix symbol for  $\Gamma_c$  can also be simplified as shown in Corollary 1.

**Corollary 1.** *If the system  $\mathcal{G}$  is Schur-stable, then with  $K = 0$  the prediction matrix  $\Gamma$  has a convergent Fourier series, producing the matrix symbol  $\mathcal{P}_\Gamma \in \tilde{\mathcal{C}}_{2\pi}$  with*

$$\mathcal{P}_\Gamma(z) := z(zI - A)^{-1}B = z\mathcal{G}(z), \quad \forall z \in \mathbb{T},$$

where  $\mathcal{G}(\cdot)$  is the transfer function matrix for the system  $\mathcal{G}$ .

### B. Matrix Symbol for the Hessian

The Hessian of the MPC problem formulation in (6) can be split into three distinct parts

$$H_c := H_Q + H_R + H_P \quad (10)$$

where  $H_Q$ ,  $H_R$  and  $H_P$  are the parts that contain the matrices  $Q$ ,  $R$  and  $P$ , respectively. Slightly different analysis must be done depending on the choice of  $P$ , and in this work we focus on the cases when  $P = Q$  and  $P$  is the solution to the DARE for the infinite-dimensional unconstrained LQR of problem.

1) *P is the same as Q:* Choosing  $P = Q$  for (1) allows the term  $H_P$  to be consolidated into  $H_Q$ , giving

$$H_c = \Gamma_c^* \bar{Q}_c \Gamma_c + \bar{R}, \quad (11)$$

$$\bar{Q}_c = I_N \otimes (Q + K'RK). \quad (12)$$

Analysis of the resulting matrix  $H_c$ , reveals that  $H_c$  is also block Toeplitz with the matrix symbol given in Lemma 2.

**Lemma 2.** *Let  $P = Q$  and  $\mathcal{P}_{\Gamma_c}$  be the matrix symbol for  $\Gamma_c$  from Lemma 1. The matrix  $H_c$  is then a block Toeplitz matrix with the matrix symbol  $\mathcal{P}_{H_c} \in \tilde{\mathcal{C}}_{2\pi}$ , where*

$$\mathcal{P}_{H_c}(z) := \mathcal{P}_{\Gamma_c}^*(z)(Q + K'RK)\mathcal{P}_{\Gamma_c}(z) + R, \quad \forall z \in \mathbb{T}.$$

*Proof.* Since  $\bar{R}$  is block diagonal with the same entry on every block,  $\bar{R}$  is a block Toeplitz matrix with symbol  $\mathcal{P}_{\bar{R}}(z) := R$ . Using the assumption that  $P = Q$ , we can see that the new state weighting matrix given in (12) is block diagonal with the same entry in each block, making  $\bar{Q}_c$  a block Toeplitz matrix with the symbol  $\mathcal{P}_{\bar{Q}_c}(z) := Q + K'RK$ . Since  $\Gamma_c$  is a lower-triangular block matrix and  $\Gamma_c^*$  is an upper-triangular block matrix, the product  $\Gamma_c^* \bar{Q}_c \Gamma_c$  is block Toeplitz with matrix symbol  $\mathcal{P}_{\Gamma_c}^* \mathcal{P}_{\bar{Q}_c} \mathcal{P}_{\Gamma_c}$  [15, Lemma 4.5]. Additionally, block Toeplitz structure is preserved over the addition of two block Toeplitz matrices, meaning matrix  $H_c$  is then block Toeplitz, with the symbol given in the statement.  $\square$

It is important to note that the product of block Toeplitz matrices is not guaranteed to be block Toeplitz except in certain special cases, while the addition of multiple block Toeplitz matrices with compatible block sizes is always guaranteed to produce a block Toeplitz result. In this case, the lower-triangular structure of  $\Gamma_c$  and the block Toeplitz structure of  $\bar{Q}_c$  implies that the product  $\Gamma_c^* \bar{Q}_c \Gamma_c$  is one of the special cases where the multiplication of the three block Toeplitz matrices of compatible block sizes is block Toeplitz. Choosing an arbitrary  $P$  with  $P \neq Q$  will cause  $\bar{Q}_c$  to no longer be block Toeplitz, so the multiplication will not necessarily produce a block Toeplitz matrix and the Hessian will not be block Toeplitz, in general.

2) *P is the solution to the DARE:* Choosing  $P$  as the solution to the DARE (4) causes  $\bar{Q}_c$  to not be block Toeplitz, since  $\bar{Q}_c$  will then have a different matrix in the lower-right corner than the rest of the main diagonal. This means that the analysis based on the multiplication of structured block Toeplitz matrices used in the proof of Lemma 2 no longer can be applied. However, the resulting  $H_c$  matrix is still block Toeplitz due to the fact that  $P$  will represent the cost of the controller applied after the horizon ends.

**Proposition 1.** *If  $P$  is the solution to the DARE (4) and  $K$  is the infinite-horizon LQR controller for  $\mathcal{G}$ , then  $H_c$  is block Toeplitz and has the same matrix symbol as the case when  $P = Q$  given in Lemma 2.*

*Proof.* Using the matrix splitting (10), the Hessian can be decomposed into three terms, with  $H_Q$  and  $H_P$  given by (13) and (14), respectively, and  $H_R = \bar{R}$ . We start by examining the first diagonal term of  $H_Q + H_P$ ,

$$\sum_{i=0}^{N-1} B'(A_c^i)' Q_c A_c^i B + B'(A_c^N)' P A_c^N B. \quad (15)$$

Since  $P$  is the solution to the DARE (4),  $P$  is also the solution to the Lyapunov equation

$$(A - BK)'P(A - BK) + Q + K'RK = P$$

when  $K$  is the infinite-time LQR controller. This means that  $P$  can also be expressed as

$$P = \sum_{i=0}^{\infty} ((A - BK)')^i (Q + K'RK) (A - BK)^i,$$

transforming (15) into

$$\sum_{i=0}^{N-1} B'(A_c^i)' Q_c A_c^i B + B'(A_c^N)' \left( \sum_{i=0}^{\infty} (A_c^i)' Q_c A_c^i \right) A_c^N B.$$

The  $(A_c^N)'$  and  $A_c^N$  terms on the right summation can be consolidated into the summation, offsetting its starting point to be  $i = N$  instead of 0. This means the right summation is simply continuing the left summation to infinity, allowing the two to be consolidated into

$$\sum_{i=0}^{\infty} B'(A_c^i)' Q_c A_c^i B. \quad (16)$$

The same analysis can be performed on the other terms on the main diagonal, which only differ by where the left summation ends and the right summation is offset to. Therefore, the main diagonal of the matrix sum  $H_Q + H_P$  is composed of blocks with all the same terms. A similar analysis can be done on all diagonals above and below the main diagonal, showing that they are also composed of blocks with all the same terms down the diagonal.

Since all the diagonals are composed of the same blocks down their length, the matrix sum  $H_Q + H_P$  is block Toeplitz, and the resulting Hessian  $H_c$  is block Toeplitz as well, since  $H_R$  is already known to be block Toeplitz.

To construct the matrix symbol for  $H_c$  when  $P$  is the solution to the DARE, we examine the elements in the matrix

$$H_Q := \begin{bmatrix} \sum_{i=0}^{N-1} B'(A_c^i)' Q_c A_c^i B & \sum_{i=0}^{N-2} B'(A_c^{i+1})' Q_c A_c^i B & \sum_{i=0}^{N-3} B'(A_c^{i+2})' Q_c A_c^i B & \cdots & B'(A_c^{N-1})' Q_c B \\ \sum_{i=0}^{N-2} B'(A_c^i)' Q_c A_c^{i+1} B & \sum_{i=0}^{N-1} B'(A_c^i)' Q_c A_c^i B & \sum_{i=0}^{N-2} B'(A_c^{i+1})' Q_c A_c^i B & \cdots & B'(A_c^{N-2})' Q_c B \\ \sum_{i=0}^{N-3} B'(A_c^i)' Q_c A_c^{i+2} B & \sum_{i=0}^{N-2} B'(A_c^i)' Q_c A_c^{i+1} B & \sum_{i=0}^{N-1} B'(A_c^i)' Q_c A_c^i B & \cdots & B'(A_c^{N-3})' Q_c B \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ B' Q_c A_c^{N-1} B & B' Q_c A_c^{N-2} B & B' Q_c A_c^{N-3} B & \cdots & B' Q_c B \end{bmatrix} \quad (13)$$

$$H_P := \begin{bmatrix} B'(A_c^N)' P A_c^N B & B'(A_c^N)' P A_c^{N-1} B & B'(A_c^N)' P A_c^{N-2} B & \cdots & B'(A_c^N)' P A_c B \\ B'(A_c^{N-1})' P A_c^N B & B'(A_c^{N-1})' P A_c^{N-1} B & B'(A_c^{N-1})' P A_c^{N-2} B & \cdots & B'(A_c^{N-1})' P A_c B \\ B'(A_c^{N-2})' P A_c^N B & B'(A_c^{N-2})' P A_c^{N-1} B & B'(A_c^{N-2})' P A_c^{N-2} B & \cdots & B'(A_c^{N-2})' P A_c B \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ B' A_c' P A_c^N B & B' A_c' P A_c^{N-1} B & B' A_c' P A_c^{N-2} B & \cdots & B' A_c' P A_c B \end{bmatrix} \quad (14)$$

$H_Q + H_P$  and how they relate to the case when  $P = Q$ . Note that when  $P = Q$ , the individual elements of the matrix  $H_Q$  have a summation that terminates at the horizon length. Since the matrix symbol is based on the infinite-dimensional matrix, if the matrix  $H_Q$  is extrapolated to a horizon of infinity, the summations in  $H_Q$  will all terminate at infinity. Therefore, the sum  $H_Q + H_P$  will have the same blocks as the infinite-dimensional  $\tilde{H}_Q$  when  $P = Q$ , so the Hessians for the cases when  $P = Q$  and  $P$  is the solution to the DARE will both have the same matrix symbol.  $\square$

3) *Simplification when  $\mathcal{G}$  is Schur-stable:* When  $\mathcal{G}$  is Schur-stable and the results in Corollary 1 are used to simplify the matrix symbol of the prediction matrix, the results given in Lemma 2 and Proposition 1 can be simplified as well.

**Corollary 2.** *If the system  $\mathcal{G}$  is Schur-stable, then with  $K = 0$  and  $P = Q$  or  $P$  the solution to the discrete Lyapunov equation  $A'PA + Q = P$ , the Hessian  $H$  has the matrix symbol  $\mathcal{P}_H \in \tilde{\mathcal{C}}_{2\pi}$  with*

$$\mathcal{P}_H(z) := \mathcal{P}_\Gamma^*(z) Q \mathcal{P}_\Gamma(z) + R, \quad \forall z \in \mathbb{T}.$$

where  $\mathcal{G}(\cdot)$  is the transfer function matrix for the system  $\mathcal{G}$ .

Note that the matrix symbol in Corollary 2 has the same form as the matrix symbol in Lemma 2, however the choice of the matrix  $P$  differs. In the Schur-stable case, in order for the results of Proposition 1 to hold, the terminal cost must be based on the solution to the discrete Lyapunov equation instead of the DARE.

### C. Spectral Bounds for the Hessian

One useful property of block Toeplitz matrices is that the eigenvalue spectrum for any finite-dimensional truncation of the infinite-dimensional block Toeplitz matrix is contained within the extremal eigenvalues of its matrix symbol. This means that the minimum and maximum eigenvalues of the matrix  $H_c$  can be bounded by analyzing the matrix symbol  $\mathcal{P}_{H_c}$ , since  $H_c$  is a finite-dimensional truncation of the infinite-dimensional matrix  $\mathbf{H}_c$  to  $N$  blocks.

**Theorem 1.** *Let  $H_c$  be the condensed Hessian for a prediction horizon of length  $N$  that is block Toeplitz with matrix symbol  $\mathcal{P}_{H_c}$  given in Lemma 2, then the following hold:*

- (a)  $\lambda_{\min}(\mathcal{P}_{H_c}) \leq \lambda(H_c) \leq \lambda_{\max}(\mathcal{P}_{H_c})$
- (b)  $\lim_{N \rightarrow \infty} \kappa(H_c) = \kappa(\mathcal{P}_{H_c})$

*Proof.*

- (a) The spectrum of a finite-dimensional truncation of a block Toeplitz matrix with a symbol in  $\tilde{\mathcal{C}}_{2\pi}$  is bounded by the extremes of the spectrum of its symbol [15, Theorem 4.4].
- (b) Note that  $H_c$  is a Hermitian matrix, which means that it is also normal [16, §4.1]. Since it is both normal and positive semi-definite, the singular values are the same as the eigenvalues [17, §3.1], resulting in the condition number becoming  $\kappa(H_c) = \frac{\lambda_n(H_c)}{\lambda_1(H_c)}$ . Taking the limit of both sides in conjunction with the spectral bounds from part (a) gives

$$\lim_{N \rightarrow \infty} \kappa(H_c) = \kappa(\mathcal{P}_{H_c}).$$

$\square$

**Remark 1.** *Proposition 1 means that the bounds computed from Theorem 1 using Lemma 2 hold for both the case when  $P = Q$  and the case when  $P$  is the solution to the DARE.*

Essentially, these results say that the spectrum for the condensed Hessian in these cases will always be contained inside the interval defined by the maximum and minimum eigenvalues of the matrix symbol in Lemma 2. Additionally, as  $N \rightarrow \infty$  the extremal eigenvalues of  $H_c$  will converge asymptotically to the maximum and minimum eigenvalues of its symbol.

## IV. PRECONDITIONING

The spectral results presented in Sections III-B and III-C can be readily extended to analyze the case of a preconditioned Hessian, as well as to help design new preconditioners.

### A. Analysis of the Preconditioned Hessian

For simplicity of discussion, we focus on the case when  $H_c$  is symmetrically preconditioned as  $L_N^{-1} H_c (L_N^{-1})'$  with a block-diagonal preconditioner  $L_N$  that has  $N$  copies of the block  $L$  on its diagonal, thus guaranteeing that the preconditioned matrix is block Toeplitz. This case is most appropriate for first-order methods, since it guarantees that the structure of the feasible set is preserved over the preconditioning operation

and that the preconditioned Hessian is symmetric [8]. Results can also be derived for non-block-diagonal preconditioners using [9, Thm 4.3] with  $M^{-1}H_c$  where  $M := L_N L'_N$ , but we do not discuss this extension.

Since the preconditioner matrix  $L_N$  is block-diagonal with only  $L$  on its main diagonal, the matrix symbol for  $L_N$  is simply  $L$ . The spectral bounds in Section III-C can then be extended to the preconditioned matrix  $H_L$  by simply replacing  $\mathcal{P}_{H_c}$  in Theorem 1(b) with  $\mathcal{P}_{H_L}$  given by

$$\mathcal{P}_{H_L} := \bar{L} \mathcal{P}_{H_c} \bar{L}', \quad (17)$$

where  $\bar{L} := L^{-1}$ . This analysis requires  $L_N$  to be block Toeplitz, which may not be the case for preconditioners computed using the entire Hessian matrix, unless such a constraint is added to their computation.

### B. Preconditioner Design

There is a rich literature of preconditioners for Toeplitz and circulant matrices, with a focus on designing the preconditioners independent of the size of the matrix (see [18] and references therein). These existing ideas can be applied to the block Toeplitz structure of the Hessian in the CLQR problem in order to design preconditioners to use when solving the optimization problem.

One of the first circulant preconditioners was proposed by Gilbert Strang in [19]. This preconditioner was originally proposed for preconditioning iterative conjugate gradient methods, and is formed by simply copying the central diagonals of the Toeplitz matrix into the preconditioning matrix and wrapping them around to form a circulant matrix. Strang's preconditioner can be naturally extended to the block Toeplitz case by simply copying the individual blocks into the preconditioning matrix and wrapping them around to form a block circulant matrix.

In the case of the CLQR problem with a block diagonal preconditioning matrix, we can explicitly compute the block on the diagonal of the preconditioning matrix without forming the entire Hessian, as shown in Theorem 2.

**Theorem 2.** *Let  $H_c$  be the Hessian from (6) formed by choosing  $K$  as the infinite-horizon LQR controller for  $\mathcal{G}$ , with  $P$  the solution to the DARE (4). The matrix  $H_c$  can be symmetrically preconditioned as  $L_N^{-1} H_c (L_N^{-1})'$ , with  $L_N = I_N \otimes L$  and the blocks  $L$  given by the lower-triangular Cholesky decomposition of  $M$  with*

$$M := B'PB + R. \quad (18)$$

*Proof.* Based on the work in [19], a Circulant preconditioning matrix  $W$  for the matrix  $V$  will have entries that are obtained by copying the central diagonals of  $V$  and wrapping them around to form a circulant matrix. For example, for the matrix

$$V = \begin{bmatrix} V_0 & V_1 & V_2 & V_3 & V_4 \\ V_{-1} & V_0 & V_1 & V_2 & V_3 \\ V_{-2} & V_{-1} & V_0 & V_1 & V_2 \\ V_{-3} & V_{-2} & V_{-1} & V_0 & V_1 \\ V_{-4} & V_{-3} & V_{-2} & V_{-1} & V_0 \end{bmatrix},$$

the block circulant preconditioning matrix will be

$$W = \begin{bmatrix} V_0 & V_1 & V_2 & V_{-2} & V_{-1} \\ V_{-1} & V_0 & V_1 & V_2 & V_{-2} \\ V_{-2} & V_{-1} & V_0 & V_1 & V_2 \\ V_2 & V_{-2} & V_{-1} & V_0 & V_1 \\ V_1 & V_2 & V_{-2} & V_{-1} & V_0 \end{bmatrix}.$$

Since we wish for the preconditioner to be block diagonal, we only need to focus on computing the diagonal block  $V_0$  for the CQLR problem.

For the block Toeplitz Hessian  $H_c$ , the main diagonal block of the infinite dimensional block Toeplitz matrix is (15), which when including the  $H_R$  component becomes

$$\sum_{i=0}^{\infty} B'(A_k^i)' Q_k A^i B + R.$$

Since  $A_k$  is Schur-stable and  $K$  is the LQR controller, this infinite sum converges to the solution of the DARE, making the diagonal block

$$V_0 = B'PB + R.$$

Strang's preconditioner is designed to act as a left preconditioner (e.g.  $W^{-1}V$ ), so since we want a symmetric preconditioner we apply the lower-triangular Cholesky factorization to  $M$ , resulting in  $L$ .  $\square$

**Remark 2.** *The preconditioning matrix  $L$  in Theorem 2 can also be formed by taking the matrix square-root of  $M$ , which could allow for  $L$  to have the same structure as  $M$  if the square root operation is structure preserving.*

Note that the matrices  $M$  and  $L$  will have dimension  $m \times m$ , and that the full preconditioning matrix  $L_N$  is formed by simply repeating  $L$  down the diagonal  $N$  times, so changing the horizon length means simply adding or removing  $L$  blocks from the diagonal of  $L_N$ . Additionally, all the matrices involved in computing  $M$  have dimensions on the order of  $m$  and  $n$ , and have no relation to the horizon length. This is in contrast to SDP-based preconditioner design techniques such as [8], which require the full Hessian to be placed inside the semidefinite optimization problem.

## V. NUMERICAL EXPERIMENTS

In this section we present numerical examples showing the spectral properties computed using the results of Section III, and also the effect of applying the preconditioner from Section IV-B to the CLQR problem for three systems.

### A. Example Systems

1) *Schur-stable system:* The first example system we use is the Schur-stable discrete-time system with four states and two inputs given in [20] with state equation and cost matrices

$$x_{k+1} = \begin{bmatrix} 0.7 & -0.1 & 0.0 & 0.0 \\ 0.2 & -0.5 & 0.1 & 0.0 \\ 0.0 & 0.1 & 0.1 & 0.0 \\ 0.5 & 0.0 & 0.5 & 0.5 \end{bmatrix} x_k + \begin{bmatrix} 0.0 & 0.1 \\ 0.1 & 1.0 \\ 0.1 & 0.0 \\ 0.0 & 0.0 \end{bmatrix} u_k,$$

$$Q = \text{diag}(10, 20, 30, 40), \quad R = \text{diag}(10, 20).$$

We constrain the inputs of the system to be  $|u_k| \leq 0.5$ .

2) *Inverted pendulum*: The next example system we use is a linearized inverted pendulum described by the continuous-time dynamics

$$\dot{x} = \begin{bmatrix} 0 & 1 & 0 & 0 \\ \frac{3g}{2l} & -b & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 \end{bmatrix} x + \begin{bmatrix} 0 \\ \frac{3}{2l} \\ 0 \\ 1 \end{bmatrix} u,$$

with  $g = 9.8067$ ,  $b = 1$ , and  $l = 0.21$ . The system was discretized using a zero order hold with a sampling time of 0.02s, resulting in an unstable discrete-time system. The CLQR problem used the cost matrices  $Q = \text{diag}(1000, 1, 100, 1)$ ,  $R = 10$ , and the input was constrained to be  $|u| \leq 10$ .

3) *Distillation column*: The final example system we use is a binary distillation column with 11 states and 3 inputs from the IFAC control benchmarks [21, Problem 90-01]. The system was discretized using a zero order hold with a sampling time of 0.01s, resulting in a Schur-stable discrete-time system. The CLQR problem used the cost matrices

$$Q = \text{diag}(10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110),$$

$$R = \text{diag}(10, 20, 30),$$

and the inputs were constrained to be

$$|u_1| \leq 2.5, \quad |u_2| \leq 2.5, \quad |u_3| \leq 0.30.$$

### B. Matrix Conditioning

The first numerical results we present show the theoretical results from Theorem 1 when applied to the example systems. It can be seen in Figures 2b and 1b that the limits presented in Theorem 1(b) and Corollary 2, respectively, are attained as the horizon length increases. Note though that the rate at which the condition number of the finite-dimensional Hessian approaches the bound is system-dependent, with the Schur-stable example system converging within 0.01% of the bound by  $N = 40$ , while the inverted pendulum system requires  $N = 225$  to converge to within 0.01%.

As described in Section IV-A, the condition number bound of Theorem 1(b) can be used to analyze the preconditioned Hessian, which is shown in Figures 1b and 2b. The bound was computed for the proposed preconditioner by finding  $L$  using Theorem 2, then substituting (17) into Theorem 1(b). Note that the bound computed using  $L$  from Theorem 2 does not hold for the SDP preconditioner from [8], since  $L$  will be different between the two preconditioners. Additionally, the SDP preconditioner does not guarantee that  $L_N$  will be block Toeplitz, so Theorem 1 cannot be used to compute horizon-independent limits when it is used.

Comparing the proposed preconditioner against the existing SDP preconditioner, by examining the condition number of the preconditioned Hessian, shows that the two preconditioners produce nearly identical condition numbers, as can be seen in Figures 1b and 2b.

### C. Algorithm Performance

To test the effect of the preconditioners on the actual performance of a first-order method solving the CLQR problem, the Fast Gradient Method (FGM) was implemented in

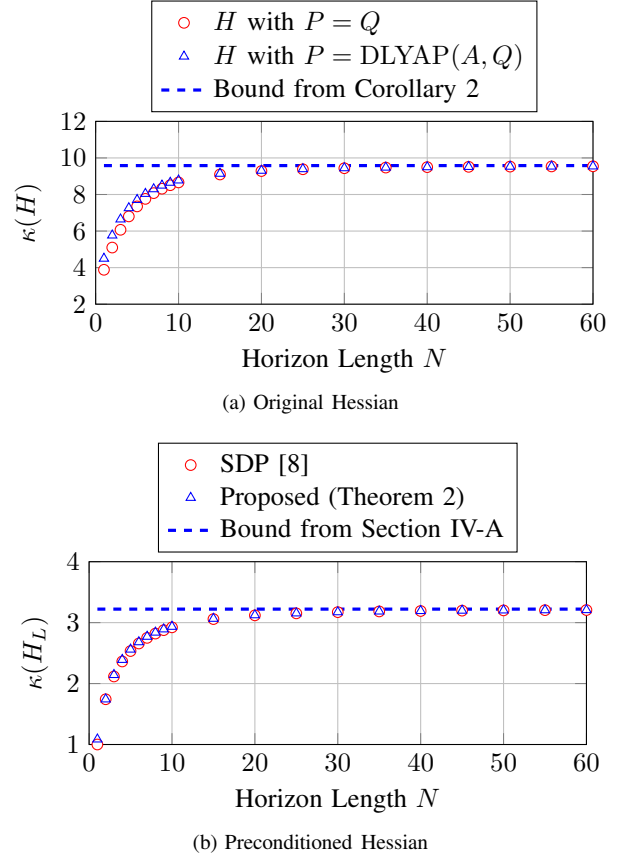


Fig. 1. Condition number versus the horizon length of the condensed Hessian for the Schur-stable system.

Julia using the constant step-size scheme and gradient map stopping criteria from [22]. The inequality constraints were implemented through projection operations, with the non-prestabilized problems being simple projections onto a box and the prestabilized problems requiring a more complex projection algorithm. In these examples, the projections for the prestabilized problems were computed by solving the projection QP directly; however, in an embedded application other techniques, such as Dykstra's method [23] or an explicit QP [24], can be used instead. All CLQR problems were setup with a horizon length of 10, and a desired error of  $10^{-5}$  for the FGM.

We present two sets of results in this section, with Table I showing the condition number of the Hessian with a horizon of 10 and Table II showing the number of iterations required for the FGM to converge to  $\epsilon = 10^{-5}$ .

Both the SDP preconditioner and our proposed preconditioner decrease the condition number by 66% for the Schur-stable system and the already Schur-stable non-prestabilized distillation column. This translates to a 2.1x speedup for the Schur-stable system and a 3.6x speedup for the non-prestabilized distillation column. When the SDP preconditioner is applied to the non-prestabilized inverted pendulum, it has no discernable effect on the iterations required for the FGM to converge, keeping the number of iterations required at 51. Note that the proposed preconditioner is not defined for the non-prestabilized inverted pendulum, since the system is

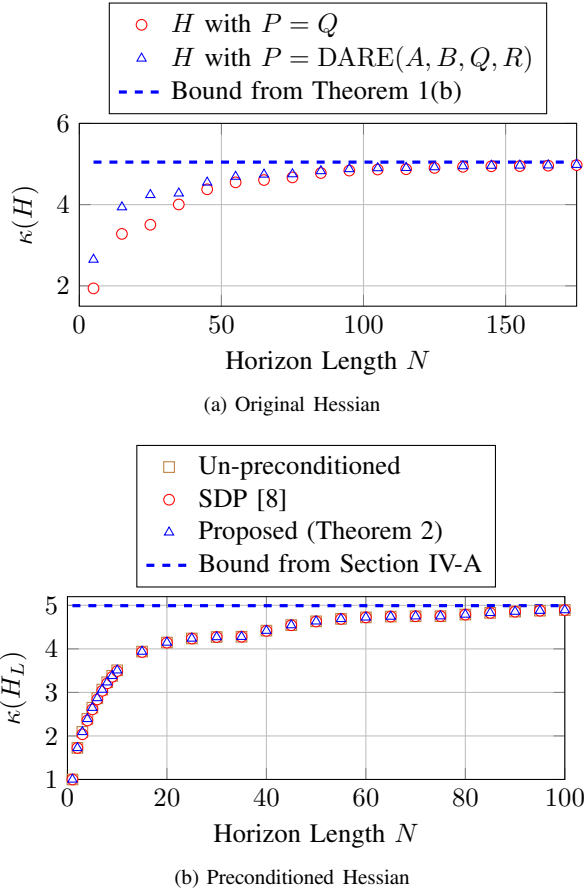


Fig. 2. Condition number versus the horizon length of the pre-stabilized condensed Hessian for the inverted pendulum system.

unstable and  $H$  does not have a convergent matrix symbol.

A large decrease in iterations is caused by applying a prestabilizing controller to the unstable inverted pendulum, which results in a 3.9x speedup. Prestabilizing the already Schur-stable distillation column produces marginal benefit, with the condition number decreasing by only 0.5% and requiring one extra iteration.

While applying the prestabilizing controller to the Schur-stable distillation column produces marginal benefit, applying the preconditioner to the prestabilized distillation column produces a speedup of 6x, a larger speedup than just preconditioning the non-prestabilized system on its own.

## VI. CONCLUSIONS

In this work we presented a preconditioner for the condensed CLQR problem capable of producing up to a 6x speedup for the Fast Gradient Method in our numerical examples. This preconditioner is simple to compute and uses only matrices with dimensions on the order of the number of states and inputs in its computations, as opposed to existing SDP preconditioners that require the full Hessian matrix for their computations. Additionally, we derived results relating the extrema of the spectrum for the condensed Hessian to the extrema of the spectrum for a complex-valued matrix symbol formed using the weighting matrices and the system's transfer function. We also showed that these results can be used to

TABLE I  
CONDITION NUMBER OF THE CONDENSED HESSIAN FOR VARIOUS PRECONDITIONERS WITH  $N = 10$ .

System	None	SDP [8]	Proposed (Thm. 2)
Schur-stable [20]	8.776	2.922	2.933
Inverted pendulum (non-prestabilized)	42.512	42.468	N/A <sup>1</sup>
Inverted pendulum (LQR prestabilized)	3.508	3.489	3.508
Distillation column [21] (non-prestabilized)	3.020	1.006	1.006
Distillation column [21] (LQR prestabilized)	3.004	1.001	1.001

<sup>1</sup> Preconditioner not computable

TABLE II  
ITERATIONS REQUIRED FOR COLD-START CONVERGENCE OF THE FAST GRADIENT METHOD TO  $\epsilon=10^{-5}$  FOR VARIOUS PRECONDITIONERS WITH  $N = 10$ .

System	None	SDP [8]	Proposed (Thm. 2)
Schur-stable [20]	19	9	9
Inverted pendulum (non-prestabilized)	51	51	N/A <sup>1</sup>
Inverted pendulum (LQR prestabilized)	13	12	13
Distillation column [21] (non-prestabilized)	11	3	3
Distillation column [21] (LQR prestabilized)	12	2	2

<sup>1</sup> Preconditioner not computable

estimate the condition number of the Hessian when using our proposed preconditioner.

When applied to several example systems, the proposed preconditioner and an SDP preconditioner achieved comparable reductions in the number of FGM iterations needed to solve the CLQR problem. The prestabilization necessary for computing the proposed preconditioner also reduces the number of FGM iterations required to solve the CLQR problem on its own, but at the expense of turning the constraint sets into more complex shapes.

The derivation and examples in this work focused on preconditioning the primal QP for the CLQR problem, however it is also common to use a dual form of (2) with gradient algorithms such as the Dual Gradient Projection or Dual Fast Gradient Method. The preconditioner defined in Theorem 2 could be extended to also handle the dual problem by using the diagonal blocks of the dual Hessian in the preconditioner instead. The theoretical bounds for the preconditioned Hessian derived in Section IV-A may not be easily extended though, since we have not investigated if the dual Hessian possesses a block Toeplitz structure like the primal Hessian.

This work also highlighted the relationship between the spectrum of the transfer function and the spectrum of the condensed Hessian by showing that the spectrum of the predicted system directly affects the spectrum of the Hessian. We also showed that the numerical prestabilization controller  $K$  has a direct effect on the spectrum of the Hessian, so preconditioning could also be achieved through a careful choice of  $K$  instead of applying a separate preconditioner. Future work could explore developing a preconditioner based on loop-shaping of the system to reduce the Hessian's condition number.

## REFERENCES

- [1] S. Lucia, M. Kögel, P. Zometa, D. E. Quevedo, and R. Findeisen, "Predictive control, embedded cyberphysical systems and systems of systems - A perspective," *Annual Reviews in Control*, vol. 41, pp. 193–207, 2016.
- [2] P. Zometa, M. Kögel, T. Faulwasser, and R. Findeisen, "Implementation aspects of model predictive control for embedded systems," in *2012 American Control Conference (ACC)*. IEEE, 2012, p. 1205–1210.
- [3] J. L. Jerez, P. J. Goulart, S. Richter, G. A. Constantinides, E. C. Kerrigan, and M. Morari, "Embedded Online Optimization for Model Predictive Control at Megahertz Rates," *IEEE Transactions on Automatic Control*, vol. 59, no. 12, pp. 3238–3251, 2014.
- [4] A. Malyshev, R. Quirynen, and A. Knyazev, "Preconditioning of conjugate gradient iterations in interior point MPC method," *IFAC-PapersOnLine*, vol. 51, no. 50, pp. 394–399, 2018.
- [5] R. Quirynen, A. Knyazev, and S. D. Cairano, "Block Structured Preconditioning within an Active-Set Method for Real-Time Optimal Control," in *2018 European Control Conference (ECC)*. Limassol, Cyprus: IEEE, 2018, pp. 1154–1159.
- [6] A. Guiggiani, P. Patrinos, and A. Bemporad, "Fixed-Point Implementation of a Proximal Newton Method for Embedded Model Predictive Control," *Proceedings of the 19th IFAC World Congress*, pp. 2921–2926, 2014.
- [7] P. Giselsson and S. Boyd, "Preconditioning in Fast Dual Gradient Methods," in *53rd IEEE Conference on Decision and Control (CDC)*. Los Angeles, CA: IEEE, 2014, pp. 5040–5045.
- [8] S. Richter, C. N. Jones, and M. Morari, "Computational Complexity Certification for Real-Time MPC With Input Constraints Based on the Fast Gradient Method," *IEEE Transactions on Automatic Control*, vol. 57, no. 6, pp. 1391–1403, 2012.
- [9] M. Miranda and P. Tilli, "Asymptotic spectra of Hermitian block Toeplitz matrices and preconditioning results," *SIAM Journal on Matrix Analysis and Applications*, vol. 21, no. 3, pp. 867–881, 2000.
- [10] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. Scokaert, "Constrained model predictive control: Stability and optimality," *Automatica*, vol. 36, no. 6, pp. 789–814, 2000.
- [11] J. A. Rossiter, B. Kouvaritakis, and M. J. Rice, "A Numerically Robust State-Space Approach to Stable-Predictive Control Strategies," *Automatica*, vol. 34, no. 1, pp. 65–73, 1998.
- [12] O. J. Rojas and G. C. Goodwin, "On the asymptotic properties of the Hessian in discrete-time linear quadratic control," in *2004 American Control Conference (ACC)*. Boston, MA: IEEE, 2004, pp. 239–244.
- [13] G. C. Goodwin, M. M. Seron, and J. A. De Dona, *Constrained Control and Estimation - An Optimisation Based Approach*. London, UK: Springer, 2005.
- [14] K. B. Peterson and M. S. Pederson, "The Matrix Cookbook," 2012.
- [15] J. Gutiérrez-Gutiérrez and P. M. Crespo, "Block Toeplitz Matrices: Asymptotic Results and Applications," *Foundations and Trends in Communications and Information Theory*, vol. 8, no. 3, pp. 179–257, 2012.
- [16] R. A. Horn and C. R. Johnson, *Matrix Analysis*, 2nd ed. Cambridge, UK: Cambridge University Press, 2013.
- [17] —, *Topics in Matrix Analysis*. Cambridge, UK: Cambridge University Press, 1994.
- [18] R. H. Chan and X.-Q. Jin, *An Introduction to Iterative Toeplitz Solvers*. SIAM, 2007.
- [19] G. Strang, "A proposal for toeplitz matrix calculations," *Studies in Applied Mathematics*, vol. 74, no. 2, p. 171–176, 1986.
- [20] C. N. Jones and M. Morari, "The Double Description Method for the Approximation of Explicit MPC Control Laws," in *47th IEEE Conference on Decision and Control (CDC)*. Cancun, Mexico: IEEE, 2008, pp. 4724–4730.
- [21] "Benchmark Problems for Control System Design: Report of the IFAC Theory Committee," IFAC, Tech. Rep., 1990. [Online]. Available: <https://taskforce.ifac-control.org/industry-committee/reference-materials/benchmark-problems/>
- [22] S. Richter, "Computational complexity certification of gradient methods for real-time model predictive control," Doctoral Thesis, ETH Zurich, 2012.
- [23] N. Gaffke and R. Mathar, "A cyclic projection algorithm via duality," *Metrika*, vol. 36, no. 1, pp. 29–54, 1989.
- [24] S. Merkli, J. Jerez, A. Domahidi, R. S. Smith, and M. Morari, "Circuit Generation for Efficient Projection onto Polyhedral Sets in First-Order Methods," in *2015 European Control Conference (ECC)*. Linz, Austria: IEEE, 2015, pp. 3440–3445.