

Formal Estimation of Collision Risks for Autonomous Vehicles: A Compositional Data-Driven Approach*

Abolfazl Lavaei¹, Luigi Di Lillo², Andrea Censi¹, and Emilio Frazzoli¹

¹Institute for Dynamic Systems and Control, ETH Zurich, Switzerland

²Property and Casualty Solutions, Reinsurance, Swiss Reinsurance Company, Ltd., Zurich, Switzerland

{alavaei,acensi,efrazzoli}@ethz.ch, Luigi_DiLillo@swissre.com

ABSTRACT. In this work, we propose a compositional data-driven approach for the formal estimation of collision risks for autonomous vehicles (AVs) with black-box dynamics while acting in a stochastic multi-agent framework. The proposed approach is based on the construction of sub-barrier certificates for each stochastic agent via a set of data collected from its trajectories while providing an a-priori guaranteed confidence on the data-driven estimation. In our proposed setting, we first cast the original collision risk problem for each agent as a robust optimization program (ROP). Solving the acquired ROP is not tractable due to an unknown model that appears in one of its constraints. To tackle this difficulty, we collect finite numbers of data from trajectories of each agent and provide a scenario optimization program (SOP) corresponding to the original ROP. We then establish a probabilistic bridge between the optimal value of SOP and that of ROP, and accordingly, we formally construct a sub-barrier certificate for each unknown agent based on the number of data and a required level of confidence. We then propose a compositional technique based on small-gain reasoning to quantify the collision risk for multi-agent AVs with some desirable confidence based on sub-barrier certificates of individual agents constructed from data. For the case that the proposed compositionality conditions are not satisfied, we provide a relaxed version of compositional results without requiring any compositionality conditions but at the cost of providing a potentially conservative collision risk. Eventually, we also present our approaches for *non-stochastic* multi-agent AVs. We demonstrate the effectiveness of our proposed results by applying them to a vehicle platooning consisting of 100 vehicles with 1 leader and 99 followers. We formally estimate the collision risk for the whole network by collecting sampled data from trajectories of each agent.

1. INTRODUCTION

In the near future, we expect to see fully autonomous vehicles (AVs), aircrafts, and robots, all of which should be able to make their own decisions without direct human involvement. Although this technology theme for AVs provides many potential advantages, *e.g.*, fewer traffic collisions, reduced traffic congestion, increased roadway capacity, relief of vehicle occupants from driving, etc., there have been at least two critical challenges that need to be considered. First and foremost, closed-form mathematical models for many complex

*This work was supported in part by the Swiss Reinsurance Company, Ltd.

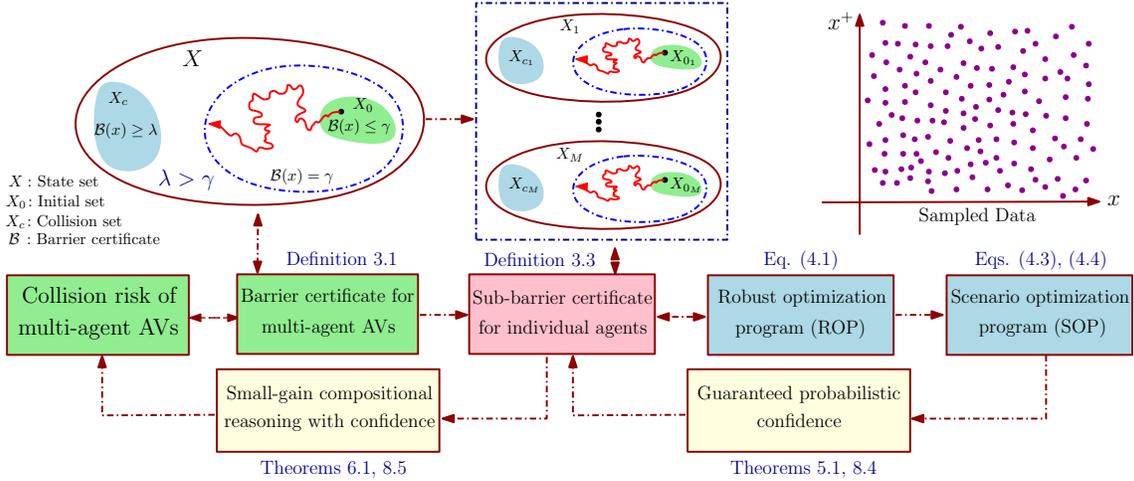


FIGURE 1. A graphical representation of the article’s structure and contributions.

and heterogeneous physical systems, including AVs, are either not available or equally complex to be of any practical use. Accordingly, one cannot employ model-based techniques to analyze this type of complex unknown systems. Although there are some model identification techniques available in the relevant literature to learn an approximate model from data, *e.g.*, [1, and references herein], acquiring an accurate model for complex systems is always complicated, time-consuming and expensive. As the second difficulty, providing safety certification and guaranteeing correctness of the design of such AVs in a formal as well as time- and cost-effective way have been always the major obstacles in their successful deployment. These main challenges motivated us to develop a compositional data-driven approach to bypass the system identification phase and directly evaluate the AVs performance based on data collected from trajectories of unknown agents.

Over the past few years, a number of advances have been made in developing various techniques for evaluating AVs performance. Such techniques have mainly relied on methods from artificial intelligence (AI), machine learning, control theory, and optimization, *e.g.*, [2, 3, 4, 5, 6], to name a few. Another promising approach for the safety verification of complex dynamical systems is to employ *barrier certificates*, initially introduced in [7, 8]. This approach has received significant attentions in the past decade, as a *discretization-free technique*, for formal verification and synthesis of non-stochastic [9, 10, 11, 12, 13, 14, 15], and stochastic dynamical systems [16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28], to name a few. In particular, barrier certificates are Lyapunov-like functions defined over the state space of the system to enforce a set of inequalities on both the function itself and its one-step transition. An appropriate level set of a barrier certificate separates an unsafe region, we call it here *collision set*, from all system trajectories starting from a given set of initial states. Consequently, the existence of such a function provides a formal probabilistic certificate for the safety of the system (cf. Fig. 1).

Our main contribution in this work is to propose, for the first time, a compositional data-driven scheme for the formal estimation of collision risks for stochastic multi-agent AVs with black-box dynamics. Our proposed approach is based on the construction of sub-barrier certificates for each agent via a set of data collected from its trajectories. To do so, we first reformulate the original collision risk problem as a robust optimization program (ROP). Since the proposed ROP is not tractable due to an unknown model appearing in its constraints, we collect finite numbers of data from trajectories of each agent and provide a scenario optimization program (SOP) corresponding to the original ROP. We then build a probabilistic relation between the optimal value of SOP and that of ROP, and as a result, we formally construct a sub-barrier certificate for each agent based on the number of data and a required level of confidence. We propose a compositional technique based on small-gain conditions to quantify the collision risk for the multi-agent AV via sub-barrier certificates of individual agents constructed from data. We also propose a relaxed version of compositional results without requiring any compositionality condition but at the cost of providing a potentially conservative collision risk. Finally, we also present our proposed approaches for *non-stochastic* multi-agent AVs. We demonstrate the effectiveness of our proposed techniques by applying them to a vehicle platooning consisting of 100 vehicles with 1 leader and 99 followers (presented as a running example). Proofs of all statements are provided in Appendix. A graphical representation of the structure of the article and its contributions is illustrated in Fig. 1.

Data-driven safety verification of stochastic systems via barrier certificates is also studied in [29]. Our proposed approach here differs from the one in [29] in three main directions. First and foremost, we propose here a compositional data-driven scheme based on small-gain reasoning for the formal estimation of collision risks for multi-agent AVs, whereas the results in [29] only deal with monolithic systems, and accordingly, they are not practical in the case of facing high-dimensional systems. Moreover, we propose here a relaxed compositional approach in the case that our compositionality conditions are not fulfilled. Second, we propose our approaches for both *stochastic and non-stochastic* large-scale systems, while the results of [29] are only tailored to stochastic systems. As the last main contribution, in order to propose our compositional results, we deal here with a non-convex class of robust and scenario optimization programs, whereas the proposed results in [29] are only applicable to convex optimization problems.

The rest of the paper is organized as follows. Section 2 gives mathematical preliminaries and notation, and formal definitions of stochastic (multi)agent AVs. Section 3 provides notions of (sub)barrier certificates. Section 4 is dedicated to data-driven construction of sub-barrier certificates. In Section 5, we establish a formal relation between the optimal value of SOP and that of ROP. Section 6 contains the main compositionality results for multi-agent AVs based on small-gain reasoning. In Section 7, we propose a relaxed version of compositional results in which the compositionality conditions are no longer required. We present our results for *non-stochastic* multi-agent AVs in Section 8.

2. PROBLEM DESCRIPTION

2.1. Preliminaries and Notation. We consider a probability space $(\Omega, \mathcal{F}_\Omega, \mathbb{P}_\Omega)$, where Ω is the sample space, \mathcal{F}_Ω is a sigma-algebra on Ω comprising subsets of Ω as events, and \mathbb{P}_Ω is a probability measure assigning probabilities to events. We assume that random variables introduced in this article are measurable functions of the form $X : (\Omega, \mathcal{F}_\Omega) \rightarrow (\mathcal{V}_X, \mathcal{F}_X)$. Given the probability space $(\Omega, \mathcal{F}_\Omega, \mathbb{P}_\Omega)$, we denote the N -Cartesian product set of Ω by Ω^N , and its corresponding product measure by \mathbb{P}^N . A random variable ς with standard normal distributions (zero mean and variance of identity) is denoted by $\varsigma(\cdot) \sim \mathcal{N}(0, \mathbb{I}_n)$. A topological space S is called a Borel space if it is homeomorphic to a Borel subset of a Polish space (*i.e.*, a separable and completely metrizable space). Any Borel space S is assumed to be endowed with a Borel sigma-algebra, which is denoted by $\mathbb{B}(S)$.

We denote the set of real, positive and non-negative real numbers by $\mathbb{R}, \mathbb{R}^+,$ and \mathbb{R}_0^+ , respectively. $\mathbb{N} := \{0, 1, 2, \dots\}$ represents the set of non-negative integers and $\mathbb{N}_{\geq 1} = \{1, 2, \dots\}$ is the set of positive integers. Given M vectors $x_i \in \mathbb{R}^{n_i}$, $x = [x_1; \dots; x_M]$ denotes the corresponding column vector of dimension $\sum_i n_i$. Given a symmetric matrix A , $\lambda_{\max}(A)$ denotes the maximum eigenvalue of A . Given any $a \in \mathbb{R}$, $|a|$ denotes the absolute value of a . Given a vector $x \in \mathbb{R}^n$, $\|x\|$ denotes the Euclidean norm of x . For any matrix $P \in \mathbb{R}^{m \times n}$, we have $\|P\| := \sqrt{\lambda_{\max}(P^\top P)}$. We denote the indicator function of a subset \mathcal{A} of a set X by $\mathbf{1}_{\mathcal{A}} : X \rightarrow \{0, 1\}$, where $\mathbf{1}_{\mathcal{A}}(x) = 1$ if and only if $x \in \mathcal{A}$, and 0 otherwise. Symbol $\mathbf{1}_n$ denotes a column vector in $\mathbb{R}^{n \times 1}$ with all elements equal to one. If a system \mathcal{A} satisfies a property φ , we denote it by $\mathcal{A} \models \varphi$. We also use \models to show the *feasibility* of a solution for an optimization problem. Given functions $f_i : X_i \rightarrow Y_i$, for any $i \in \{1, \dots, M\}$, their Cartesian product $\prod_{i=1}^M f_i : \prod_{i=1}^M X_i \rightarrow \prod_{i=1}^M Y_i$ is defined by $(\prod_{i=1}^M f_i)(x_1, \dots, x_M) = [f_1(x_1); \dots; f_M(x_M)]$. Given a measurable function $f : \mathbb{N} \rightarrow \mathbb{R}^n$, the (essential) supremum of f is denoted by $\|f\|_\infty := (\text{ess})\sup\{\|f(k)\|, k \geq 0\}$. A function $\phi : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$ is said to be a class \mathcal{K} function if it is continuous, strictly increasing, and $\phi(0) = 0$. A class \mathcal{K} function $\phi(\cdot)$ belongs to class \mathcal{K}_∞ if $\phi(s) \rightarrow \infty$ as $s \rightarrow \infty$.

2.2. Stochastic (Multi-)Agent AVs. In this work, we consider dynamics of each agent as a discrete-time *stochastic* system, as formalized in the following definition.

Definition 2.1. *Each agent of AVs is a tuple*

$$\mathcal{A}_i = (X_i, W_i, \varsigma_i, f_i), \tag{2.1}$$

where:

- $X_i \subseteq \mathbb{R}^{n_i}$ is a Borel space as the state set of the agent;
- $W_i \subseteq \mathbb{R}^{p_i}$ is a Borel space as the interaction set of the agent;

- ς_i is a sequence of independent-and-identically distributed (i.i.d.) random variables from the sample space Ω_i to a measurable space $(\mathcal{V}_{\varsigma_i}, \mathcal{F}_{\varsigma_i})$, i.e.,

$$\varsigma_i := \{\varsigma_i(k) : (\Omega_i, \mathcal{F}_{\Omega_i}) \rightarrow (\mathcal{V}_{\varsigma_i}, \mathcal{F}_{\varsigma_i}), k \in \mathbb{N}\};$$

- $f_i : X_i \times W_i \times \mathcal{V}_{\varsigma_i} \rightarrow X_i$ is a measurable function characterizing the state evolution of \mathcal{A}_i .

The evolution of the state of \mathcal{A}_i for a given initial state $x_{0_i} = x_i(0) \in X_i$ and an interaction sequence $\{w_i(k) : \Omega_i \rightarrow W_i, k \in \mathbb{N}\}$ is described as

$$\mathcal{A}_i : x_i(k+1) = f_i(x_i(k), w_i(k), \varsigma_i(k)), \quad k \in \mathbb{N}. \quad (2.2)$$

We call the random sequence $x_{x_{0_i}, w_i} : \Omega_i \times \mathbb{N} \rightarrow X_i$ satisfying (2.2) the *solution process* of \mathcal{A}_i under an interaction w_i and an initial state x_{0_i} .

Since the main goal in this work is to formally estimate the collision risks for AVs, we assume that the controller for each agent is already designed and deployed to the system. There is no requirement on the type of controllers in our setting. We model the effect of other agents, influencing the state of the current agent, via interactions w_i which can be also captured by the deployed closed-loop controller inside AVs. In the following, we provide a formal definition of multi-agent AVs without interactions w_i that is considered as a composition of several agents with interactions.

Definition 2.2. Consider $M \in \mathbb{N}_{\geq 1}$ agents $\mathcal{A}_i = (X_i, W_i, \varsigma_i, f_i)$, $i \in \{1, \dots, M\}$, with their interactions partitioned as

$$w_i = [w_{i1}; \dots; w_{i(i-1)}; w_{i(i+1)}; \dots; w_{iM}], \quad w_{ij} \in W_{ij}, \quad (2.3)$$

where $W_i := \prod_j W_{ij}$. A multi-agent AV is defined as $\mathcal{A} = (X, \varsigma, f)$, denoted by $\mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$, such that $X := \prod_{i=1}^M X_i$, $\varsigma = [\varsigma_1; \dots; \varsigma_M]$, and $f := \prod_{i=1}^M f_i$ subjected to the following interconnection constraint:

$$\forall i, j \in \{1, \dots, M\}, i \neq j: w_{ij} = x_j, \quad X_j \subseteq W_{ij}. \quad (2.4)$$

Such a multi-agent AV can be represented by

$$\mathcal{A} : x(k+1) = f(x(k), \varsigma(k)), \quad k \in \mathbb{N}, \quad \text{with } f : X \times \mathcal{V}_{\varsigma} \rightarrow X. \quad (2.5)$$

For the sake of a better illustration of the results, we provide our case study as a running example throughout the paper.

Case Study: Vehicle Platooning. Consider a vehicle platooning in a network of 100 vehicles with 1 leader and 99 followers (see Fig. 2). The model of this case study is adapted from [30]. The evolution of states can




FIGURE 2. Vehicle platooning in a network of 100 vehicles.

be described by the following multi-agent AV:

$$\mathcal{A}: x(k+1) = Ax(k) + u(k) + R\varsigma(k),$$

where A is a block matrix with diagonal blocks A_x , and off-diagonal blocks $A_{i(i-1)} = A_w, i \in \{2, \dots, M\}$, where

$$A_x = \begin{bmatrix} 1 & -1 \\ 0 & 1 \end{bmatrix}, \quad A_w = \begin{bmatrix} 0 & \varpi \\ 0 & 0 \end{bmatrix},$$

with $\varpi = 0.01$ being the interconnection degree, and all other off-diagonal blocks are zero matrices of appropriate dimensions. Moreover, R is a partitioned matrix with main diagonal blocks $\bar{R} = \begin{bmatrix} 0.03 & 0 \\ 0 & 0.06 \end{bmatrix}$, and all other off-diagonal blocks being zero matrices of appropriate dimensions. Furthermore, $x(k) = [x_1(k); \dots; x_M(k)]$, $\varsigma(k) = [\varsigma_1(k); \dots; \varsigma_M(k)]$, and $u(k) = [u_1(k); \dots; u_M(k)]$, where $u_i(k)$ is the control input for each agent. By considering each individual agent \mathcal{A}_i described as

$$\mathcal{A}_i: x_i(k+1) = A_x x_i(k) + u_i(k) + A_w w_i(k) + \bar{R} \varsigma_i(k),$$

one can readily verify that $\mathcal{A} = \mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$, where $w_i(k) = [0; w_{i(i-1)}(k)], i \in \{1, \dots, M\}$, (with $w_{i(i-1)} = x_{i-1}, w_{1,0} = 0$). The state of the i -th vehicle is defined as $x_i = [d_i; \nu_i]$, for any $i \in \{1, \dots, M\}$, where d_i denotes the relative distance between the vehicle i and its preceding vehicle $i-1$ (the 0-th vehicle represents the leader), and ν_i is its velocity in the leader's frame. The overall control objective in vehicle platooning is for each vehicle to adjust its speed in order to maintain a safe distance from the vehicle ahead. We assume that the controller for each agent is already designed and deployed as $u_i = [-0.2d_i + 1.1\nu_i + 0.1; 0.01d_i - 0.9\nu_i]$, for any $i \in \{1, \dots, M\}$.

In the next section, in order to estimate the collision risk for multi-agent AVs in finite time horizons, we present notions of barrier and sub-barrier certificates for, respectively, multi-agent AVs \mathcal{A} (without interactions) and individual agents \mathcal{A}_i (with interactions).

3. (SUB-)BARRIER CERTIFICATES

In this section, we first present the notion of barrier certificates for multi-agent AVs \mathcal{A} without interactions, as the following definition.

Definition 3.1. *Given the multi-agent AV $\mathcal{A} = (X, \varsigma, f)$, a non-negative function $\mathcal{B}: X \rightarrow \mathbb{R}_0^+$ is called a barrier certificate (BC) for \mathcal{A} if there exist $\gamma, \lambda \in \mathbb{R}^+$, with $\lambda > \gamma$, $0 < \kappa < 1$, and $\psi \in \mathbb{R}_0^+$, such that:*

$$\mathcal{B}(x) \leq \gamma, \quad \forall x \in X_0, \quad (3.1)$$

$$\mathcal{B}(x) \geq \lambda, \quad \forall x \in X_c, \quad (3.2)$$

$$\mathbb{E}[\mathcal{B}(f(x, \varsigma)) \mid x] \leq \kappa \mathcal{B}(x) + \psi, \quad \forall x \in X, \quad (3.3)$$

where $X_0, X_c \subseteq X$ are initial and collision sets, respectively.

Given a collision event $\varphi = (X_0, X_c, \mathcal{T})$, the multi-agent AV \mathcal{A} may have a collision, denoted by $\mathcal{A} \models_{\mathcal{T}} \varphi$, if a trajectory of \mathcal{A} starting from the initial set X_0 reaches the collision set X_c within the time horizon \mathcal{T} . Since trajectories of the multi-agent AV are probabilistic, we are interested in computing the collision risk $\mathbb{P}\{\mathcal{A} \models_{\mathcal{T}} \varphi\}$. Now we employ Definition 3.1 and quantify the collision risk for the multi-agent AVs in (2.5) via the next theorem [31].

Theorem 3.2. *Consider the multi-agent AV \mathcal{A} defined in Definition 2.2 and a finite time horizon $\mathcal{T} \in \mathbb{N}$. Suppose there exists a non-negative barrier certificate \mathcal{B} satisfying conditions (3.1)-(3.3). Then the collision risk for the multi-agent AV \mathcal{A} is bounded by*

$$\mathbb{P}\{\mathcal{A} \models_{\mathcal{T}} \varphi\} \leq \begin{cases} 1 - (1 - \frac{\gamma}{\lambda})(1 - \frac{\psi}{\lambda})^{\mathcal{T}}, & \text{if } \lambda \geq \frac{\psi}{1-\kappa}, \\ (\frac{\gamma}{\lambda})\kappa^{\mathcal{T}} + (\frac{\psi}{(1-\kappa)\lambda})(1 - \kappa^{\mathcal{T}}), & \text{if } \lambda < \frac{\psi}{1-\kappa}. \end{cases} \quad (3.4)$$

In general, searching for barrier certificates for multi-agent AVs as in Definition 3.1 is computationally very expensive, even if the model is known, mainly due to the high-dimension of the underlying system. Accordingly, we present in the following a definition of sub-barrier certificates (SBC) for individual agents \mathcal{A}_i and propose in Section 6 a compositional approach based on small-gain reasoning to construct a BC of multi-agent AVs based on SBC of individual agents.

Definition 3.3. Given an agent $\mathcal{A}_i = (X_i, W_i, \varsigma_i, f_i)$, a non-negative function $\mathcal{B}_i : X_i \rightarrow \mathbb{R}_0^+$ is called a sub-barrier certificate (SBC) for \mathcal{A}_i if there exist $\gamma_i, \lambda_i \in \mathbb{R}^+$, $\alpha_i, \rho_i, \psi_i \in \mathbb{R}_0^+$, and $0 < \kappa_i < 1$, such that:

$$\mathcal{B}_i(x_i) \geq \alpha_i \|x_i\|^2, \quad \forall x_i \in X_i, \quad (3.5)$$

$$\mathcal{B}_i(x_i) \leq \gamma_i, \quad \forall x_i \in X_{0_i}, \quad (3.6)$$

$$\mathcal{B}_i(x_i) \geq \lambda_i, \quad \forall x_i \in X_{c_i}, \quad (3.7)$$

$$\mathbb{E} \left[\mathcal{B}_i(f_i(x_i, w_i, \varsigma_i)) \mid x_i, w_i \right] \leq \kappa_i \mathcal{B}_i(x_i) + \rho_i \|w_i\|^2 + \psi_i, \quad \forall x_i \in X_i, \forall w_i \in W_i, \quad (3.8)$$

where $X_{0_i}, X_{c_i} \subseteq X_i$ are initial and collision sets of agents, respectively.

Remark 3.4. Note that α_i and ρ_i in Definition 3.3 could be, without loss of generality, \mathcal{K}_∞ functions as proposed in [32]. We allow them in this work to be linear for the sake of an easier presentation.

Case Study: Vehicle Platooning (continued). Regions of interest for each vehicle are given as $X_i = [0, 0.7] \times [-3.55, 0.2]$, $X_{0_i} = [0.35, 0.7] \times [-0.9, 0.2]$, and $X_{c_i} = [0, 0.3] \times [-3.55, -2.9]$, for all $i \in \{1, \dots, M\}$. We fix the structure of our sub-barrier certificates as $\mathcal{B}_i(q_i, x_i) = q_{i_1} d_i^2 + q_{i_2} d_i^4 + q_{i_3} d_i \nu_i + q_{i_4} \nu_i^4 + q_{i_5} \nu_i^2$, for all $i \in \{1, \dots, 100\}$, with unknown coefficients q_{i_1} - q_{i_5} .

In the next section, we provide our data-driven scheme for the construction of SBC for each agent.

4. DATA-DRIVEN CONSTRUCTION OF SBC

In this section, we assume that the transition map f_i and the distribution of ς_i in (2.2) are both unknown, and we employ the term *black-box* models to refer to this type of systems. We fix the structure of SBC as $\mathcal{B}_i(q_i, x_i) = \sum_{j=1}^r q_{i_j} \bar{p}_{i_j}(x_i)$ with some user-defined (possibly nonlinear) basis functions $\bar{p}_{i_j}(x_i)$ and unknown coefficients $q_i = [q_{i_1}; \dots; q_{i_r}] \in \mathbb{R}^r$. It is worth mentioning that our proposed techniques do not put any restrictions on the type of basis functions in the structure of SBC. For instance, in the case of having polynomial-type barrier certificates, basis functions $\bar{p}_{i_j}(x_i)$ are monomials over x_i .

In order to enforce conditions (3.5)-(3.8) in Definition 3.3, we first cast our collision risk problem for each agent as the following robust optimization program (ROP), for any $i \in \{1, \dots, M\}$:

$$\text{ROP: } \begin{cases} \min_{[\Theta_i; \eta_i]} & \eta_i \\ \text{s.t.} & \max \left\{ g_{i_z}(x_i, \Theta_i), g_{i_5}(x_i, w_i, \Theta_i) \right\} \leq \eta_i, \\ & z \in \{1, \dots, 4\}, \forall x_i \in X_i, \forall w_i \in W_i, \end{cases} \quad (4.1)$$

where:

$$\begin{aligned}
\Theta_i &= [\gamma_i; \lambda_i; \alpha_i; \kappa_i; \rho_i; \psi_i; q_{i_1}; \dots; q_{i_r}], \\
\eta_i &\in \mathbb{R}, \gamma_i, \lambda_i \in \mathbb{R}^+, \alpha_i, \rho_i, \psi_i \in \mathbb{R}_0^+, \kappa_i \in (0, 1), \\
g_{i_1} &= -\mathcal{B}_i(q_i, x_i), \quad g_{i_2} = \alpha_i \|x_i\|^2 - \mathcal{B}_i(q_i, x_i), \\
g_{i_3} &= (\mathcal{B}_i(q_i, x_i) - \gamma_i) \mathbf{1}_{X_{0_i}}(x_i), \quad g_{i_4} = (\lambda_i - \mathcal{B}_i(q_i, x_i)) \mathbf{1}_{X_{c_i}}(x_i), \\
g_{i_5} &= \mathbb{E} \left[\mathcal{B}_i(q_i, f_i(x_i, w_i, \varsigma_i)) \mid x_i, w_i \right] - \kappa_i \mathcal{B}_i(q_i, x_i) - \rho_i \|w_i\|^2 - \psi_i,
\end{aligned} \tag{4.2}$$

with $\mathbf{1}_{X_{0_i}}(x_i)$ and $\mathbf{1}_{X_{c_i}}(x_i)$ being indicator functions acting on initial and collision sets, respectively. We denote the optimal value of ROP by $\eta_{R_i}^*$. If $\eta_{R_i}^* \leq 0$, a solution to the ROP implies the satisfaction of conditions (3.5)-(3.8) in Definition 3.3.

To solve the proposed ROP in (4.1), we face two major difficulties. First, the proposed ROP in (4.1) has infinitely-many constraints since the state and interaction of \mathcal{A}_i both live in continuous sets (*i.e.*, $x_i \in X_i$, $w_i \in W_i$). In addition and more importantly, one needs to know the precise map f_i in g_{i_5} in order to solve the optimization problem in (4.1). To tackle these two difficulties, we propose a scenario optimization program corresponding to the original ROP. Suppose $(\hat{x}_{i_l}, \hat{w}_{i_l})_{l=1}^{N_i}$ denote N_i i.i.d. sampled data within $X_i \times W_i$. We take two consecutive sampled data-points from trajectories of \mathcal{A}_i as the pair of $(x_i(k), x_i(k+1))$ and denote it by $(\hat{x}_i, f_i(\hat{x}_i, \hat{w}_i, \varsigma_i))$. We now propose the following scenario optimization program (SOP), for any $i \in \{1, \dots, M\}$:

$$\text{SOP}_N: \begin{cases} \min_{[\Theta_i; \eta_i]} & \eta_i \\ \text{s.t.} & \max \left\{ g_{i_z}(\hat{x}_{i_l}, \Theta_i), g_{i_5}(\hat{x}_{i_l}, \hat{w}_{i_l}, \Theta_i) \right\} \leq \eta_i, \\ & z \in \{1, \dots, 4\}, \forall \hat{x}_{i_l} \in X_i, \forall \hat{w}_{i_l} \in W_i, \\ & \forall l \in \{1, \dots, N_i\}, \end{cases} \tag{4.3}$$

where:

$$\begin{aligned}
\Theta_i &= [\gamma_i; \lambda_i; \alpha_i; \kappa_i; \rho_i; \psi_i; q_{i_1}; \dots; q_{i_r}], \\
\eta_i &\in \mathbb{R}, \gamma_i, \lambda_i \in \mathbb{R}^+, \alpha_i, \rho_i, \psi_i \in \mathbb{R}_0^+, \kappa_i \in (0, 1),
\end{aligned}$$

and g_{i_1} - g_{i_5} are the functions as defined in (4.2). We denote the optimal value of SOP_N by $\eta_{N_i}^*$. Although the problems of infinitely-many constraints and unknown map f_i are resolved in SOP_N , there is still no closed-form solution for the expected value in g_{i_5} . Hence, we employ an empirical approximation of the expected value and propose a new scenario optimization problem, denoted by SOP_ς , for any $i \in \{1, \dots, M\}$:

$$\text{SOP}_\zeta : \begin{cases} \min_{[\Theta_i; \eta_i]} & \eta_i \\ \text{s.t.} & \max \left\{ g_{i_z}(\hat{x}_{i_l}, \Theta_i), \bar{g}_{i_5}(\hat{x}_{i_l}, \hat{w}_{i_l}, \Theta_i) \right\} \leq \eta_i, \\ & z \in \{1, \dots, 4\}, \forall \hat{x}_{i_l} \in X_i, \forall \hat{w}_{i_l} \in W_i, \\ & \forall l \in \{1, \dots, N_i\}, \end{cases} \quad (4.4)$$

with

$$\begin{aligned} \Theta_i &= [\gamma_i; \lambda_i; \alpha_i; \kappa_i; \rho_i; \psi_i; q_{i_1}; \dots; q_{i_r}], \\ \eta_i &\in \mathbb{R}, \gamma_i, \lambda_i \in \mathbb{R}^+, \alpha_i, \rho_i, \psi_i \in \mathbb{R}_0^+, \kappa_i \in (0, 1), \\ \bar{g}_{i_5}(\hat{x}_{i_l}, \hat{w}_{i_l}, \Theta_i) &= \frac{1}{\hat{N}_i} \sum_{j=1}^{\hat{N}_i} \mathcal{B}_i(q_i, f_i(\hat{x}_{i_l}, \hat{w}_{i_l}, \hat{s}_{i_j})) - \kappa_i \mathcal{B}_i(q_i, \hat{x}_{i_l}) - \rho_i \|\hat{w}_{i_l}\|^2 - \psi_i + \mu_i, \end{aligned} \quad (4.5)$$

where $\hat{N}_i \in \mathbb{N}$ and $\mu_i \in \mathbb{R}_0^+$ are, respectively, the number of samples required for the empirical approximation and the corresponding error introduced by this approximation. We denote the optimal value of the objective function SOP_ζ by $\eta_{\zeta_i}^*$.

Remark 4.1. Note that condition \bar{g}_{i_5} is not convex due to a bilinearity between decision variables q_i and the unknown variable κ_i . Although a mild convexity can be observed since both κ_i and q_i are scalar, the SOP_ζ in (4.4) is in principle non-convex. To tackle this issue, we consider κ_i in a finite set with a cardinality m_i while solving SOP_ζ in (4.4). Accordingly, we propose our data-driven approach in Section 5 by employing the cardinality m_i in computing the minimum number of data required for solving SOP_ζ (4.4) (cf. Theorem 5.1).

Remark 4.2. Since the collected data required for solving SOP_ζ (4.4) should be i.i.d., one is allowed to take only one paired sample $(\hat{x}_i, f_i(\hat{x}_i, \hat{w}_i, \zeta_i))$ from each trajectory of unknown systems. However, the data can be collected with any arbitrary distribution.

The next lemma, borrowed from [29], employs Chebyshev's inequality [33] to establish a relation between solutions of SOP_ζ and SOP_N with a required number of data \hat{N}_i , an approximation error μ_i , and a desired confidence $\beta_{1_i} \in (0, 1]$.

Lemma 4.3. Suppose $\hat{\mathcal{B}}_i(q_i, x_i)$ is a solution for SOP_ζ in (4.4). For an a-priori approximation error $\mu_i \in \mathbb{R}^+$, a desired confidence $\beta_{1_i} \in (0, 1]$, and an upper bound \mathcal{Q}_i on the variance of the sub-barrier certificate applied on f_i , i.e., $\text{Var}[\mathcal{B}_i(q_i, f_i(x_i, w_i, \zeta_i))] \leq \mathcal{Q}_i \in \mathbb{R}^+, \forall x_i \in X_i, w_i \in W_i$, one has

$$\mathbb{P}\left\{\hat{\mathcal{B}}_i(q_i, x_i) \models \text{SOP}_N\right\} \geq 1 - \beta_{1_i}, \quad \text{with } \hat{N}_i \geq \frac{\mathcal{Q}_i}{\beta_{1_i} \mu_i^2},$$

for any $i \in \{1, \dots, M\}$.

Remark 4.4. As it can be observed from Lemma 4.3, there is a relation between approximation error μ_i , confidence β_{1_i} and the required number of data \hat{N}_i . One can arbitrarily select μ_i , β_{1_i} and compute the required number of data \hat{N}_i based on Lemma 4.3. The obtained \hat{N}_i is then utilized for computing the empirical approximation in (4.5).

5. CONSTRUCTION OF SBC FOR UNKNOWN AGENTS

In this section, we aim at establishing a formal relation between the optimal value of SOP_ζ in (4.4) and that of ROP in (4.1), inspired by the fundamental results of [34]. Accordingly, we formally quantify the SBC of unknown agents based on the number of data and a required level of confidence. To do so, we first raise the following assumption.

Assumption 1. Functions $g_{i_1}-g_{i_4}$ are all Lipschitz continuous with respect to x_i , and g_{i_5} is Lipschitz continuous with respect to x_i, w_i , with, respectively, Lipschitz constants $\mathcal{L}_{g_{i_1}}-\mathcal{L}_{g_{i_4}}$, $\mathcal{L}_{g_{i_5}}$, for given κ_{i_k} , where $k \in \{1, \dots, m_i\}$.

We provide some explicit approaches in Lemmas 10.1, 10.3 to compute the required Lipschitz constants in Assumption 1. We now propose the main result of this section.

Theorem 5.1. Consider an unknown agent \mathcal{A}_i as in (2.2), and initial and collision regions X_{0_i} and X_{c_i} , respectively. Let Assumption 1 hold. Consider the corresponding SOP_ζ in (4.4) with its associated optimal value $\eta_{\zeta_i}^*$ and the solution $\Theta_i^* = [\gamma_i^*; \lambda_i^*; \alpha_i^*; \rho_i^*; \psi_i^*; q_{i_1}^*; \dots; q_{i_r}^*]$, with $N_i(\bar{\varepsilon}_{2_i}, \beta_{2_i})$, $\bar{\varepsilon}_{2_i} := (\varepsilon_{2_{i_1}}, \dots, \varepsilon_{2_{i_m}})$, where

$$N_i(\bar{\varepsilon}_{2_i}, \beta_{2_i}) := \min \left\{ N_i \in \mathbb{N} \mid \sum_{k=1}^{m_i} \sum_{j=0}^{c_i-1} \binom{N_i}{j} \varepsilon_{2_{i_k}}^j (1 - \varepsilon_{2_{i_k}})^{N_i-j} \leq \beta_{2_i} \right\}, \quad (5.1)$$

$\beta_{2_i} \in [0, 1]$, $\varepsilon_{2_{i_k}} = \left(\frac{\varepsilon_{1_i}}{\mathcal{L}_{g_{i_k}}}\right)^{n_i+p_i}$, $\varepsilon_{1_i} \in [0, 1] \leq \mathcal{L}_{g_{i_k}} = \max \{ \mathcal{L}_{g_{i_1}}, \mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g_{i_5}} \}$, $k \in \{1, \dots, m_i\}$, with n_i, p_i, c_i, m_i being, respectively, dimensions of state and interaction sets, the number of decision variables in SOP_ζ , and the cardinality of a finite set that $\kappa_i \in (0, 1)$ takes value from it. Then if $\eta_{\zeta_i}^* + \varepsilon_{1_i} \leq 0$, the solution Θ_i^* is a feasible solution for ROP (4.1), i.e., $\Theta^* \models ROP$, with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i}$.

Remark 5.2. Note that although the minimum number of data in (5.1) required for solving SOP_ζ in (4.4) is exponential with respect to the dimension of unknown agents, the proposed compositional approach here significantly mitigates the computational complexity given that SOP_ζ should be solved for each agent instead of multi-agent AVs. It may be worth mentioning that the main benefit of our techniques compared to system identification is that the proposed data-driven approach here is capable of constructing SBC for any type of nonlinear systems which are Lipschitz continuous, whereas system identification approaches are mainly tailored to linear or some particular classes of nonlinear systems. In addition, even if one is able to find a model using

system identification techniques, one still needs to search for a barrier certificate. In this case, one suffers from the computational complexity in both identifying the model as well as searching for SBC based on it.

We summarize the results of Theorem 5.1 in Algorithm 1 to describe the required procedure.

Algorithm 1 Data-driven construction of SBC for unknown agents \mathcal{A}_i

Require: $\beta_{1_i} \in (0, 1], \beta_{2_i} \in [0, 1], \mu_i, \mathcal{Q}_i, \mathcal{L}_{g_{i_k}} \in \mathbb{R}^+$, and degree of SBC

- 1: Choose $\varepsilon_{1_i} \in [0, 1]$ such that $\varepsilon_{1_i} \leq \mathcal{L}_{g_{i_k}}$
- 2: Compute \hat{N}_i required for the empirical approximation in (4.5) according to Lemma 4.3
- 3: Compute the minimum number of samples N_i according to (5.1)
- 4: Solve the SOP_ζ in (4.4) with acquired \hat{N}_i and N_i , and obtain $\eta_{\zeta_i}^*$ and Θ_i^*

Ensure: if $\eta_{\zeta_i}^* + \varepsilon_{1_i} \leq 0$, then Θ_i^* is a feasible solution for ROP with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i}$

In order to compute the required number of samples in Theorem 5.1, one needs to first compute $\mathcal{L}_{g_{i_k}}$. In the Appendix, we propose a systematic approach to compute $\mathcal{L}_{g_{i_k}}$ for both linear and nonlinear agents.

Remark 5.3. Note that the Lipschitz constant of dynamics and an upper bound on unknown dynamics are the minimal information we need from the system in our data-driven setting. However, one can utilize the proposed approach in [35] to estimate the Lipschitz constant of dynamics via sampled data. As for an upper bound on unknown dynamics, it can be computed based on the range of the state set.

Case Study: Vehicle Platooning (continued). We assume the model of each agent is unknown. The main goal is to compositionally construct a BC for the multi-agent AV based on SBCs of individual agents via data collected from trajectories of agents and solving SCP_ζ (4.4). Accordingly, we formally estimate the collision risk for the multi-agent AV within a finite time horizon with some desirable confidence.

We first fix the structure of our sub-barrier certificates as $\mathcal{B}_i(q_i, x_i) = q_{i_1}d_i^2 + q_{i_2}d_i^4 + q_{i_3}d_i\nu_i + q_{i_4}\nu_i^4 + q_{i_5}\nu_i^2$, for all $i \in \{1, \dots, 100\}$. According to Algorithm 1, we fix the threshold $\varepsilon_{1_i} = 0.08$ and the confidence $\beta_{2_i} = 10^{-4}$, a-priori. In order to reduce the number of decision variables, and accordingly, reduce the number of data in (5.1) required for solving the SOP_ζ (4.4), we a-priori fix $\lambda_i = 10, \psi_i = 10^{-4}, \alpha_i = 10^{-4}, \rho_i = 9 \times 10^{-7}$, for all $i \in \{1, \dots, 100\}$. Now we need to compute \mathcal{L}_g which is required for computing the minimum number of data. We construct matrix P_i based on coefficients of the SBC as

$$P_i = \begin{bmatrix} q_{i_1} & 0 & \frac{q_{i_3}}{2} & 0 \\ 0 & q_{i_2} & 0 & 0 \\ \frac{q_{i_3}}{2} & 0 & q_{i_5} & 0 \\ 0 & 0 & 0 & q_{i_4} \end{bmatrix}.$$

We enforce $-0.001 \leq q_{i_1}, q_{i_2}, q_{i_3}, q_{i_5} \leq 0.001$, $-0.14 \leq q_{i_4} \leq 0.14$ as discussed in Remark 10.2. We assume that $\kappa_i \in \{0.9, 0.99\}$ with the cardinality $m_i = 2$. Then according to Lemma 10.1, we compute $\mathcal{L}_{g_{i_k}} = 1.7804$, $k \in \{1, \dots, m_i\}$, and accordingly, $\varepsilon_{2_{i_k}} = (\frac{\varepsilon_{1_i}}{\mathcal{L}_{g_{i_k}}})^{n_i+p_i} = (\frac{0.08}{1.7804})^3 = 9.0723 \times 10^{-5}$.

Now we have all the required ingredients to compute N_i . The minimum number of data required for solving SOP_ζ in (4.4) is computed as $N_i = 244993$. Now we need to compute \hat{N}_i which is required for solving the SOP_ζ (4.4) (*i.e.*, condition \bar{g}_{i_5}). According to Lemma 4.3, we fix $\mu_i = 0.08$ with a-priori confidence $\beta_{1_i} = 10^{-4}$ and compute $\hat{N}_i = 11$. We refer the interested reader to [29] for more details on the quantification of \hat{N}_i . By leveraging the computed parameters, the SOP_ζ in (4.4) is solved with $\kappa_i = 0.99$ and the following decision variables:

$$\begin{aligned} \mathcal{B}_i(q_i, x_i) &= -0.0008d_i^2 + 0.001d_i^4 + 0.0001d_i\nu_i + 0.14\nu_i^4 - 0.0006\nu_i^2, \\ \eta_{\zeta_i}^* &= -0.085, \quad \gamma_i^* = 0.1. \end{aligned} \tag{5.2}$$

Since $\eta_{\zeta_i}^* + \varepsilon_{1_i} = -0.005 \leq 0$, according to Theorem 5.1, one can guarantee that the constructed SBC via collected data together with other decision variables in (5.2) are valid for the original ROP (4.1) with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i} = 1 - 10^{-4} - 10^{-4}$. Satisfaction of conditions (3.5)-(3.7) via constructed SBC from data is illustrated in Fig. 3.

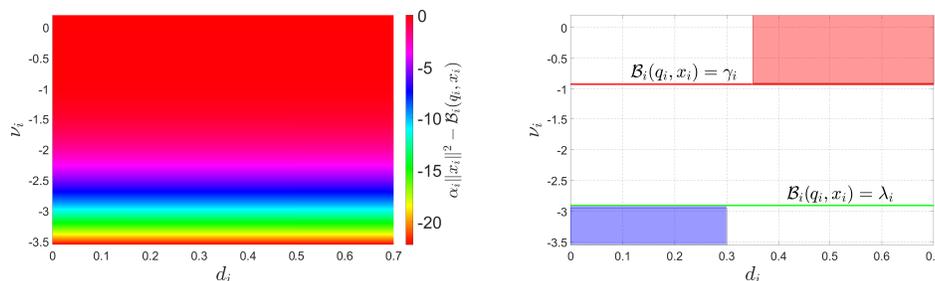


FIGURE 3. Left: Satisfaction of condition (3.5). As observed, this condition is negative for all ranges of $d_i \in [0, 0.7]$ and $\nu_i \in [-3.55, 0.2]$. Right: Satisfaction of conditions (3.6)-(3.7) based on SBC of each unknown vehicle. Pink and purple boxes are initial and collision sets, respectively.

Remark 5.4. *Note that the sample space of \hat{w}_i is defined with respect to the interconnection topology according to (2.4). In particular, since each vehicle is only connected to its proceeding vehicle in a cascade interconnection topology, the sample of \hat{w}_i for each agent contains only the state of the proceeding vehicle.*

In the next section, we consider the multi-agent AV \mathcal{A} as in Definition 2.2 and provide a compositional framework for the construction of BC for \mathcal{A} using SBC of \mathcal{A}_i .

6. COMPOSITIONALITY RESULTS FOR MULTI-AGENT AVS

In this section, we analyze multi-agent AV $\mathcal{A} = \mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$ by driving a small-gain type compositional condition and discussing how to construct a BC for the multi-agent AV based on SBC of its individual agents. The construed BC is useful to estimate the collision risk for multi-agent AVs according to Theorem 3.2. Before presenting the main compositionality result of the work, we define $\Lambda := \text{diag}(\hat{\lambda}_1, \dots, \hat{\lambda}_M)$ with $\hat{\lambda}_i = 1 - \kappa_i$, and $\Delta := \{\hat{\delta}_{ij}\}$ with $\hat{\delta}_{ij} = \frac{\rho_i}{\alpha_j}$, where $\hat{\delta}_{ii} = 0, \forall i \in \{1, \dots, M\}$.

In the next theorem, we show that how one can construct a BC for the multi-agent AV \mathcal{A} using SBC of \mathcal{A}_i .

Theorem 6.1. *Consider the multi-agent AV $\mathcal{A} = \mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$ induced by $M \in \mathbb{N}_{\geq 1}$ agents \mathcal{A}_i . Suppose that each \mathcal{A}_i admits an SBC \mathcal{B}_i with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i}$, as proposed in Theorem 5.1. If*

$$\sum_{i=1}^M \lambda_i > \sum_{i=1}^M \gamma_i, \quad (6.1)$$

$$\mathbf{1}_M^\top(-\Lambda + \Delta) =: [\pi_1; \dots; \pi_M]^\top < 0, \quad \text{equivalently, } \pi_i < 0, \quad \forall i \in \{1, \dots, M\}, \quad (6.2)$$

then

$$\mathcal{B}(q, x) := \sum_{i=1}^M \mathcal{B}_i(q_i, x_i)$$

is a BC for the multi-agent AV \mathcal{A} with a confidence of at least $1 - \sum_{i=1}^M \beta_{1_i} - \sum_{i=1}^M \beta_{2_i}$, and with

$$\gamma := \sum_{i=1}^M \gamma_i, \quad \lambda := \sum_{i=1}^M \lambda_i, \quad \psi := \sum_{i=1}^M \psi_i,$$

$$\kappa := 1 + \pi, \quad \text{with } \max_{1 \leq i \leq M} \pi_i < \pi < 0, \quad \text{and } \pi \in (-1, 0).$$

Remark 6.2. *Note that $\hat{\lambda}_i$ and $\hat{\delta}_{ij}$ are used to capture, respectively, the gain of each individual agent and its interaction gain with other agents in the interconnection topology, i.e., κ_i, ρ_i . Those $\hat{\lambda}_i$ and $\hat{\delta}_{ij}$ are then utilized for the construction of Λ and Δ , and accordingly, establishing the compositionality condition in (6.2).*

Remark 6.3. *If one is interested in enforcing the compositionality conditions during solving SOP_ζ in (4.4), enforcing $\mathbf{1}_M^\top(-\Lambda + \Delta) < 0$ is not directly possible due to having a bilinearity between decision variables ρ_i and α_j . As a potential solution, one can a-priori fix either ρ_i or α_j to resolve the bilinearity $\frac{\rho_i}{\alpha_j}$ and then enforce compositionality conditions (6.1)-(6.2) as two additional conditions while solving SOP_ζ in (4.4).*

Case Study: Vehicle Platooning (continued). We now proceed with Theorem 6.1 to construct a BC for the multi-agent AV with a level of confidence using SBCs of individual agents constructed from data. By constructing $\Lambda := \text{diag}(\hat{\lambda}_1, \dots, \hat{\lambda}_M)$ with $\hat{\lambda}_i = 0.01$, and $\Delta := \{\hat{\delta}_{ij}\}$ with $\hat{\delta}_{ij} = \frac{\rho_i}{\alpha_j} = 9 \times 10^{-3}$, one can readily verify that the compositionality condition $\mathbf{1}_M^\top(-\Lambda + \Delta) < 0$ is satisfied. Moreover, the compositionality condition (6.1) is also met since $\lambda_i > \gamma_i$, for all $i \in \{1, \dots, 100\}$. Then by employing the results of Theorem 6.1,

one can conclude that $\mathcal{B}(q, x) = \sum_{i=1}^{100} (-0.0008d_i^2 + 0.001d_i^4 + 0.0001d_i\nu_i + 0.14\nu_i^4 - 0.0006\nu_i^2)$ is a BC for the multi-agent AV with $\gamma = 10, \lambda = 1000, \kappa = 0.99$ and $\psi = 0.01$, with a confidence of at least $1 - \sum_{i=1}^{100} \beta_{1_i} - \sum_{i=1}^{100} \beta_{2_i} = 98\%$.

By employing Theorem 3.2, we guarantee that the collision risk for the multi-agent AV is at most 1% with a confidence of at least 98% during the time horizon $\mathcal{T} = 100$, *i.e.*,

$$\mathbb{P}^N \left\{ \mathbb{P} \{ \mathcal{A} \models_{100} \varphi \} \leq 0.01 \right\} \geq 0.98. \quad (6.3)$$

In order to verify our results, we assume that we have access to the model of agents and plot the closed-loop state (relative distance and velocity) trajectories of a representative vehicle with 10 different noise realizations as in Fig. 4. As it can be observed, none of 10 state trajectories violates the safety specification, which is in accordance with our collision risk guarantee in (6.3).

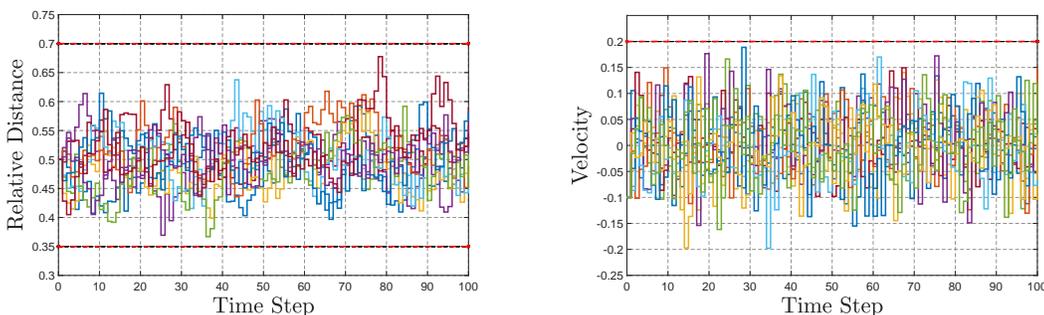


FIGURE 4. Closed-loop (relative distance and velocity) trajectories of a representative vehicle with 10 different noise realizations in a network of 100 vehicles.

The SBC computation for each vehicle takes 12 minutes on a Windows machine (Intel i7-8665U CPU with 32 GB of RAM).

In case the compositionality conditions (6.1)-(6.2) are not satisfied, we propose, in the next section, an alternative compositional approach that does not require any compositionality conditions but at the cost of providing a potentially conservative collision risk for the multi-agent AVs.

7. RELAXED COMPOSITIONAL APPROACH

In this section, we propose an alternative compositional approach which is relax compared to the small-gain reasoning in the sense that (i) condition (3.5) is no longer needed, (ii) compositionality conditions (6.1)-(6.2) are no more required, (iii) κ_i in condition (3.8) is equal to one, and (iv) the required number of data in Theorem 5.1 is reduced since $m_i = 1$. On the downside, the provided collision risk for the multi-agent AV is

potentially conservative. In our proposed alternative setting, we omit g_{i_2} and modify some other conditions of ROP in (4.1) as

$$\begin{aligned} g_{i_5} &= \mathbb{E}\left[\mathcal{B}_i(q_i, f_i(x_i, w_i, \varsigma_i)) \mid x_i, w_i\right] - \mathcal{B}_i(q_i, x_i) - \rho_i \|w_i\|^2 - \psi_i, \\ g_{i_6} &= \gamma_i - \lambda_i - \varrho_i, \end{aligned} \quad (7.1)$$

for some $\varrho_i < 0$. We now compute the collision risk for *each individual agent* \mathcal{A}_i via the following theorem.

Theorem 7.1. *Consider an agent \mathcal{A}_i defined in Definition 2.1 and a finite time horizon $\mathcal{T} \in \mathbb{N}$. Suppose that there exists a non-negative SBC \mathcal{B}_i satisfying conditions (3.6)-(3.8) with $\lambda_i > \gamma_i$. Then the collision risk for each agent \mathcal{A}_i is computed as*

$$\mathbb{P}\left\{\mathcal{A}_i \models_{\mathcal{T}} \varphi_i\right\} \leq \delta_i, \quad \text{with } \delta_i = \frac{\gamma_i + \hat{\psi}_i \mathcal{T}}{\lambda_i}, \quad (7.2)$$

where $\hat{\psi}_i = \rho_i \|w_i\|_{\infty}^2 + \psi_i$.

In comparison with the small-gain compositional approach, one needs here to solve SOP_{ς} in (4.4) without g_{i_2} and with g_{i_5}, g_{i_6} as in (7.1). Moreover, the interconnection of $\mathcal{A}_i, \forall i \in \{1, \dots, M\}$, is defined here by an interconnection map $h : \prod_{i=1}^M X_i \rightarrow \prod_{i=1}^M W_i$, and accordingly, the interconnection constraint in (2.4) can be generalized to $[w_1; \dots; w_M] = h(x_1, \dots, x_M)$. Similar to Theorem 5.1, one can relate the optimal value of SOP_{ς} to that of ROP in (4.1) with the new conditions in (7.1), and consequently, formally quantify collision risks of unknown agents \mathcal{A}_i based on the number of data as in (5.1) with $m_i = 1$, and a required level of confidence. We now propose the relaxed compositionality results of this section.

Theorem 7.2. *Consider the multi-agent AV $\mathcal{A} = (X, \varsigma, f)$ composed of M agents $\mathcal{A}_i = (X_i, W_i, \varsigma_i, f_i)$, with a collision event $\varphi = \varphi_1 \times \varphi_2 \times \dots \times \varphi_M$. Let the collision risk for each \mathcal{A}_i be at most δ_i (in the sense of Theorem 7.1) with a confidence of at least $1 - \beta_i$, with $\beta_i = \beta_{1_i} + \beta_{2_i}, \forall i \in \{1, \dots, M\}$, i.e.,*

$$\mathbb{P}\left\{\mathbb{P}\{\mathcal{A}_i \models \varphi_i\} \leq \delta_i\right\} \geq 1 - \beta_i.$$

Then the collision risk for the multi-agent AV \mathcal{A} is at most $\sum_{i=1}^M \delta_i$ with a confidence of at least $1 - \sum_{i=1}^M \beta_i$, i.e.,

$$\mathbb{P}\left\{\mathbb{P}\{\mathcal{A}_1 \models \varphi_1 \cup \dots \cup \mathcal{A}_M \models \varphi_M\} \leq \sum_{i=1}^M \delta_i\right\} \geq 1 - \sum_{i=1}^M \beta_i.$$

Remark 7.3. *As it can be observed, the confidence level for the both small-gain and relaxed compositional approaches is the same, i.e., $1 - \sum_{i=1}^M \beta_{1_i} - \sum_{i=1}^M \beta_{2_i}$. In the relaxed compositional approach, the collision risk for the multi-agent AV is computed based on the linear combination of estimated collision risks for individual agents, i.e., $\sum_{i=1}^M \delta_i$. In contrast, using the small-gain compositional approach, we first construct the overall*

BC based on SBC of agents and then estimate the collision risk of the multi-agent AV via results of Theorem 3.2. Accordingly, the estimated collision risk via the small-gain compositional approach is potentially less conservative but at the cost of satisfying some additional conditions.

In the next section, we present our data-driven approaches for *deterministic* multi-agents AVs without any stochasticity ς_i .

8. DETERMINISTIC (MULTI)AGENT AVS

In this section, we consider dynamics of each agent as a discrete-time *deterministic* system given by

$$\mathcal{A}_i: x_i(k+1) = f_i(x_i(k), w_i(k)), \quad k \in \mathbb{N}, \quad (8.1)$$

with $f_i: X_i \times W_i \rightarrow X_i$, and represent it with $\mathcal{A}_i = (X_i, W_i, f_i)$. The multi-agent AV \mathcal{A} without interactions w_i , constructed as a composition of several agents \mathcal{A}_i with interactions, can be represented by $\mathcal{A} = (X, f)$ with $f: X \rightarrow X$, and $\mathcal{A}: x(k+1) = f(x(k))$. We now define barrier certificates for *deterministic* multi-agent AVs as the next definition.

Definition 8.1. *Given the deterministic multi-agent AV $\mathcal{A} = (X, f)$ with initial and collision sets $X_0, X_c \subseteq X$, a function $\mathcal{B}: X \rightarrow \mathbb{R}$ is called a barrier certificate (BC) for \mathcal{A} if there exist $\gamma, \lambda \in \mathbb{R}$, with $\lambda > \gamma$, and $0 < \kappa < 1$, such that conditions (3.1)-(3.2) are satisfied, and*

$$\mathcal{B}(f(x)) \leq \kappa \mathcal{B}(x), \quad \forall x \in X. \quad (8.2)$$

Now we employ Definition 8.1 and quantify the collision risk for multi-agent AVs via the next theorem.

Theorem 8.2. *Consider a deterministic multi-agent AV $\mathcal{A} = (X, f)$. Suppose \mathcal{B} is a BC for \mathcal{A} as in Definition 8.1. Then the collision risk is zero for the multi-agent AV within an infinite time horizon, i.e., $x_{x_0}(k) \cap X_c = \emptyset$ for any $x_0 \in X_0$ and any $k \in \mathbb{N}$.*

Since searching for the BC as in Definition 8.1 is computationally expensive, we now define sub-barrier certificates for deterministic agents \mathcal{A}_i as the following definition.

Definition 8.3. *Consider a deterministic agent $\mathcal{A}_i = (X_i, W_i, f_i)$, and $X_{0_i}, X_{c_i} \subseteq X_i$ as its initial and collision sets, respectively. A function $\mathcal{B}_i: X_i \rightarrow \mathbb{R}$ is called a sub-barrier certificate (SBC) for \mathcal{A}_i if there exist $\gamma_i, \lambda_i \in \mathbb{R}$, $\alpha_i, \rho_i \in \mathbb{R}_0^+$, and $0 < \kappa_i < 1$, such that conditions (3.5)-(3.7) are satisfied, and $\forall x_i \in X_i, \forall w_i \in W_i$,*

$$\mathcal{B}_i(f_i(x_i, w_i)) \leq \kappa_i \mathcal{B}_i(x_i) + \rho_i \|w_i\|^2. \quad (8.3)$$

Here, we assume that the transition map f_i in (8.1) is unknown. We similarly recast the conditions of SBC as the proposed ROP in (4.1), but without g_{i_1} , and with

$$g_{i_5} = \mathcal{B}_i(q_i, f_i(x_i, w_i)) - \kappa_i \mathcal{B}_i(q_i, x_i) - \rho_i \|w_i\|^2. \quad (8.4)$$

Since the proposed ROP in (4.1) has infinitely many constraints and a precise transition map f_i is also needed for solving the problem, we employ the proposed SOP_N in (4.3) instead of solving the ROP in (4.1). Note that we do not need to employ SOP_ζ in (4.4) since there is no stochasticity inside the model. Similar to Theorem 5.1, we propose the next theorem to relate the optimal value of SOP_N in (4.3) to that of ROP in (4.1), and accordingly, formally quantify the SBC of unknown agents \mathcal{A}_i based on the number of data and a required level of confidence.

Theorem 8.4. *Consider the unknown deterministic agent \mathcal{A}_i as in (8.1), and initial and collision regions X_{0_i} and X_{c_i} , respectively. Let g_{i_2} - g_{i_4} be Lipschitz continuous with respect to x_i , and g_{i_5} as in (8.4) be Lipschitz continuous with respect to x_i, w_i , with Lipschitz constants $\mathcal{L}_{g_{i_2}}$ - $\mathcal{L}_{g_{i_4}}$, $\mathcal{L}_{g_{i_5k}}$, respectively. Consider the corresponding SOP_N in (4.3) with its associated optimal value $\eta_{N_i}^*$ and solution $\Theta_i^* = [\gamma_i^*; \lambda_i^*; \alpha_i^*; \rho_i^*; q_{i_1}^*; \dots; q_{i_r}^*]$, with $N_i \geq N_i(\bar{\varepsilon}_{2_i}, \beta_{2_i})$, as in (5.1) with $\varepsilon_{1_i}, \beta_{2_i} \in [0, 1]$ where $\varepsilon_{1_i} \leq \mathcal{L}_{g_{i_k}} = \max\{\mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g_{i_5k}}\}$. If $\eta_{N_i}^* + \varepsilon_{1_i} \leq 0$, then the solution Θ_i^* is a feasible solution for ROP in (4.1) with a confidence of at least $1 - \beta_{2_i}$.*

Proof of Theorem 8.4 is similar to that of Theorem 5.1 and is omitted here.

8.1. Small-Gain Compositional Approach. Given a deterministic multi-agent AV $\mathcal{A} = \mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$, we show in the next theorem that how to construct a BC for the multi-agent AV \mathcal{A} using SBCs of \mathcal{A}_i .

Theorem 8.5. *Consider the deterministic multi-agent AV $\mathcal{A} = \mathcal{I}(\mathcal{A}_1, \dots, \mathcal{A}_M)$ induced by $M \in \mathbb{N}_{\geq 1}$ agents \mathcal{A}_i as in (8.1). Suppose that each \mathcal{A}_i admits an SBC \mathcal{B}_i with a confidence of at least $1 - \beta_{2_i}$, as proposed in Theorem 8.4. If the compositional conditions (6.1)-(6.2) are satisfied, then*

$$\mathcal{B}(q, x) := \sum_{i=1}^M \mathcal{B}_i(q_i, x_i)$$

is a BC for the multi-agent AV \mathcal{A} with a confidence of at least $1 - \sum_{i=1}^M \beta_{2_i}$, and with

$$\gamma := \sum_{i=1}^M \gamma_i, \quad \lambda := \sum_{i=1}^M \lambda_i, \quad \kappa := 1 + \pi, \quad \text{with } \max_{1 \leq i \leq M} \pi_i < \pi < 0, \quad \text{and } \pi \in (-1, 0).$$

Proof of Theorem 8.5 is similar to that of Theorem 6.1 and is omitted here.

8.2. Relaxed Compositional Approach. In the case that the compositionality conditions are not satisfied, we propose a relax compositional approach, in which (i) condition (3.5) is no longer needed, (ii) compositionality conditions (6.1)-(6.2) are no more required, (iii) κ_i in condition (8.3) is equal to one, and (iv) the required number of data in Theorem 8.4 is reduced, but at the cost of providing the collision risk estimation for multi-agent AVs in *finite time horizons*. To do so, we first propose a new definition of SBC for deterministic agents \mathcal{A}_i as the following.

Definition 8.6. Consider the deterministic agent $\mathcal{A}_i = (X_i, W_i, f_i)$, and $X_{0_i}, X_{c_i} \subseteq X_i$ as its initial and collision sets, respectively. A function $\mathcal{B}_i: X_i \rightarrow \mathbb{R}$ is called a sub-barrier certificate (SBC) for \mathcal{A}_i if there exist $\rho_i \in \mathbb{R}_0^+$, $\gamma_i, \lambda_i \in \mathbb{R}$ with $\gamma_i + \rho_i \|w_i\|_\infty^2 \mathcal{T}_i < \lambda_i$, within a finite time horizon $\mathcal{T}_i \in \mathbb{N}$, such that conditions (3.6)-(3.7) are satisfied, and $\forall x_i \in X_i, \forall w_i \in W_i$,

$$\mathcal{B}_i(f_i(x_i, w_i)) \leq \mathcal{B}_i(x_i) + \rho_i \|w_i\|^2. \quad (8.5)$$

We now employ Definition 8.6 and estimate the collision risk for each agent \mathcal{A}_i in a *finite time horizon* via the next theorem.

Theorem 8.7. Consider the deterministic agent \mathcal{A}_i in (8.1) and a finite time horizon $\mathcal{T}_i \in \mathbb{N}$. Suppose \mathcal{B}_i is an SBC for \mathcal{A}_i as in Definition 8.6. Then, the collision risk is zero for each agent \mathcal{A}_i within the finite time horizon $\mathcal{T}_i = \frac{\lambda_i - \gamma_i}{\rho_i \|w_i\|_\infty^2}$, i.e., $x_{x_{0_i}}(k) \cap X_{c_i} = \emptyset$ for any $x_{0_i} \in X_{0_i}$ and any $k \in [0, \mathcal{T}_i)$, with $\mathcal{T}_i = \frac{\lambda_i - \gamma_i}{\rho_i \|w_i\|_\infty^2}$.

We similarly recast the conditions of SBC as the proposed ROP in (4.1), but without g_{i_1}, g_{i_2} , and with

$$\begin{aligned} g_{i_5}(x_i, \Theta_i) &= \mathcal{B}_i(q_i, f_i(x_i, w_i)) - \mathcal{B}_i(q_i, x_i) - \rho_i \|w_i\|^2, \\ g_{i_6}(x_i, \Theta_i) &= \gamma_i + \rho_i \|w_i\|_\infty^2 \mathcal{T} - \lambda_i - \varrho_i, \end{aligned}$$

for some $\varrho_i < 0$. Similar to Theorem 8.4, one can relate the optimal value of SOP_N in (4.3) to that of ROP in (4.1), and accordingly, quantify the SBC of unknown agents \mathcal{A}_i based on the number of data as in (5.1) with $m_i = 1$, and a required level of confidence. We now propose our relaxed compositional approach for multi-agent AVs \mathcal{A} with unknown *deterministic* dynamics via the next theorem.

Theorem 8.8. Consider the deterministic multi-agent AV $\mathcal{A} = (X, f)$ composed of M agents $\mathcal{A}_i = (X_i, W_i, f_i)$, $i \in \{1, \dots, M\}$, with a collision event $\varphi = \varphi_1 \times \varphi_2 \times \dots \times \varphi_M$. Let the collision risk for each \mathcal{A}_i be zero (in the sense of Theorem 8.7) for a finite time horizon $\mathcal{T}_i = \frac{\lambda_i - \gamma_i}{\rho_i \|w_i\|_\infty^2}$ with a confidence of at least $1 - \beta_{2_i}$, $\forall i \in \{1, \dots, M\}$, i.e., $\mathbb{P}\{\mathcal{A}_i \not\Leftarrow \varphi_i\} \geq 1 - \beta_{2_i}$. Then the collision risk for the multi-agent AV \mathcal{A} is zero within the finite time horizon $\mathcal{T} = \min_{i \in \{1, \dots, M\}} \{\mathcal{T}_i\}$, with a confidence of at least $1 - \sum_{i=1}^M \beta_{2_i}$, i.e.,

$$\mathbb{P}\{\mathcal{A}_1 \not\Leftarrow \varphi_1 \cap \dots \cap \mathcal{A}_M \not\Leftarrow \varphi_M\} \geq 1 - \sum_{i=1}^M \beta_{2_i}.$$

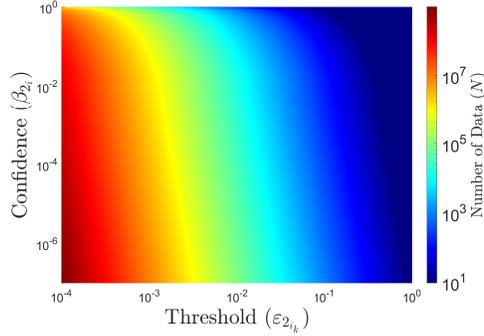


FIGURE 5. Required number of data, represented by ‘colour bar’, in terms of the threshold $\varepsilon_{2_{i_k}}$ and the confidence β_{2_i} . Plot is in the logarithmic scale. The required number of data decreases by increasing either the threshold $\varepsilon_{2_{i_k}}$ or the confidence β_{2_i} .

Proof of Theorem 8.8 is similar to that of Theorem 7.2 and is omitted here.

The confidence level for multi-agent AVs with unknown *deterministic* dynamics in the both small-gain and relaxed compositional approaches is the same, *i.e.*, $1 - \sum_{i=1}^M \beta_{2_i}$. However, the collision risk in the relaxed compositional approach is estimated in *finite time* horizons, whereas small-gain compositional approach provides the collision risk estimation in *infinite time* horizons but at the cost of fulfilling some additional conditions.

Case Study: Vehicle Platooning (computational complexity analysis). In order to provide a more practical analysis on the computational complexity based on number of collected data required for solving the SOP_ζ in (4.4), we plot in Fig. 5 the required number of data in terms of the threshold $\varepsilon_{2_{i_k}}$ and the confidence parameter β_{2_i} according to (5.1) for each vehicle. As it can be observed, the required number of data decreases by increasing either the threshold $\varepsilon_{2_{i_k}}$ or β_{2_i} .

9. DISCUSSION

In this work, we proposed a compositional data-driven scheme for the formal estimation of collision risks for stochastic multi-agent AVs while providing an a-priori guaranteed confidence on our estimation. We first reformulated the original collision risk problem as a robust optimization program (ROP), and then provided a scenario optimization program (SOP) corresponding to the original ROP by collecting finite numbers of data from trajectories of each agent. We then built a probabilistic relation between the optimal value of SOP and that of ROP, and accordingly, constructed a sub-barrier certificate for each unknown agent based on the number of data and a required level of confidence. By leveraging a compositional technique based on small-gain reasoning, we quantified the collision risk for the multi-agent AVs with some level of confidence based on constructed sub-barrier certificates of individual agents. In the case that the compositionality condition is

not satisfied, we proposed a relaxed-version of compositional results without requiring any compositionality conditions. We finally presented our techniques for *non-stochastic* multi-agent AVs. We demonstrated the effectiveness of our proposed results by applying them to a vehicle platooning in a network of 100 vehicles.

REFERENCES

- [1] Z. Hou and Z. Wang, “From model-based control to data-driven control: Survey, classification and perspective,” *Information Sciences*, vol. 235, pp. 3–35, 2013.
- [2] A. P. Chouhan and G. Banda, “Formal verification of heuristic autonomous intersection management using statistical model checking,” *Sensors*, vol. 20, no. 16, p. 4506, 2020.
- [3] A. Paigwar, E. Baranov, A. Renzaglia, C. Laugier, and A. Legay, “Probabilistic collision risk estimation for autonomous driving: Validation via statistical model checking,” in *2020 IEEE Intelligent Vehicles Symposium (IV)*, 2020, pp. 737–743.
- [4] M. Barbier, A. Renzaglia, J. Quilbeuf, L. Rummelhard, A. Paigwar, C. Laugier, A. Legay, J. Ibañez-Guzmán, and O. Simonin, “Validation of perception and decision-making systems for autonomous driving via statistical model checking,” in *2019 IEEE Intelligent Vehicles Symposium (IV)*, 2019, pp. 252–259.
- [5] D. An, J. Liu, M. Zhang, X. Chen, M. Chen, and H. Sun, “Uncertainty modeling and runtime verification for autonomous vehicles driving control: A machine learning-based approach,” *Journal of Systems and Software*, vol. 167, 2020.
- [6] B. Barbot, B. Bérard, Y. Duploux, and S. Haddad, “Statistical model-checking for autonomous vehicle safety validation,” in *Conference SIA Simulation Numérique*, 2017.
- [7] S. Prajna and A. Jadbabaie, “Safety verification of hybrid systems using barrier certificates,” in *Proceedings of the International Conference on Hybrid Systems: Computation and Control (HSCC)*, 2004, pp. 477–492.
- [8] S. Prajna, A. Jadbabaie, and G. J. Pappas, “A framework for worst-case and stochastic safety verification using barrier certificates,” *TAC*, vol. 52, no. 8, pp. 1415–1428, 2007.
- [9] U. Borrmann, L. Wang, A. D. Ames, and M. Egerstedt, “Control barrier certificates for safe swarm behavior,” *IFAC-PapersOnLine*, vol. 48, no. 27, pp. 68–73, 2015.
- [10] L. Wang, A. D. Ames, and M. Egerstedt, “Safety barrier certificates for collisions-free multirobot systems,” *IEEE Transactions on Robotics*, vol. 33, no. 3, pp. 661–674, 2017.
- [11] A. D. Ames, S. Coogan, M. Egerstedt, G. Notomista, K. Sreenath, and P. Tabuada, “Control barrier functions: Theory and applications,” in *Proceedings of the 18th European Control Conference (ECC)*, 2019, pp. 3420–3431.
- [12] B. T. Lopez, J. E. Slotine, and J. P. How, “Robust adaptive control barrier functions: An adaptive and data-driven approach to safety,” *IEEE Control Systems Letters*, vol. 5, no. 3, pp. 1031–1036, 2020.
- [13] C. Folkestad, Y. Chen, A. D. Ames, and J. W. Burdick, “Data-driven safety-critical control: synthesizing control barrier functions with koopman operators,” *IEEE Control Systems Letters*, vol. 5, no. 6, pp. 2012–2017, 2020.
- [14] A. Robey, L. Lindemann, S. Tu, and N. Matni, “Learning robust hybrid control barrier functions for uncertain systems,” *IFAC-PapersOnLine*, vol. 54, no. 5, pp. 1–6, 2021.
- [15] C. K. Verginis, F. Djemou, and U. Topcu, “Safety-constrained learning and control using scarce data and reciprocal barriers,” *arXiv:2105.06526*, 2021.
- [16] Z. Zhang, L. and She, S. Ratschan, H. Hermanns, and E. M. Hahn, “Safety verification for probabilistic hybrid systems,” in *CAV*, 2010, pp. 196–211.
- [17] Z. Yang, M. Wu, and W. Lin, “An efficient framework for barrier certificate generation of uncertain nonlinear hybrid systems,” *NAHS*, vol. 36, 2020.

- [18] M. Ahmadi, B. Wu, H. Lin, and U. Topcu, "Privacy verification in POMDPs via barrier certificates," in *Proceedings of the 57th IEEE Conference on Decision and Control (CDC)*, 2018, pp. 5610–5615.
- [19] M. Ahmadi, A. Singletary, J. W. Burdick, and A. D. Ames, "Safe policy synthesis in multi-agent POMDPs via discrete-time barrier functions," in *Proceedings of the 58th Conference on Decision and Control (CDC)*, 2019, pp. 4797–4803.
- [20] C. Santoyo, M. Dutreix, and S. Coogan, "Verification and control for finite-time safety of stochastic systems via barrier functions," in *Proceedings of the IEEE Conference on Control Technology and Applications*, 2019, pp. 712–717.
- [21] A. Clark, "Control barrier functions for complete and incomplete information stochastic systems," in *Proceedings of the American Control Conference (ACC)*, 2019, pp. 2928–2935.
- [22] P. Jagtap, S. Soudjani, and M. Zamani, "Formal synthesis of stochastic systems via control barrier certificates," *IEEE Transactions on Automatic Control*, vol. 66, no. 7, pp. 3097–3110, 2020.
- [23] M. Anand, A. Lavaei, and M. Zamani, "From small-gain theory to compositional construction of barrier certificates for large-scale stochastic systems," *IEEE Transactions on Automatic Control*, 2022.
- [24] A. Nejati, S. Soudjani, and M. Zamani, "Compositional construction of control barrier functions for continuous-time stochastic hybrid systems," *Automatica*, 2022.
- [25] —, "Compositional construction of control barrier certificates for large-scale stochastic switched systems," *IEEE Control Systems Letters*, vol. 4, no. 4, pp. 845–850, 2020.
- [26] N. Jahanshahi, A. Lavaei, and M. Zamani, "Compositional construction of safety controllers for networks of continuous-space POMDPs," *IEEE Transactions on Control of Network Systems*, 2022.
- [27] A. Lavaei, S. Soudjani, and E. Frazzoli, "Safety barrier certificates for stochastic hybrid systems," in *Proceedings of the Annual American Control Conference*, 2022.
- [28] A. Lavaei, S. Soudjani, A. Abate, and M. Zamani, "Automated verification and synthesis of stochastic hybrid systems: A survey," *Automatica*, 2022.
- [29] A. Salamati, A. Lavaei, S. Soudjani, and M. Zamani, "Data-driven safety verification of stochastic systems via barrier certificates," *Proceedings of the 7th IFAC Conference on Analysis and Design of Hybrid Systems (ADHS)*, vol. 54, no. 5, pp. 7–12, 2021.
- [30] S. Sadraddini, S. Sivaranjani, V. Gupta, and C. Belta, "Provably safe cruise control of vehicular platoons," *IEEE Control Systems Letters*, vol. 1, no. 2, pp. 262–267, 2017.
- [31] H. J. Kushner, *Stochastic Stability and Control*, ser. Mathematics in Science and Engineering. Elsevier Science, 1967.
- [32] M. Anand, A. Lavaei, and M. Zamani, "Compositional construction of control barrier certificates for large-scale interconnected stochastic systems," vol. 53, no. 2, pp. 1862–1867, 2020.
- [33] J. G. Saw, M. C. Yang, and T. C. Mo, "Chebyshev inequality with estimated mean and variance," *The American Statistician*, vol. 38, no. 2, pp. 130–132, 1984.
- [34] P. Mohajerin Esfahani, T. Sutter, and J. Lygeros, "Performance bounds for the scenario approach and an extension to a class of non-convex programs," *IEEE Transactions on Automatic Control*, vol. 60, no. 1, pp. 46–58, 2014.
- [35] G. Wood and B. Zhang, "Estimation of the Lipschitz constant of a function," *Journal of Global Optimization*, vol. 8, no. 1, pp. 91–103, 1996.

10. APPENDIX

10.1. Additional Lemmas.

Lemma 10.1. Consider a linear agent $\mathcal{A}_i: x_i(k+1) = A_i x_i(k) + D_i w_i(k) + R_i \varsigma_i(k)$, with $A_i, R_i \in \mathbb{R}^{n_i \times n_i}$, $D_i \in \mathbb{R}^{p_i \times n_i}$, and $\varsigma_i(\cdot) \sim \mathcal{N}(0, \mathbb{I}_n)$. Let $\|A_i\| \leq \mathcal{L}_{A_i}$, $\|D_i\| \leq \mathcal{L}_{D_i}$, where $\mathcal{L}_{A_i}, \mathcal{L}_{D_i} \in \mathbb{R}_0^+$. Then $\mathcal{L}_{g_{i_k}}$ for a quadratic SBC in the form of $x_i^\top P_i x_i$, with a positive-definite matrix $P_i \in \mathbb{R}^{n_i \times n_i}$, is computed as

$$\mathcal{L}_{g_{i_k}} = \max \left\{ \mathcal{L}_{g_{i_1}}, \mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g_{i_5_k}} \right\} = \max \left\{ 2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i}), (\mathcal{L}_{g_{i_5_{kx}}}^2 + \mathcal{L}_{g_{i_5_w}}^2)^{\frac{1}{2}} \right\},$$

with

$$\begin{aligned} \mathcal{L}_{g_{i_5_{kx}}} &= 2\lambda_{\max}(P_i)(s_i(\mathcal{L}_{A_i}^2 + \kappa_i) + s'_i \mathcal{L}_{A_i} \mathcal{L}_{D_i}), \\ \mathcal{L}_{g_{i_5_w}} &= 2\lambda_{\max}(P_i)(s'_i \mathcal{L}_{D_i}^2 + s_i \mathcal{L}_{A_i} \mathcal{L}_{D_i}) + 2\mathcal{L}_{\rho_i} s'_i, \end{aligned}$$

where $\mathcal{L}_{\alpha_i}, \mathcal{L}_{\rho_i}, s_i, s'_i$, are, respectively, upper bounds on α_i, ρ_i , and the norm of x_i, w_i , i.e., $\alpha_i \leq \mathcal{L}_{\alpha_i} \in \mathbb{R}_0^+$, $\rho_i \leq \mathcal{L}_{\rho_i} \in \mathbb{R}_0^+$, $\|x_i\| \leq s_i \in \mathbb{R}_0^+$, $\forall x_i \in X_i$, and $\|w_i\| \leq s'_i \in \mathbb{R}_0^+$, $\forall w_i \in W_i$.

Remark 10.2. One needs to know upper bounds for $\lambda_{\max}(P_i), \mathcal{L}_{\alpha_i}, \mathcal{L}_{\rho_i}$ in order to compute $\mathcal{L}_{g_{i_k}}$, and accordingly, the required number of data as Step 3 in Algorithm 1. The pre-assumed upper bounds should be then enforced as some additional conditions during solving the SOP_ζ (4.4) as mentioned in Step 4 of Algorithm 1.

Similarly, we provide another lemma for the computation of $\mathcal{L}_{g_{i_k}}$ but for *nonlinear* agents \mathcal{A}_i .

Lemma 10.3. Consider nonlinear agents $\mathcal{A}_i: x_i(k+1) = f_i(x_i(k), w_i(k)) + R_i \varsigma_i(k)$ with $\varsigma_i(\cdot) \sim \mathcal{N}(0, \mathbb{I}_n)$. Let $\|f_i(x_i, w_i)\| \leq \mathcal{L}_i$, $\|\partial_{x_i} f_i(x_i, w_i)\| = \left\| \frac{\partial f_i(x_i, w_i)}{\partial x_i} \right\| \leq \mathcal{L}_{x_i}$, $\|\partial_{w_i} f_i(x_i, w_i)\| = \left\| \frac{\partial f_i(x_i, w_i)}{\partial w_i} \right\| \leq \mathcal{L}_{w_i}$, where $\mathcal{L}_i, \mathcal{L}_{x_i}, \mathcal{L}_{w_i} \in \mathbb{R}_0^+$. Then $\mathcal{L}_{g_{i_k}}$ for a quadratic SBC in the form of $x_i^\top P_i x_i$ with a positive-definite matrix $P_i \in \mathbb{R}^{n_i \times n_i}$, is computed as

$$\mathcal{L}_{g_{i_k}} = \max \left\{ \mathcal{L}_{g_{i_1}}, \mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g_{i_5_k}} \right\} = \max \left\{ 2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i}), (\mathcal{L}_{g_{i_5_{kx}}}^2 + \mathcal{L}_{g_{i_5_w}}^2)^{\frac{1}{2}} \right\},$$

with

$$\begin{aligned} \mathcal{L}_{g_{i_5_{kx}}} &= 2\lambda_{\max}(P_i)(\mathcal{L}_i \mathcal{L}_{x_i} + \kappa_i s_i), \\ \mathcal{L}_{g_{i_5_w}} &= 2\lambda_{\max}(P_i)\mathcal{L}_i \mathcal{L}_{w_i} + 2\mathcal{L}_{\rho_i} s'_i, \end{aligned}$$

where $\mathcal{L}_{\alpha_i}, \mathcal{L}_{\rho_i}, s_i, s'_i$, are, respectively, upper bounds on α_i, ρ_i , and the norm of x_i, w_i , i.e., $\alpha_i \leq \mathcal{L}_{\alpha_i} \in \mathbb{R}_0^+$, $\rho_i \leq \mathcal{L}_{\rho_i} \in \mathbb{R}_0^+$, $\|x_i\| \leq s_i \in \mathbb{R}_0^+$, $\forall x_i \in X_i$, and $\|w_i\| \leq s'_i \in \mathbb{R}_0^+$, $\forall w_i \in W_i$.

10.2. Proofs of Statements.

Proof. (Theorem 5.1) Based on [34, Theorem 4.1, 4.3], the probabilistic distance between optimal values of ROP and SOP_N can be formally lower bounded by¹

$$\mathbb{P}^{N_i} \left\{ 0 \leq \eta_{R_i}^* - \eta_{N_i}^* \leq \varepsilon_{1_i} \right\} \geq 1 - \beta_{2_i},$$

provided that

$$N_i \geq N_i \left(g_{i_k} \left(\frac{\varepsilon_{1_i}}{\text{L}_{\text{SP}_i} \mathcal{L}^{g_{i_k}}} \right), \beta_{2_i} \right),$$

where $g_{i_k} : [0, 1] \rightarrow [0, 1]$ is given by

$$g_{i_k}(s) = s^{n_i + p_i}, \quad \forall s \in [0, 1],$$

and L_{SP_i} is a Slater constant as defined in [34, equation (5)]. Since the original ROP in (4.1) can be cast as a min-max optimization problem, the Slater constant L_{SP_i} can be selected as 1 [34, Remark 3.5].

One can readily conclude that $\eta_{N_i}^* \leq \eta_{R_i}^* \leq \eta_{N_i}^* + \varepsilon_{1_i}$ with a confidence of at least $1 - \beta_{2_i}$. From Lemma 4.3, we have $\eta_{N_i}^* \leq \eta_{\zeta_i}^*$ with a confidence of at least $1 - \beta_{1_i}$. Let us now define events $\mathcal{E}_1 := \{\eta_{N_i}^* \leq \eta_{\zeta_i}^*\}$ and $\mathcal{E}_2 := \{\eta_{R_i}^* \leq \eta_{N_i}^* + \varepsilon_{1_i}\}$, where $\mathbb{P}\{\mathcal{E}_1\} \geq 1 - \beta_{1_i}$ and $\mathbb{P}\{\mathcal{E}_2\} \geq 1 - \beta_{2_i}$. From the above derivations, one has $\eta_{R_i}^* \leq \eta_{N_i}^* + \varepsilon_{1_i} \leq \eta_{\zeta_i}^* + \varepsilon_{1_i}$. Since $\eta_{\zeta_i}^* + \varepsilon_{1_i} \leq 0$, it implies that $\eta_{R_i}^* \leq 0$. We are now computing the concurrent occurrence of events \mathcal{E}_1 and \mathcal{E}_2 , namely $\mathbb{P}\{\mathcal{E}_1 \cap \mathcal{E}_2\}$:

$$\mathbb{P}\{\mathcal{E}_1 \cap \mathcal{E}_2\} = 1 - \mathbb{P}\{\bar{\mathcal{E}}_1 \cup \bar{\mathcal{E}}_2\}, \quad (10.1)$$

where $\bar{\mathcal{E}}_1$ and $\bar{\mathcal{E}}_2$ are the complement of \mathcal{E}_1 and \mathcal{E}_2 , respectively. Since

$$\mathbb{P}\{\bar{\mathcal{E}}_1 \cup \bar{\mathcal{E}}_2\} \leq \mathbb{P}\{\bar{\mathcal{E}}_1\} + \mathbb{P}\{\bar{\mathcal{E}}_2\},$$

and by leveraging (10.1), one can readily conclude that

$$\mathbb{P}\{\mathcal{E}_1 \cap \mathcal{E}_2\} \geq 1 - \mathbb{P}\{\bar{\mathcal{E}}_1\} - \mathbb{P}\{\bar{\mathcal{E}}_2\} \geq 1 - \beta_{1_i} - \beta_{2_i}.$$

Therefore, the solution Θ_i^* via solving SOP_ζ in (4.4) is a feasible solution for ROP (4.1) with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i}$, which completes the proof. \square

Proof. (Lemma 10.1) We first compute Lipschitz constants of $\mathcal{L}_{g_{i_1}} - \mathcal{L}_{g_{i_4}}$ with respect to x and $\mathcal{L}_{g_{i_5_k}}$ with respect to x_i and w_i , and then take the maximum among them. By defining

$$\mathcal{L}^{g_{i_5_k x}} : \begin{cases} \max_{x_i \in X_i} & \left\| \frac{\partial g_{i_5_k}}{\partial x_i} \right\|, \\ \text{s.t.} & \|x_i\| \leq s_i, \|w_i\| \leq s'_i, \end{cases}$$

¹One can readily verify that $\eta_{R_i}^*$ is always bigger than or equal to $\eta_{N_i}^*$ because $\eta_{R_i}^*$ is computed for infinitely-many constraints, whereas $\eta_{N_i}^*$ is computed only for finitely many of them.

one has

$$\begin{aligned}
\mathcal{L}_{g^{i_5 k_x}} &= \max_{x_i \in X_i} \|2(A_i^\top P_i A_i - \kappa_{i_k} P_i)x_i + 2A_i^\top P_i D_i w_i\| \\
&\leq \max_{x_i \in X_i} \|2(A_i^\top P_i A_i - \kappa_{i_k} P_i)\| \|x_i\| + \|2A_i^\top P_i D_i\| \|w_i\| \\
&\leq 2s_i(\|A_i^\top P_i A_i\| + \kappa_{i_k} \|P_i\|) + 2s'_i \|A_i\| \|P_i\| \|D_i\| \\
&\leq 2s_i(\|P_i\| \|A_i\|^2 + \kappa_{i_k} \|P_i\|) + 2s'_i \|A_i\| \|P_i\| \|D_i\| \\
&\leq 2\lambda_{\max}(P_i)(s_i(\mathcal{L}_{A_i}^2 + \kappa_{i_k}) + s'_i \mathcal{L}_{A_i} \mathcal{L}_{D_i}).
\end{aligned}$$

Similarly, be defining

$$\mathcal{L}_{g^{i_5 w}} : \begin{cases} \max_{w_i \in W_i} & \|\frac{\partial g_{i_5}}{\partial w_i}\|, \\ \text{s.t.} & \|x_i\| \leq s_i, \|w_i\| \leq s'_i, \end{cases}$$

one has

$$\begin{aligned}
\mathcal{L}_{g^{i_5 w}} &= \max_{w_i \in W_i} \|2D_i^\top P_i D_i w_i + 2D_i^\top P_i A_i x_i - 2\rho_i w_i\| \\
&\leq \max_{w_i \in W_i} 2\|D_i^\top P_i D_i\| \|w_i\| + 2\|D_i^\top P_i A_i\| \|x_i\| + 2\rho_i \|w_i\| \\
&\leq 2s'_i \|D_i^\top P_i D_i\| + 2s_i \|D_i\| \|P_i\| \|A_i\| + 2\mathcal{L}_{\rho_i} s'_i \\
&\leq 2\lambda_{\max}(P_i)(s'_i \mathcal{L}_{D_i}^2 + s_i \mathcal{L}_{A_i} \mathcal{L}_{D_i}) + 2\mathcal{L}_{\rho_i} s'_i.
\end{aligned}$$

Then $\mathcal{L}_{g^{i_5 k_x}} = (\mathcal{L}_{g^{i_5 k_x}}^2 + \mathcal{L}_{g^{i_5 w}}^2)^{\frac{1}{2}}$. Similarly for g_{i_1} - g_{i_4} , we have $\mathcal{L}_{g_{i_1}} = \mathcal{L}_{g_{i_3}} = \mathcal{L}_{g_{i_4}} \leq 2s_i \lambda_{\max}(P_i)$, $\mathcal{L}_{g_{i_2}} \leq 2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i})$. Then $\mathcal{L}_{g_i} = \max\{\mathcal{L}_{g_{i_1}}, \mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g^{i_5 k_x}}\} = \max\{2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i}), (\mathcal{L}_{g^{i_5 k_x}}^2 + \mathcal{L}_{g^{i_5 w}}^2)^{\frac{1}{2}}\}$, which completes the proof. \square

Proof. (Lemma 10.3) By defining

$$\mathcal{L}_{g^{i_5 k_x}} : \begin{cases} \max_{x_i \in X_i} & \|\frac{\partial g_{i_5 k_x}}{\partial x_i}\|, \\ \text{s.t.} & \|x_i\| \leq s_i, \|w_i\| \leq s'_i, \end{cases}$$

$$\mathcal{L}_{g^{i_5 w}} : \begin{cases} \max_{w_i \in W_i} & \|\frac{\partial g_{i_5}}{\partial w_i}\|, \\ \text{s.t.} & \|x_i\| \leq s_i, \|w_i\| \leq s'_i, \end{cases}$$

one has $\mathcal{L}_{g^{i_5 k_x}} \leq 2\lambda_{\max}(P_i)(\mathcal{L}_i \mathcal{L}_{x_i} + \kappa_{i_k} s_i)$, $\mathcal{L}_{g^{i_5 w}} \leq 2\lambda_{\max}(P_i) \mathcal{L}_i \mathcal{L}_{w_i} + 2\mathcal{L}_{\rho_i} s'_i$. Then $\mathcal{L}_{g^{i_5 k_x}} = (\mathcal{L}_{g^{i_5 k_x}}^2 + \mathcal{L}_{g^{i_5 w}}^2)^{\frac{1}{2}}$. Similarly for g_{i_1} - g_{i_4} , we have $\mathcal{L}_{g_{i_1}} = \mathcal{L}_{g_{i_3}} = \mathcal{L}_{g_{i_4}} \leq 2s_i \lambda_{\max}(P_i)$, $\mathcal{L}_{g_{i_2}} \leq 2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i})$. Then $\mathcal{L}_{g_{i_k}} = \max\{\mathcal{L}_{g_{i_1}}, \mathcal{L}_{g_{i_2}}, \mathcal{L}_{g_{i_3}}, \mathcal{L}_{g_{i_4}}, \mathcal{L}_{g^{i_5 k_x}}\} = \max\{2s_i(\lambda_{\max}(P_i) + \mathcal{L}_{\alpha_i}), (\mathcal{L}_{g^{i_5 k_x}}^2 + \mathcal{L}_{g^{i_5 w}}^2)^{\frac{1}{2}}\}$, which completes the proof. \square

Proof. (Theorem 6.1) We first show that conditions (3.1)-(3.2) hold. For any $x := [x_1; \dots; x_M] \in X_0 = \prod_{i=1}^M X_{0_i}$, we have

$$\mathcal{B}(q, x) = \sum_{i=1}^M \mathcal{B}_i(q_i, x_i) \leq \sum_{i=1}^M \gamma_i = \gamma,$$

and similarly for any $x := [x_1; \dots; x_N] \in X_c = \prod_{i=1}^M X_{c_i}$, one has

$$\mathcal{B}(q, x) = \sum_{i=1}^M \mathcal{B}_i(q_i, x_i) \geq \sum_{i=1}^M \lambda_i = \lambda,$$

satisfying conditions (3.1)-(3.2) with $\gamma = \sum_{i=1}^M \gamma_i$ and $\lambda = \sum_{i=1}^M \lambda_i$. Note that $\lambda > \gamma$ according to (6.1).

Now we show that condition (3.3) holds, as well. By employing condition (3.5) and compositionality condition $\mathbf{1}_M^\top(-\Lambda + \Delta) < 0$, one can obtain the chain of inequalities in (10.3). By defining

$$\begin{aligned} \kappa s &:= \max \left\{ s + \mathbf{1}_M^\top(-\Lambda + \Delta) \bar{\mathcal{B}}(q, x) \mid \mathbf{1}_M^\top \bar{\mathcal{B}}(q, x) = s \right\}, \\ \psi &:= \sum_{i=1}^M \psi_i, \end{aligned} \quad (10.2)$$

where $\bar{\mathcal{B}}(q, x) = [\mathcal{B}_1(q_1, x_1); \dots; \mathcal{B}_M(q_M, x_M)]$, condition (3.3) is also satisfied. We now show that $\kappa = 1 + \pi$ and $0 < \kappa < 1$. Since $\mathbf{1}_M^\top(-\Lambda + \Delta) := [\pi_1; \dots; \pi_M]^\top < 0$, and $\max_{1 \leq i \leq M} \pi_i < \pi < 0$ with $\pi \in (-1, 0)$, one has

$$\begin{aligned} \kappa s &= s + \mathbf{1}_M^\top(-\Lambda + \Delta) \bar{\mathcal{B}}(q, x) = s + [\pi_1; \dots; \pi_M]^\top [\mathcal{B}_1(q_1, x_1); \dots; \mathcal{B}_M(q_M, x_M)] \\ &= s + \pi_1 \mathcal{B}_1(q_1, x_1) + \dots + \pi_M \mathcal{B}_M(q_M, x_M) \leq s + \pi (\mathcal{B}_1(q_1, x_1) + \dots + \mathcal{B}_M(q_M, x_M)) = s + \pi s = (1 + \pi)s. \end{aligned}$$

Then $\kappa s \leq (1 + \pi)s$, and accordingly, $\kappa \leq 1 + \pi$. Since $\max_{1 \leq i \leq M} \pi_i < \pi < 0$ with $\pi \in (-1, 0)$, then $0 < \kappa = 1 + \pi < 1$, which completes the proof. Note that since each agent \mathcal{A}_i admits its SBC \mathcal{B}_i with a confidence of at least $1 - \beta_{1_i} - \beta_{2_i}$, one can readily conclude that \mathcal{B} is a BC for the multi-agent AV \mathcal{A} with a confidence of at least $1 - \sum_{i=1}^M \beta_{1_i} - \sum_{i=1}^M \beta_{2_i}$. \square

Proof. (Theorem 7.1) According to condition (3.7), one has $X_{c_i} \subseteq \{x_i \in X_i \mid \mathcal{B}_i(x_i) \geq \lambda_i\}$. Then we have

$$\begin{aligned} &\mathbb{P} \left\{ x_{x_{0_i}}(k) \in X_{c_i} \text{ for } 0 \leq k < \mathcal{T}_i \mid x_{0_i} = x_i(0) \right\} \\ &\leq \mathbb{P} \left\{ \sup_{0 \leq k < \mathcal{T}} \mathcal{B}_i(x_i(k)) \geq \lambda_i \mid x_{0_i} = x_i(0) \right\}. \end{aligned} \quad (10.4)$$

Since

$$\mathbb{E} \left[\mathcal{B}_i(f_i(x_i, w_i, \varsigma_i)) \mid x_i, w_i \right] \leq \kappa_i \mathcal{B}_i(x_i) + \hat{\psi}_i, \text{ with } \hat{\psi}_i = \rho_i \|w_i\|_\infty^2 + \psi_i, \quad (10.5)$$

the collision risk estimation for each agent \mathcal{A}_i in (7.2) follows directly by applying [31, Corrolary 2-1, Chapter III] to (10.4) and employing, respectively, conditions (10.5) and (3.6). \square

$$\begin{aligned}
\mathbb{E}[\mathcal{B}(q, f(x, \varsigma)) \mid x] &= \mathbb{E}\left[\sum_{i=1}^M \mathcal{B}_i(q_i, f_i(x_i, w_i, \varsigma_i)) \mid x, w\right] = \sum_{i=1}^M \mathbb{E}\left[\mathcal{B}_i(q_i, f_i(x_i, w_i, \varsigma_i)) \mid x, w\right] \\
&= \sum_{i=1}^M \mathbb{E}\left[\mathcal{B}_i(q_i, f_i(x_i, w_i, \varsigma_i)) \mid x_i, w_i\right] \leq \sum_{i=1}^M (\kappa_i \mathcal{B}_i(q_i, x_i) + \rho_i \|w_i\|^2 + \psi_i) \\
&\leq \sum_{i=1}^M (\kappa_i \mathcal{B}_i(q_i, x_i) + \rho_i \sum_{j=1, i \neq j}^M \|w_{ij}\|^2 + \psi_i) = \sum_{i=1}^M (\kappa_i \mathcal{B}_i(q_i, x_i) + \rho_i \sum_{j=1, i \neq j}^M \|x_j\|^2 + \psi_i) \\
&= \sum_{i=1}^M (\kappa_i \mathcal{B}_i(q_i, x_i) + \sum_{j=1, i \neq j}^M \rho_i \|x_j\|^2 + \psi_i) \leq \sum_{i=1}^M (\kappa_i \mathcal{B}_i(q_i, x_i) + \sum_{j=1, i \neq j}^M \frac{\rho_i}{\alpha_j} \mathcal{B}_j(q_j, x_j) + \psi_i) \\
&= \sum_{i=1}^M \mathcal{B}_i(q_i, x_i) - \sum_{i=1}^M (\hat{\lambda}_i \mathcal{B}_i(q_i, x_i) + \sum_{j=1, i \neq j}^M \hat{\delta}_{ij} \mathcal{B}_j(q_j, x_j) + \psi_i) \\
&= \mathcal{B}(q, x) + \mathbf{1}_M^\top (-\Lambda + \Delta) [\mathcal{B}_1(q_1, x_1); \dots; \mathcal{B}_M(q_M, x_M)] + \sum_{i=1}^M \psi_i \leq (1 + \pi) \mathcal{B}(q, x) + \psi. \tag{10.3}
\end{aligned}$$

Proof. (**Theorem 7.2**) Since

$$\mathbb{P}\{\mathcal{A}_1 \models \varphi_1 \cup \dots \cup \mathcal{A}_M \models \varphi_M\} \leq \mathbb{P}\{\mathcal{A}_1 \models \varphi_1\} + \dots + \mathbb{P}\{\mathcal{A}_M \models \varphi_M\},$$

we have

$$\mathbb{P}\{\mathcal{A}_1 \models \varphi_1 \cup \dots \cup \mathcal{A}_M \models \varphi_M\} \leq \delta_1 + \dots + \delta_M = \sum_{i=1}^M \delta_i.$$

By defining collision events \mathcal{E}_i and \mathcal{E} as

$$\begin{aligned}
\mathcal{E}_i &= \left\{ \mathbb{P}\{\mathcal{A}_i \models \varphi_i\} \leq \delta_i \right\}, \quad \forall i \in \{1, \dots, M\}, \\
\mathcal{E} &= \left\{ \mathbb{P}\{\mathcal{A}_1 \models \varphi_1 \cup \dots \cup \mathcal{A}_M \models \varphi_M\} \leq \sum_{i=1}^M \delta_i \right\},
\end{aligned}$$

one has $\mathbb{P}\{\mathcal{E}_i\} \geq 1 - \beta_i, \forall i \in \{1, \dots, M\}$. We now aim at computing a lower bound for $\mathbb{P}\{\mathcal{E}\}$. We have

$$\mathbb{P}\{\bar{\mathcal{E}}_1 \cup \dots \cup \bar{\mathcal{E}}_M\} \leq \mathbb{P}\{\bar{\mathcal{E}}_1\} + \dots + \mathbb{P}\{\bar{\mathcal{E}}_M\} \leq \beta_1 + \dots + \beta_M = \sum_{i=1}^M \beta_i, \tag{10.6}$$

with $\bar{\mathcal{E}}_i$ being complements of $\mathcal{E}_i, \forall i \in \{1, \dots, M\}$. Since $\bar{\mathcal{E}} \subseteq \bar{\mathcal{E}}_1 \cup \dots \cup \bar{\mathcal{E}}_M$, one has $\mathbb{P}\{\bar{\mathcal{E}}\} \leq \mathbb{P}\{\bar{\mathcal{E}}_1 \cup \dots \cup \bar{\mathcal{E}}_M\}$. By employing (10.6), one has $\mathbb{P}\{\bar{\mathcal{E}}\} \leq \sum_{i=1}^M \beta_i$. Subsequently, $\mathbb{P}\{\mathcal{E}\} \geq 1 - \sum_{i=1}^M \beta_i$, which completes the proof. \square

Proof. (**Theorem 8.2**) We show the statement based on contradiction. Let x_{x_0} of \mathcal{A} start at some $x_0 \in X_0$. Suppose x_{x_0} reaches inside X_c . Based on conditions (3.1)-(3.2), one has $\mathcal{B}(x(0)) \leq \gamma$ and $\mathcal{B}(x(k)) \geq \lambda$ for

some $k \in \mathbb{N}$. Since $\mathcal{B}(x(\cdot))$ is a BC and by employing condition (8.2), one can conclude that $\lambda \leq \mathcal{B}(x(k)) \leq \mathcal{B}(x(0)) \leq \gamma$. This contradicts condition $\lambda > \gamma$, which completes the proof. \square

Proof. (Theorem 8.7) According to (8.5), since $\mathcal{B}_i(x_i(k+1)) - \mathcal{B}_i(x_i(k)) \leq \rho_i \|w_i\|_\infty^2$, one can recursively infer that $\mathcal{B}_i(x_i(k)) - \mathcal{B}_i(x_i(0)) \leq \rho_i \|w_i\|_\infty^2 k$. By employing condition (3.6), we have $\mathcal{B}_i(x_i(k)) \leq \gamma_i + \rho_i \|w_i\|_\infty^2 k$. Now since $\gamma_i + \rho_i \|w_i\|_\infty^2 \mathcal{T}_i < \lambda_i$, one can readily conclude that $\mathcal{B}_i(x_i(k)) < \lambda_i$. From condition (3.7), one gets $x_i(k) \notin X_{c_i}$ for any $k \in [0, \mathcal{T}_i)$. This implies that the collision risk is zero for each agent \mathcal{A}_i for the finite time horizon $\mathcal{T}_i = \frac{\lambda_i - \gamma_i}{\rho_i \|w_i\|_\infty^2}$, which completes the proof. \square