

Electromagnetic Property Sensing in ISAC with Multiple Base Stations: Algorithm, Pilot Design, and Performance Analysis

Yuhua Jiang, Feifei Gao, Shi Jin, and Tiejun Cui

Abstract—Integrated sensing and communication (ISAC) has opened up numerous game-changing opportunities for future wireless systems. In this paper, we develop a novel scheme that utilizes orthogonal frequency division multiplexing (OFDM) pilot signals to sense the electromagnetic (EM) property of the target and thus identify the materials of the target. Specifically, we first establish an EM wave propagation model with Maxwell equations, where the EM property of the target is captured by a closed-form expression of the channel. We then build the mathematical model for the relative permittivity and conductivity distribution (RPCD) within a predetermined region of interest shared by multiple base stations (BSs). Based on the EM wave propagation model, we propose an EM property sensing method, in which the RPCD can be reconstructed from compressive sensing techniques that exploits the joint sparsity structure of the EM property vector. We then develop a fusion algorithm to combine data from multiple BSs, which can enhance the reconstruction accuracy of EM property by efficiently integrating diverse measurements. Moreover, the fusion is performed at the feature level of RPCD and features low transmission overhead. We further design the pilot signals that can minimize the mutual coherence of the equivalent channels and enhance the diversity of incident EM wave patterns. Simulation results demonstrate the efficacy of the proposed method in achieving high-quality RPCD reconstruction and accurate material classification.

Index Terms—Electromagnetic (EM) property sensing, material identification, integrated sensing and communication (ISAC), cooperative sensing, orthogonal frequency division multiplexing (OFDM)

I. INTRODUCTION

Recently, the emergence of integrated sensing and communication (ISAC) has unlocked a multitude of revolutionary possibilities for the forthcoming wireless sensing systems. ISAC facilitates the sharing of the limited radio spectrum between sensing and communications (S&C) systems and thereby significantly reduces resource costs [1]–[4]. In contrast to the conventional approach of separate functionalities for S&C, ISAC methodology brings two distinct advantages. Firstly, by enabling the joint utilization of constrained resources such as spectrum, energy, and hardware platforms, ISAC

enhances efficiency for both S&C and thus yields integration benefits. Secondly, the collaborative synergy between S&C fosters coordination gains and thereby amplifies the overall performance. Consequently, ISAC has the potential to improve the capabilities of both S&C functionalities in the foreseeable future [5]–[8]. Thanks to its myriad benefits, ISAC would play a pivotal role in various forthcoming applications, including intelligent connected vehicles, internet of things (IoT), and smart homes and cities [9]–[12].

ISAC with multiple base stations (BSs) has emerged as a pivotal area of research, which focuses on the coordinated use of resources across a network of BSs to simultaneously enhance S&C capabilities [13]–[15]. This approach is underpinned by the principle of leveraging shared information and coordinated actions among multiple BSs. Recent advancements have explored various facets of ISAC with multiple BSs, including power control [16], cooperative sensing [17], and beamforming strategies [18], which collectively optimize the BSs' ability to sense the environment in a more accurate way while maintaining robust communication links. These efforts are crucial to realize the next generation of wireless networks, where the seamless integration of S&C will lead to innovative applications in areas such as autonomous vehicles, smart cities, and advanced surveillance systems [19]–[22].

Actually, ISAC technologies primarily serve the purpose of generating an accurate representation that connects the physical world with its communication digital twin counterpart [23], [24]. Unlike image-based digital twins that focus on shape and location, communication oriented digital twins require reconstructing the communication channel as well as the channel related tasks. In this context, accurate electromagnetic (EM) property of the objects in the physical world is vital to build communication digital twins, because it determines the propagation direction, attenuation, and physical phenomena such as diffraction, reflection, and scattering of EM waves that transmit communication signals. Meanwhile, the property of EM characteristics is essential for the identification of materials in targets and would significantly impact a wide range of industries. For instance, sensing EM property is applicable in the inspection and imaging of the human body, which caters to the growing needs in social security, environmental surveillance, and medical fields.

Traditional methods sense EM property via infrared detection, which utilizes the unique infrared emissivity property of each material [25]. However, these methods typically require expensive and specialized equipment that is difficult to

Y. Jiang and F. Gao are with Institute for Artificial Intelligence, Tsinghua University (THUAI), State Key Lab of Intelligent Technologies and Systems, Tsinghua University, Beijing National Research Center for Information Science and Technology (BNRist), Beijing, P.R. China (email: jiangyh20@mails.tsinghua.edu.cn, feifeigao@ieee.org).

S. Jin is with the National Mobile Communications Research Laboratory, Southeast University, Nanjing 210096, China (e-mail: jinshi@seu.edu.cn).

T. Cui is with the State Key Laboratory of Millimeter Waves, Southeast University, Nanjing 210096, China (e-mail: tjcui@seu.edu.cn).

produce and sustain [26]. Additionally, infrared detection is hindered by its limited ability to penetrate targets, especially when the surface is covered with camouflage, which makes the conventional methods ineffective. On the other hand, the ability of relatively low-frequency EM waves to penetrate various objects makes EM wave detection in communication frequency band a practical and promising alternative for reliable EM property sensing [27]. Since the EM property of target materials is implicitly embedded within the channel state information (CSI) from transmitters to receivers, it is possible to sense EM property via ISAC technologies.

Although ISAC has demonstrated significant achievements in localization [28], tracking [29], imaging [30], as well as various other applications [5], [7], [9], [31], EM property sensing within the ISAC framework has been barely studied. To the best of the authors' knowledge, only one work [32] implements EM property sensing under single-BS ISAC systems. However, the estimation accuracy and the resolution under a single-BS ISAC system are not satisfactory.

In this paper, we develop a novel scheme that utilizes pilot signals in an ISAC system with multiple BSs to sense the EM property of the target and identify the constituent materials. The main contributions are summarized as follows:

- We rigorously derive a formulation of EM property sensing equations from the EM scattering theory for multiple user equipments (UEs) and multiple BSs. This approach particularly focuses on the accurate estimation of relative permittivity and conductivity distribution (RPCD) in a region of interest shared by all BSs.
- We propose a fusion algorithm to combine data from multiple BSs at the RPCD feature level, which enhances the reconstruction accuracy of EM property by efficiently integrating diverse measurements and boasts small information redundancy as well as low transmission overhead.
- We design orthogonal frequency division multiplexing (OFDM) pilots across multiple subcarriers to reduce mutual coherence in ISAC systems, which guarantees the feasibility of employing compressive sensing techniques to estimate EM property and thereby secures the reliability and accuracy of the overall sensing process.

Simulation results reveal that the proposed method successfully delivers high-quality reconstruction of RPCD as well as precise material classification. Moreover, improvements in the quality of RPCD reconstruction and the accuracy of material classification can be achieved by either increasing the signal-to-noise ratio (SNR) at the receivers or utilizing the data from more BSs.

The rest of this paper is organized as follows. Section II presents the system model and formulates the EM property sensing problem. Section III elaborates the strategy of sensing EM property. Section IV describes the scheme of data fusion with multiple BSs. Section V proposes the approach to designing the pilots and identifying the materials of the target. Section VI provides the numerical simulation results, and Section VII draws the conclusion.

Notations: Boldface denotes a vector or a matrix; j corresponds to the imaginary unit; $(\cdot)^H$, $(\cdot)^T$, and $(\cdot)^*$ represent Hermitian, transpose, and conjugate, respectively; \circ denotes

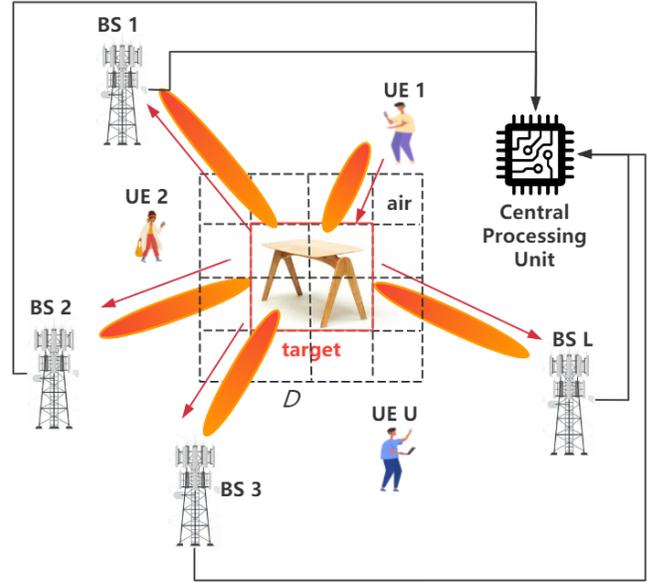


Fig. 1. The system model is composed of U multi-antenna UEs, a target to be sensed in region D , and L multi-antenna BSs.

the Khatri-Rao product; \odot denotes the Hadamard product; \otimes denotes the Kronecker product; $\text{vec}(\cdot)$ denotes the vectorization operation; $\text{diag}(\mathbf{a})$ denotes the diagonal matrix whose diagonal elements are the elements of \mathbf{a} ; \mathbf{I} , $\mathbf{1}$, and $\mathbf{0}$ denote the identity matrix, the all-ones vector, and the all-zeros vector with compatible dimensions; $\|\mathbf{a}\|_2$ denotes ℓ_2 -norm of the vector \mathbf{a} ; $|\mathbf{a}|$ denotes the element-wise absolute value of the complex vector \mathbf{a} ; $\Re(\cdot)$ and $\Im(\cdot)$ denote the real and imaginary part of complex vectors or matrices, respectively; $\text{Tr}(\cdot)$ denotes the trace of a matrix; $\text{prox}_{f(\cdot)}$ denotes the proximal mapping of the function $f(\cdot)$; $\|\mathbf{A}\|_F$ denotes Frobenius-norm of the matrix \mathbf{A} ; $\mathbf{A} \succeq \mathbf{0}$ indicates that the matrix \mathbf{A} is positive semi-definite; the distribution of a circularly symmetric complex Gaussian random vector with zero mean and covariance matrix \mathbf{A} is denoted as $\mathcal{CN}(\mathbf{0}, \mathbf{A})$.

II. SYSTEM MODEL

A. Signal Model

Consider an uplink OFDM communication scenario with U mobile UEs and L BSs. The L BSs collaboratively provide EM property sensing service for a single target and are connected using cables by a central processing unit. Assume that each UE is equipped with N_t transmitting antennas, and each BS is equipped with N_r receiving antennas. The scenario is also known as the multi-static ISAC system. The UEs all adopt fully digital precoding structure where the number of RF chains N_{RF} is equal to the number of antennas N_t . To facilitate EM property sensing, we utilize pilot transmissions over K subcarriers. The central frequency of the OFDM signals is represented by f_c , and the interval between subcarriers is denoted by Δf .

In order to avoid interference between multiple UEs, we assume the ISAC system utilizes the time-division duplex (TDD) mode, i.e., only one UE sends the pilot signals at one

time. Additionally, it is assumed that each UE transmits I pilot symbols at each subcarrier.

The overall sensing procedure involves several essential steps. Initially, the target's presence is detected [3], [10], [11], [33], which is a critical prerequisite for subsequent analysis. Next, ISAC determines the exact location and velocity of the detected target [5], [7], [9], [29], [31]. These parameters offer crucial spatial context, facilitating accurate interaction with the target. Lastly, the EM property of the target is sensed to gather material-specific information [32]. Hence, we here assume that information such as the approximate region occupied by the target has already been obtained.

Suppose the target scatters the pilot signals from the UE to the BSs as shown in Fig. 1. Since only the signals scattered by the target carry the information of its EM property, the UE may purposely send the pilot signals towards the target by beamforming. The overall ISAC channel from the u -th UE to the l -th BS at the k -th subcarrier thus only consists of the target scattering path channel $\hat{\mathbf{H}}_{k,l,u} \in \mathbb{C}^{N_r \times N_t}$. Thus, the signals received by the l -th BS can be formulated as:

$$\tilde{\mathbf{y}}_{k,l,u} = \hat{\mathbf{H}}_{k,l,u} \mathbf{w}_{k,u} + \tilde{\mathbf{n}}_{k,l}, \quad (1)$$

where $\mathbf{w}_{k,u} \in \mathbb{C}^{N_t \times 1}$ is the digital pilot symbols on the k -th subcarrier, and $\tilde{\mathbf{n}}_{k,l} \sim \mathcal{CN}(\mathbf{0}_{N_r}, \sigma_{k,l}^2 \mathbf{I}_{N_r})$ is the complex Gaussian noise at the l -th BS on the k -th subcarrier. We will demonstrate that $\mathbf{w}_{k,u}$ should be designed in a varying way across the subcarriers and hence a fully digital system is required.

Assume prior knowledge has determined that the target is contained within a certain region to be sensed, denoted by D , which can be discretized into M sampling points. Let the vectors $\mathbf{E}_k^{i,D} \in \mathbb{C}^{M \times 1}$ and $\mathbf{J}_k^D \in \mathbb{C}^{M \times 1}$ collect the incident electric field and the equivalent contrast source at all M sampling points in D , respectively [34]–[36]. Define $\mathbf{H}_{1,k,u} \in \mathbb{C}^{M \times N_t}$ as the channel matrix from the u -th UE to the target that maps $\mathbf{w}_{k,u}$ to $\mathbf{E}_k^{i,D}$, and define $\mathbf{H}_{2,k,l} \in \mathbb{C}^{N_r \times M}$ as the channel matrix from the target to the l -th BS path that maps \mathbf{J}_k^D to $\tilde{\mathbf{y}}_{k,l}$. The ISAC channel from the UE through region D to the l -th BS can then be described as:

$$\hat{\mathbf{H}}_{k,l,u} = \mathbf{H}_{2,k,l} \mathbf{X}_k \mathbf{H}_{1,k,u}, \quad (2)$$

where $\mathbf{X}_k \in \mathbb{C}^{M \times M}$ maps $\mathbf{E}_k^{i,D}$ to \mathbf{J}_k^D and is irrelevant to u and l , which represents the influence of the existence of the target on the signal transmission. Thus, the material-related EM property of the target is implicitly incorporated into the formulation of \mathbf{X}_k , which will be leveraged to identify the material of the target.

B. EM Wave Propagation Model

In this subsection, the closed-form expression of \mathbf{X}_k is derived to unveil the influence of the target scattering process on the signal transmission.

Sensing the EM property in region D involves reconstructing the contrast function $\chi_k(\mathbf{r}')$, which is defined as the difference in complex relative permittivity between the target and air. Given that the relative permittivity and conductivity

of air are approximately equal to 1 and 0 S/m, respectively, we can formulate $\chi_k(\mathbf{r}')$ as [35], [37], [38]

$$\chi_k(\mathbf{r}') = \epsilon_r(\mathbf{r}') + \frac{j\sigma(\mathbf{r}')}{\epsilon_0\omega_k} - 1, \quad (3)$$

where $\epsilon_r(\mathbf{r}')$ denotes the real relative permittivity at point \mathbf{r}' , $\sigma(\mathbf{r}')$ denotes the conductivity at point \mathbf{r}' , $\omega_k = 2\pi f_k$ denotes the angular frequency of EM waves at the k -th subcarrier, and ϵ_0 is the vacuum permittivity. We then aim to reconstruct the distributions of the relative permittivity, $\epsilon_r(\mathbf{r}')$, and the conductivity, $\sigma(\mathbf{r}')$. The total electric field for the k -th subcarrier within region D can be described by the Lippmann-Schwinger (LS) equation [34], [39]

$$E_k^t(\mathbf{r}) = E_k^i(\mathbf{r}) + k_k^2 \int_D G_k(\mathbf{r}, \mathbf{r}') \chi_k(\mathbf{r}') E_k^t(\mathbf{r}') d\mathbf{r}', \quad (4)$$

where $k_k = \frac{\omega_k}{c}$ represents the wavenumber at the k -th subcarrier. Moreover, $E_k^t(\mathbf{r})$, $E_k^i(\mathbf{r})$, and $G_k(\mathbf{r}, \mathbf{r}')$ denote the total electric field, the incident electric field, and the Green's function, respectively.

Let the vectors $\mathbf{E}_k^{s,D} \in \mathbb{C}^{M \times 1}$, $\mathbf{E}_k^{t,D} \in \mathbb{C}^{M \times 1}$, and $\chi_k \in \mathbb{C}^{M \times 1}$ collect the scattering electric field, the total electric field, and $\chi_k(\mathbf{r})$ on all M sampling points in D , respectively. Let $\mathbf{G}_k \in \mathbb{C}^{M \times M}$ represent the matrix obtained by discretizing the integral kernel $k_k^2 G_k(\mathbf{r}, \mathbf{r}')$ in (4) using the method of moments (MoM). In \mathbf{G}_k , both \mathbf{r} and \mathbf{r}' correspond to the discretized sampling points within region D .

According to [32], the closed-form expression of \mathbf{X}_k in (2) can be written as:

$$\mathbf{X}_k = \text{diag}(\chi_k) [\mathbf{I} - \mathbf{G}_k \text{diag}(\chi_k)]^{-1}. \quad (5)$$

For those sampling points occupied by the air within D , the corresponding rows of \mathbf{X}_k are all zeros, and those points are not regarded as EM sources of scattering waves.

Denote $\tilde{\mathbf{W}}_{k,u} = [\mathbf{w}_{k,u,1}, \mathbf{w}_{k,u,2}, \dots, \mathbf{w}_{k,u,I}] \in \mathbb{C}^{N_t \times I}$ as the digital transmitter beamforming matrix stacked by time at the k -th subcarrier. Then the overall received pilot signals $\mathbf{Y}_{k,l,u} \in \mathbb{C}^{N_r \times I}$ can be formulated in a compact form as:

$$\begin{aligned} \mathbf{Y}_{k,l,u} &= [\tilde{\mathbf{y}}_{k,l,u,1}, \tilde{\mathbf{y}}_{k,l,u,2}, \dots, \tilde{\mathbf{y}}_{k,l,u,I}] \\ &= \mathbf{H}_{2,k,l} \text{diag}(\chi_k) [\mathbf{I} - \mathbf{G}_k \text{diag}(\chi_k)]^{-1} \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u} \\ &\quad + [\tilde{\mathbf{n}}_{k,l,1}, \tilde{\mathbf{n}}_{k,l,2}, \dots, \tilde{\mathbf{n}}_{k,l,I}]. \end{aligned} \quad (6)$$

Define the equivalent channel from the u -th user to the target as $\tilde{\mathbf{H}}_{1,k,u} = \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u}$ and horizontally concatenate the equivalent channels into $\tilde{\mathbf{H}}_{1,k} = [\tilde{\mathbf{H}}_{1,k,1}, \dots, \tilde{\mathbf{H}}_{1,k,U}]$. Then we can vectorize $\mathbf{Y}_{k,l,u}$ ($u = 1, \dots, U$) to $\mathbf{y}_{k,l} \in \mathbb{C}^{U N_r \times 1}$ as:

$$\begin{aligned} \mathbf{y}_{k,l} &= \text{vec}([\mathbf{Y}_{k,l,1}, \dots, \mathbf{Y}_{k,l,U}]) \\ &\stackrel{(a)}{=} \left[\left(\tilde{\mathbf{H}}_{1,k}^\top [\mathbf{I} - \mathbf{G}_k \text{diag}(\chi_k)]^{-\top} \right) \circ \mathbf{H}_{2,k,l} \right] \chi_k + \mathbf{n}_{k,l}, \end{aligned} \quad (7)$$

where $\stackrel{(a)}{=}$ in (7) comes from the equality: $\text{vec}(\mathbf{A} \text{diag}(\mathbf{b}) \mathbf{C}) = (\mathbf{C}^\top \circ \mathbf{A}) \mathbf{b}$, and $\mathbf{n}_{k,l} = [\tilde{\mathbf{n}}_{k,l,1}^\top, \tilde{\mathbf{n}}_{k,l,2}^\top, \dots, \tilde{\mathbf{n}}_{k,l,I}^\top]^\top$ denotes the overall vectorized noise.

In order to derive a quasi-linear sensing model, we further define the sensing matrix $\mathbf{D}_{k,l} \in \mathbb{C}^{UIN_r \times M}$ as:

$$\mathbf{D}_{k,l} \triangleq \left\{ \bar{\mathbf{H}}_{1,k}^\top [\mathbf{I} - \mathbf{G}_k \text{diag}(\boldsymbol{\chi}_k)]^{-\top} \right\} \circ \mathbf{H}_{2,k,l}. \quad (8)$$

Then the sensing equation with respect to $\boldsymbol{\chi}_k$ can be formally formulated as:

$$\mathbf{y}_{k,l} = \mathbf{D}_{k,l} \boldsymbol{\chi}_k + \mathbf{n}_{k,l}. \quad (9)$$

III. EM PROPERTY SENSING

In this section, we propose an EM property sensing method by fusing received pilot signals of all K subcarriers from the same BS. Denote the central angular frequency as $\omega_c = 2\pi f_c$ and denote the corresponding contrast vector as $\boldsymbol{\chi}_c = \boldsymbol{\varepsilon}_r - \mathbf{1}_M + \frac{j\boldsymbol{\sigma}}{\omega_c \varepsilon_0}$. Denote $\mathbf{z}_{k,l} = \left[\Re(\mathbf{y}_{k,l})^\top, \Im(\mathbf{y}_{k,l})^\top \right]^\top$ and the EM property vector as $\mathbf{s} = \left[(\boldsymbol{\varepsilon}_r - \mathbf{1}_M)^\top, \left(\frac{1}{\omega_c \varepsilon_0} \boldsymbol{\sigma}\right)^\top \right]^\top$. We then define the real-valued weighted sensing matrix as:

$$\mathbf{E}_{k,l} = \begin{bmatrix} \Re(\mathbf{D}_{k,l}) & -\frac{\omega_c}{\omega_k} \Im(\mathbf{D}_{k,l}) \\ \Im(\mathbf{D}_{k,l}) & \frac{\omega_c}{\omega_k} \Re(\mathbf{D}_{k,l}) \end{bmatrix}. \quad (10)$$

Separating the real and imaginary part of equation (9) and extracting frequency-related components in $\boldsymbol{\chi}_k$, we can derive the real-valued sensing equation as:

$$\mathbf{z}_{k,l} = \mathbf{E}_{k,l} \mathbf{s} + \left[\Re(\mathbf{n}_{k,l})^\top, \Im(\mathbf{n}_{k,l})^\top \right]^\top. \quad (11)$$

Define the general vector of measurement $\tilde{\mathbf{z}}_l \in \mathbb{R}^{2UIN_r K \times 1}$ and the general sensing matrix $\tilde{\mathbf{E}}_l \in \mathbb{R}^{2UIN_r K \times 2M}$ as:

$$\tilde{\mathbf{z}}_l = [\mathbf{z}_{1,l}^\top, \dots, \mathbf{z}_{K,l}^\top]^\top, \quad (12)$$

$$\tilde{\mathbf{E}}_l = [\mathbf{E}_{1,l}^\top, \dots, \mathbf{E}_{K,l}^\top]^\top. \quad (13)$$

Given that the region D is mainly filled with air and the target occupies a relatively small part within D , most of the elements of \mathbf{s} are 0 corresponding to the EM property of the air. Additionally, $(\boldsymbol{\varepsilon}_r - \mathbf{1}_M)$ and $\frac{1}{\omega_c \varepsilon_0} \boldsymbol{\sigma}$ share the same support set and the same sparse structure. Utilizing the compressive sensing techniques, \mathbf{s} can be reconstructed by the l -th BS individually as the solution to the following regularized mixed $\ell(1,2)$ -norm minimization problem:

$$\min_{\mathbf{s}} h_l(\mathbf{s}) \triangleq \frac{1}{2} \|\tilde{\mathbf{z}}_l - \tilde{\mathbf{E}}_l \mathbf{s}\|_2^2 + \lambda_l \|\mathbf{s}\|_{1,2} \quad (14a)$$

$$\text{s.t. } \mathbf{s} \geq \mathbf{0}_{2M}, \quad (14b)$$

where λ_l represents a predetermined positive regularization parameter that should be chosen appropriately. The constraint $\mathbf{s} \geq \mathbf{0}_{2M}$ indicates all elements of \mathbf{s} are nonnegative and holds true because the conductivity is nonnegative and the relative permittivity is larger than or equal to 1. Moreover, $\|\mathbf{s}\|_{1,2}$ is the mixed $\ell(1,2)$ -norm defined as: $\|\mathbf{s}\|_{1,2} \triangleq \sum_{m=1}^M \sqrt{s_m^2 + s_{m+M}^2}$.

In particular, (14) can be considered as the maximum a posteriori (MAP) estimation problem, where the prior probability density function of \mathbf{s} is $\lambda_l e^{-\lambda_l \|\mathbf{s}\|_{1,2}}$. Given the prior information, (14) focuses on harnessing the joint sparsity of \mathbf{s} to enhance the sensing performance.

IV. FEATURE-LEVEL MULTI-BS DATA FUSION

In this section, we design the multi-BS data fusion algorithm to improve the accuracy of RPCD reconstructions compared to the single-BS sensing results. In order to reduce the transmission overhead between BSs and the central processing unit, we perform the feature-level fusion based on the EM property of the collected data. In this approach, only the most relevant features of RPCD are extracted and transmitted, rather than the raw data, i.e., the received signals. Thus, the feature-level fusion reduces the amount of information exchanged while preserving the quality and utility of the data for further processing and analysis.

A. Multi-Agent Consensus Equilibrium

In the multi-BS network, each BS collects information from an individual perspective and can be considered as an agent for the shared EM property sensing task. Therefore, we utilize the multi-agent consensus equilibrium (MACE) framework to harmonize the sensing results of multiple BSs [40], with the goal of enhancing the quality of RPCD reconstruction. In order to solve problem (14) from signals received at all BSs, we introduce the general MAP cost function $h(\mathbf{s})$ as the sum of $h_l(\mathbf{s})$, aiming to minimize these individual cost functions collaboratively, i.e.,

$$\min_{\mathbf{s}} h(\mathbf{s}) \triangleq \sum_{l=1}^L \zeta_l h_l(\mathbf{s}) \quad (15a)$$

$$\text{s.t. } \mathbf{s} \geq \mathbf{0}_{2M}, \quad (15b)$$

where ζ_l is the normalized weight coefficient and satisfies $\sum_{l=1}^L \zeta_l = 1$.

In order to understand the relationship between (15) and MACE, we define the l -th agent $F_l(\cdot)$ as the proximal mapping of $\sigma^2 \zeta_l h_l(\cdot)$, i.e., a mapping in the following form:

$$\begin{aligned} F_l(\mathbf{s}) &= \mathbf{prox}_{\sigma^2 \zeta_l h_l(\cdot)}(\mathbf{s}) = \arg \min_{\mathbf{v}, \mathbf{v} \geq \mathbf{0}_{2M}} \left\{ \frac{\|\mathbf{v} - \mathbf{s}\|_2^2}{2} + \sigma^2 \zeta_l h_l(\mathbf{v}) \right\} \\ &= \arg \min_{\mathbf{v}, \mathbf{v} \geq \mathbf{0}_{2M}} \left\{ \frac{\|\mathbf{v} - \mathbf{s}\|_2^2}{2\sigma^2 \zeta_l} + \frac{1}{2} \|\tilde{\mathbf{z}}_l - \tilde{\mathbf{E}}_l \mathbf{v}\|_2^2 + \lambda_l \|\mathbf{v}\|_{1,2} \right\}, \end{aligned} \quad (16)$$

where σ is a hyperparameter shared by all BSs that controls the convergence speed.

The core concept of MACE is that each BS applies an abstract force, represented as an offset, to a consensus solution. MACE is achieved when the collective forces exerted by all the BSs balance each other out, which is called equilibrium in physics [41]. Specifically, the consensus solution of all BSs, defined as $\mathbf{s}^* \in \mathbb{R}^{M \times 1}$, is found by solving the following set of MACE equations:

$$F_l(\mathbf{s}^* + \mathbf{u}_l^*) = \mathbf{s}^*, \quad l = 1, \dots, L, \quad (17)$$

$$\sum_{l=1}^L \mathbf{u}_l^* = \mathbf{0}_{2M}, \quad (18)$$

where $\mathbf{u}_l^* \in \mathbb{R}^{M \times 1}$ represents the abstract force applied by the l -th BS that should satisfy (18) in order to achieve equilibrium among all BSs.

According to (16) and (17) as well as the convexity of $h_l(\cdot)$, there is

$$[\mathbf{s}^* - (\mathbf{s}^* + \mathbf{u}_l^*)] + \sigma^2 \zeta_l \partial h_l(\mathbf{s}^*) \ni \mathbf{0}_{2M}, \quad l = 1, \dots, L, \quad (19)$$

where $\partial h_l(\cdot)$ is the subgradient of $h_l(\cdot)$. Thus, by summing (19) over l and applying (18), we obtain

$$\partial h(\mathbf{s}^*) \ni \mathbf{0}_{2M}. \quad (20)$$

Note that (20) always holds irrespective of the choice of σ , which only influences the time to reach consensus. Considering the convexity of $h(\cdot)$, it has been proven that the stationary point \mathbf{s}^* is the global minimum of the general MAP cost function $h(\cdot)$. Therefore, the solution \mathbf{s}^* to the MACE equations (17) and (18) is exactly the solution to the MAP reconstruction problem of equation (15).

The main calculation step in the MACE equations is to compute $F_l(\cdot)$ in (16). In order to solve (16) efficiently, we define the indicator function corresponding to the constraint $\mathbf{v} \geq \mathbf{0}_{2M}$ as

$$\mathbb{I}(\mathbf{v}) = \begin{cases} 0, & \mathbf{v} \geq \mathbf{0}_{2M} \\ +\infty, & \text{otherwise} \end{cases}. \quad (21)$$

Then the constraint $\mathbf{v} \geq \mathbf{0}_{2M}$ can be replaced by incorporating the indicator function (21) into the objective function. We can then solve (16) using the alternating direction method of multipliers (ADMM). With an auxiliary variable $\mathbf{a} \in \mathbb{R}^{2M \times 1}$, (16) can be equivalently transformed into

$$\min_{\mathbf{v}, \mathbf{a}} \frac{1}{2} \|\tilde{\mathbf{z}}_l - \tilde{\mathbf{E}}_l \mathbf{v}\|_2^2 + \mathbb{I}(\mathbf{a}) + \lambda_l \|\mathbf{a}\|_{1,2} + \frac{1}{2\sigma^2 \zeta_l} \|\mathbf{a} - \mathbf{s}\|_2^2 \quad (22a)$$

$$\text{s.t. } \mathbf{v} = \mathbf{a}. \quad (22b)$$

The reason for the above transformation is that the first term in (22a) can be regarded as the fidelity term, while the remaining three terms in (22a) can be regarded as the regularization terms given by prior knowledge. Since both the fidelity term and the regularization terms are convex functions, ADMM guarantees the finding of the global minimum of the objective function. To equivalently convert (22) into an optimization problem without the constraint, the augmented Lagrangian function $L_l(\mathbf{v}, \mathbf{a}, \mathbf{b})$ associated with the optimization problem (22) is defined as

$$L_l(\mathbf{v}, \mathbf{a}, \mathbf{b}) = \frac{1}{2} \|\tilde{\mathbf{z}}_l - \tilde{\mathbf{E}}_l \mathbf{v}\|_2^2 + \mathbb{I}(\mathbf{a}) + \lambda_l \|\mathbf{a}\|_{1,2} + \frac{\|\mathbf{a} - \mathbf{s}\|_2^2}{2\sigma^2 \zeta_l} - \mathbf{b}^\top (\mathbf{a} - \mathbf{v}) + \frac{1}{2\eta_l} \|\mathbf{a} - \mathbf{v}\|_2^2, \quad (23)$$

where $\mathbf{b} \in \mathbb{R}^{2M \times 1}$ is the Lagrangian multiplier and η_l is the penalty factor. Given the initial vector set $\{\mathbf{v}^{(0)}, \mathbf{a}^{(0)}, \mathbf{b}^{(0)}\}$

and until a certain stopping criterion is satisfied, ADMM generates the sequence $(\mathbf{v}^{(n)}, \mathbf{a}^{(n)}, \mathbf{b}^{(n)})$ recursively as follows:

$$\begin{aligned} \mathbf{v}^{(n+1)} &= \arg \min_{\mathbf{v}} L_l(\mathbf{v}, \mathbf{a}^{(n)}, \mathbf{b}^{(n)}) \\ &= \left(\tilde{\mathbf{E}}_l^\top \tilde{\mathbf{E}}_l + \frac{1}{\eta_l} \mathbf{I} \right)^{-1} \left[\tilde{\mathbf{E}}_l^\top \tilde{\mathbf{z}}_l + \frac{1}{\eta_l} (\mathbf{a}^{(n)} - \eta_l \mathbf{b}^{(n)}) \right], \end{aligned} \quad (24)$$

$$\begin{aligned} \mathbf{a}^{(n+1)} &= \arg \min_{\mathbf{a}} L_l(\mathbf{v}^{(n+1)}, \mathbf{a}, \mathbf{b}^{(n)}) = \arg \min_{\mathbf{a}} \left\{ \mathbb{I}(\mathbf{a}) \right. \\ &\quad \left. + \lambda_l \|\mathbf{a}\|_{1,2} + \frac{\|\mathbf{a} - \mathbf{s}\|_2^2}{2\sigma^2 \zeta_l} + \frac{\|\mathbf{a} - \mathbf{b}^{(n)} - \mathbf{v}^{(n+1)}\|_2^2}{2\eta_l} \right\}, \end{aligned} \quad (25)$$

$$\mathbf{b}^{(n+1)} = \mathbf{b}^{(n)} - \frac{1}{\eta_l} (\mathbf{v}^{(n+1)} - \mathbf{a}^{(n+1)}). \quad (26)$$

Since (25) is relatively difficult to solve, we then elaborate the details of the update of $\mathbf{a}^{(n+1)}$. Let $a_m^{(n+1)}$ denote the m -th element of $\mathbf{a}^{(n+1)}$. Note that (25) can be decomposed into M uncorrelated subproblems, with the m -th subproblem being formulated as

$$\begin{aligned} (a_m^{(n+1)}, a_{m+M}^{(n+1)}) &= \arg \min_{a_m, a_{m+M}} \left\{ \mathbb{I}(a_m, a_{m+M}) + \lambda_l \sqrt{a_m^2 + a_{m+M}^2} \right. \\ &\quad \left. + \left(\frac{1}{2\eta_l} + \frac{1}{2\sigma^2 \zeta_l} \right) \left[a_m - \frac{\sigma^2 \zeta_l (b_m^{(n)} + v_m^{(n+1)}) + \eta_l s_m}{\sigma^2 \zeta_l + \eta_l} \right]^2 \right. \\ &\quad \left. + \left(\frac{1}{2\eta_l} + \frac{1}{2\sigma^2 \zeta_l} \right) \left[a_{m+M} - \frac{\sigma^2 \zeta_l (b_{m+M}^{(n)} + v_{m+M}^{(n+1)}) + \eta_l s_{m+M}}{\sigma^2 \zeta_l + \eta_l} \right]^2 \right\}. \end{aligned} \quad (27)$$

Define $\tilde{\mathbf{a}}_m = [a_m, a_{m+M}]^\top$ and $g(\tilde{\mathbf{a}}_m) = \mathbb{I}(\tilde{\mathbf{a}}_m) + \lambda_l \|\tilde{\mathbf{a}}_m\|_2$. Note that (27) can be interpreted as finding the proximal mapping of $\frac{2\eta_l \sigma^2 \zeta_l}{\eta_l + \sigma^2 \zeta_l} g(\cdot)$. Define $\mathbf{c}^{(n)} = \left[\frac{\sigma^2 \zeta_l (b_m^{(n)} + v_m^{(n+1)}) + \eta_l s_m}{\sigma^2 \zeta_l + \eta_l}, \frac{\sigma^2 \zeta_l (b_{m+M}^{(n)} + v_{m+M}^{(n+1)}) + \eta_l s_{m+M}}{\sigma^2 \zeta_l + \eta_l} \right]^\top$.

The solution of (27) is then given by

$$\begin{aligned} a_m^{(n+1)} &= \max \left\{ 0, \left[1 - \frac{2\eta_l \sigma^2 \zeta_l \lambda_l}{(\sigma^2 \zeta_l + \eta_l) \max\{\|\mathbf{c}^{(n)}\|_2, \frac{2\eta_l \sigma^2 \zeta_l \lambda_l}{\eta_l + \sigma^2 \zeta_l}\}} \right] \right. \\ &\quad \left. \times \frac{\sigma^2 \zeta_l (b_m^{(n)} + v_m^{(n+1)}) + \eta_l s_m}{\sigma^2 \zeta_l + \eta_l} \right\}, \end{aligned} \quad (28)$$

$$\begin{aligned} a_{m+M}^{(n+1)} &= \max \left\{ 0, \left[1 - \frac{2\eta_l \sigma^2 \zeta_l \lambda_l}{(\sigma^2 \zeta_l + \eta_l) \max\{\|\mathbf{c}^{(n)}\|_2, \frac{2\eta_l \sigma^2 \zeta_l \lambda_l}{\eta_l + \sigma^2 \zeta_l}\}} \right] \right. \\ &\quad \left. \times \frac{\sigma^2 \zeta_l (b_{m+M}^{(n)} + v_{m+M}^{(n+1)}) + \eta_l s_{m+M}}{\sigma^2 \zeta_l + \eta_l} \right\}. \end{aligned} \quad (29)$$

By solving (27) for $m = 1, \dots, M$, we can obtain the solution to (25) whose elements are listed in (28) and (29). Furthermore, by repeating (24)-(26) until the convergence of ADMM, the solution to (16) is given by the final $\mathbf{v}^{(n)}$ in (24).

The computational complexity of the operator $F_l(\cdot)$ is dominated by the update of $\mathbf{v}^{(n)}$ in ADMM. Suppose the maximum iteration number is N_{ADMM} . Then the complexity of calculating $F_l(\cdot)$ is $O(N_{ADMM}(UIN_r K M^2 + M^3))$ in the worst case.

B. Finding MACE by Solving Fixed-Point Problem

Since the MACE equations (17) and (18) are difficult to solve straightforwardly, we will further elucidate the solution process.

Note that even with the same input, the output of $F_l(\cdot)$ may be different across BSs due to the difference in $\tilde{\mathbf{E}}_l$. Thus, let \mathbf{s}_l denote the RPCD vector reconstructed by the l -th BS. We horizontally stack the vectors $\mathbf{s}_l, l = 1, \dots, L$, to form the overall MACE state as

$$\mathbf{S} = [\mathbf{s}_1, \dots, \mathbf{s}_L]. \quad (30)$$

Define the unified proximal operator by horizontally stacking the proximal mappings $F_l(\cdot), l = 1, \dots, L$, as

$$\mathbf{F}(\mathbf{S}) = [F_1(\mathbf{s}_1), \dots, F_L(\mathbf{s}_L)]. \quad (31)$$

Since each column of $\mathbf{F}(\mathbf{S})$ is individually calculated by a certain BS, $\mathbf{F}(\mathbf{S})$ contains multiple and possibly inconsistent reconstructions. In order to yield a single RPCD reconstruction, we define the averaging operator as

$$\mathbf{G}(\mathbf{S}) = \frac{1}{L} \mathbf{S} \mathbf{1}_L \mathbf{1}_L^\top = [\bar{x}(\mathbf{S}), \dots, \bar{x}(\mathbf{S})], \quad (32)$$

where $\bar{x}(\mathbf{S}) = \frac{1}{L} \mathbf{S} \mathbf{1}_L = \frac{1}{L} \sum_{l=1}^L \mathbf{s}_l$. The operator $\mathbf{G}(\mathbf{S})$ computes the average of the components in \mathbf{S} , and then returns the matrix formed by duplicating $\bar{x}(\mathbf{S})$ L times. Note that the averaging operator $\mathbf{G}(\mathbf{S})$ is idempotent, i.e., $\mathbf{G}(\mathbf{G}(\mathbf{S})) = \mathbf{G}(\mathbf{S})$. Since $\mathbf{s}_l = \mathbf{s}^* + \mathbf{u}_l^*$ when MACE is achieved, the MACE equations, i.e., (17) and (18), can be reformulated compactly as

$$\mathbf{F}(\mathbf{S}^*) = \mathbf{G}(\mathbf{S}^*), \quad (33)$$

where \mathbf{S}^* is the solution of (33). Equation (33) can be interpreted as finding a consensus equilibrium among all BSs. The final MACE reconstruction is then given by $\mathbf{s}^* = \bar{x}(\mathbf{S}^*)$, and the columns of $\mathbf{F}(\mathbf{S}^*) - \mathbf{S}^*$ are \mathbf{u}_l^* in (18), $l = 1, \dots, L$, whose summation is $\mathbf{0}_{2M}$.

The MACE equation (33) can be solved in a convenient way by converting the equation to a fixed-point problem, which can be efficiently and effectively solved by using the Mann iteration method [42]. Define the auxiliary variable \mathbf{Q}^* as

$$\mathbf{Q}^* = (2\mathbf{G} - \mathbf{I})\mathbf{S}^*. \quad (34)$$

Since \mathbf{G} is idempotent, there is $(2\mathbf{G} - \mathbf{I})^2 = \mathbf{I}$, i.e., $(2\mathbf{G} - \mathbf{I})$ is self-inverse. From (34), we have $\mathbf{S}^* = (2\mathbf{G} - \mathbf{I})\mathbf{Q}^*$. Moreover, with (33), there is

$$(2\mathbf{F} - \mathbf{I})\mathbf{S}^* = (2\mathbf{G} - \mathbf{I})\mathbf{S}^*. \quad (35)$$

Substituting $\mathbf{S}^* = (2\mathbf{G} - \mathbf{I})\mathbf{Q}^*$ into (35) and using the self-inverse property of $2\mathbf{G} - \mathbf{I}$, we obtain

$$(2\mathbf{F} - \mathbf{I})(2\mathbf{G} - \mathbf{I})\mathbf{Q}^* = \mathbf{Q}^*. \quad (36)$$

Therefore, the solution to the MACE equation (33) is exactly the fixed point of the composition operator $\mathbf{T} = (2\mathbf{F} - \mathbf{I})(2\mathbf{G} - \mathbf{I})$ given by

$$\mathbf{T}(\mathbf{Q}^*) = \mathbf{Q}^*. \quad (37)$$

Algorithm 1 Multi-BS Data Fusion

- 1: **Input:** Initial guess $\mathbf{S}^{(0)}, \tilde{\mathbf{E}}_l^{(0)}$, convergence tolerance ϵ , relaxation parameter $\rho \in (0, 1)$
 - 2: **Output:** Consensus equilibrium \mathbf{s}^*
 - 3: Initialize iteration counter $k \leftarrow 0$
 - 4: Compute $\mathbf{Q}^{(0)} \leftarrow (2\mathbf{G} - \mathbf{I})\mathbf{S}^{(0)}$
 - 5: **repeat**
 - 6: Compute $\mathbf{T}^{(k)}(\mathbf{Q}^{(k)}) \leftarrow (2\mathbf{F}^{(k)} - \mathbf{I})(2\mathbf{G} - \mathbf{I})\mathbf{Q}^{(k)}$
 - 7: Compute $\mathbf{Q}^{(k+1)} \leftarrow \rho\mathbf{T}^{(k)}(\mathbf{Q}^{(k)}) + (1 - \rho)\mathbf{Q}^{(k)}$
 - 8: Compute $\mathbf{S}^{(k+1)} \leftarrow (2\mathbf{G} - \mathbf{I})\mathbf{Q}^{(k+1)}$
 - 9: Update $\tilde{\mathbf{E}}_l^{(k+1)}$ with $\mathbf{S}^{(k+1)}$ based on (8), (10), and (13)
 - 10: Update $F_l^{(k+1)}(\cdot)$ with $\tilde{\mathbf{E}}_l^{(k+1)}$ based on (16)
 - 11: Update $\mathbf{F}^{(k+1)}(\cdot)$ with $F_l^{(k+1)}(\cdot)$ based on (31)
 - 12: $k \leftarrow k + 1$
 - 13: **until** $\|\mathbf{Q}^{(k+1)} - \mathbf{Q}^{(k)}\|_F < \epsilon$
 - 14: Compute $\mathbf{S}^* \leftarrow (2\mathbf{G} - \mathbf{I})\mathbf{Q}^{(k)}$
 - 15: Compute final EM property reconstruction $\mathbf{s}^* \leftarrow \bar{x}(\mathbf{S}^*)$
-

We can calculate the fixed-point \mathbf{Q}^* using the Mann iterations [42]. In this approach, we start with an arbitrary initial guess $\mathbf{Q}^{(0)}$ and employ the following iterations:

$$\mathbf{Q}^{(k+1)} = \rho\mathbf{T}(\mathbf{Q}^{(k)}) + (1 - \rho)\mathbf{Q}^{(k)}, k \geq 0, \quad (38)$$

which guarantees the convergence to the fixed-point \mathbf{Q}^* under the condition that the relaxation parameter ρ is within the interval $(0, 1)$ and the operator \mathbf{T} is non-expansive [42].

The non-expansive property of \mathbf{T} is verified as follows. Since each $F_l(\cdot)$ is the proximal mapping of a convex function $h_l(\cdot)$, $F_l(\cdot)$ belongs to the class of resolvents. Therefore, both the concatenated proximal mapping resolvent \mathbf{F} and the reflection resolvent $2\mathbf{F} - \mathbf{I}$ are non-expansive [42]. Besides, it can be easily proven that the operator $2\mathbf{G} - \mathbf{I}$ is equivalent to right-multiplying $\mathbf{Q}^{(k)}$ by the matrix $(\frac{2}{L}\mathbf{1}_L\mathbf{1}_L^\top - \mathbf{I})$, which is the Householder transformation that belongs to orthogonal transformation and does not change the distance between two vectors. Thus, $2\mathbf{G} - \mathbf{I}$ is also non-expansive. Consequently, \mathbf{T} , as the composition operator of $2\mathbf{G} - \mathbf{I}$ and $2\mathbf{F} - \mathbf{I}$, is also non-expansive, and thus the iteration (38) is guaranteed to converge.

During the iterative process of EM property sensing, updating $\tilde{\mathbf{E}}_l$ and the function $F_l(\cdot)$ is crucial to refine EM property estimates. Initially, $\tilde{\mathbf{E}}_l$ is estimated using the Born approximation [37], [38], considering the scattering electric field as relatively minor compared to the incident electric field. With the Born approximation, there is

$$\begin{aligned} \mathbf{D}_{k,l} &= \left\{ \bar{\mathbf{H}}_{1,k}^\top \left[\mathbf{I} + \sum_{i=1}^{\infty} \left((\mathbf{G}_k \text{diag}(\chi_k)^{-\top})^i \right) \right] \right\} \circ \mathbf{H}_{2,k,l} \\ &\approx \bar{\mathbf{H}}_{1,k}^\top \circ \mathbf{H}_{2,k,l}. \end{aligned} \quad (39)$$

Approximation (39) allows for the calculation of the initial sensing matrix $\tilde{\mathbf{E}}_l^{(0)}$, which are then used to reconstruct the initial guess $\mathbf{S}^{(0)}$. In each iteration, $\tilde{\mathbf{E}}_l^{(k)}$ is updated to reflect the latest estimates of EM property, and $F_l^{(k)}(\cdot)$ is adjusted

accordingly to compensate for the errors introduced by approximation (39). This iterative adjustment leverages recursive linear approximations, which makes the RPCD reconstruction converge to accurate EM property of the target.

The proposed iteration procedure of multi-BS data fusion is summarized in Algorithm 1. Note that only $\mathbf{S}^{(k)}$ is transmitted between BSs and the central processing unit while $\tilde{\mathbf{E}}_l^{(k)}$ and $F_l^{(k)}(\cdot)$ can be updated by each BS locally without transmission to the central processing unit. The BSs only need to transmit a $2M$ -dimensional vector $\mathbf{s}_l^{(k)}$ to the central processing unit, saving the overhead of transmitting the general sensing matrix $\tilde{\mathbf{E}}_l$, whose dimension is $2UIN_rK \times 2M$. Thus, the transmission overhead is significantly decreased in Algorithm 1 compared to signal-level data fusion.

The complexity of Algorithm 1 is dominated by calculating $\mathbf{T}^{(k)}(\mathbf{Q}^{(k)})$ and updating $\mathbf{F}^{(k)}(\cdot)$. The complexity of calculating $\mathbf{T}^{(k)}(\mathbf{Q}^{(k)})$ is then dominated by calculating $\mathbf{F}^{(k)}(\mathbf{Q}^{(k)})$, i.e., $O(LN_{ADMM}(UIN_rKM^2 + M^3))$. Since the complexity of constructing $\mathbf{D}_{k,l}$ is $O(M^3 + M^2UI + UIN_rM)$, the complexity of updating $\tilde{\mathbf{E}}_l^{(k)}$ is $O(K(M^3 + M^2UI + UIN_rM))$. The complexity of updating $\mathbf{F}^{(k+1)}(\cdot)$ is then $O(KL(M^3 + M^2UI + UIN_rM))$. Therefore, the general computational complexity of Algorithm 1 with N_{iter} iterations can be summarized as $O(N_{iter}[LN_{ADMM}(UIN_rKM^2 + M^3) + KL(M^3 + M^2UI + UIN_rM)])$.

V. PILOT DESIGN AND MATERIAL IDENTIFICATION

A. Joint Design of Multi-Subcarrier Pilots

To enhance the diversity of incident EM wave patterns within region D , we can minimize the column mutual coherence of the equivalent channels from the u -th UE to the target, i.e., $\tilde{\mathbf{H}}_{1,k,u} \triangleq \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u}$. The column mutual coherence, which measures the correlation or linear dependence between signals or patterns, is a critical metric in this context [43], [44]. Reducing column mutual coherence enhances the clarity and distinctiveness of each pilot pattern and is crucial for effective EM property sensing. Since UEs typically do not have access to other UEs' CSI, each UE should independently design its pilot patterns.

Define $\mathbf{A}_{k,u} = [\mathbf{H}_{1,1,u} \tilde{\mathbf{W}}_{1,u}, \dots, \mathbf{H}_{1,k-1,u} \tilde{\mathbf{W}}_{k-1,u}]$, and define $\mathbf{A}_{1,u} = \mathbf{0}_M$ as a special case with $k = 1$. For each UE, we design the pilots for each subcarrier sequentially from $k = 1$ to K based on the following optimization:

$$\min_{\tilde{\mathbf{W}}_{k,u}, \xi_{k,u}} p(\tilde{\mathbf{W}}_{k,u}, \xi_{k,u}) = \left\| \tilde{\mathbf{W}}_{k,u}^H \mathbf{H}_{1,k,u}^H \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u} - \xi_{k,u} \mathbf{I} \right\|_F^2 + \gamma_{k,u} \left\| \mathbf{A}_{k,u}^H \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u} \right\|_F^2 \quad (40a)$$

$$\text{s.t.} \quad \left\| \tilde{\mathbf{W}}_{k,u} \right\|_F^2 \leq P_{k,u}, \quad (40b)$$

$$I\xi_{k,u} \geq \bar{P}_{k,u}, \quad (40c)$$

where $\gamma_{k,u}$ is a penalty factor, $\xi_{k,u}$ is a scaling factor that represents the overall power of the objective pilot patterns in region D , $P_{k,u}$ is the general power budget of the u -th UE for the k -th subcarrier, and $\bar{P}_{k,u}$ is the minimum overall power in region D .

In the objective function (40a), the first term aims at the reduction of the mutual coherence among different symbols transmitted within the same subcarrier. This is achieved by making the Gram matrix of the equivalent channel as orthogonal as possible, for each UE and at each subcarrier. Therefore, the ideal outcome is that the Gram matrix resembles $\xi_{k,u} \mathbf{I}$. The second term in (40a) aims at the reduction of the mutual coherence between symbols transmitted across different subcarriers. By minimizing this norm, the optimization ensures that the pilot patterns in region D across different subcarriers also remain as orthogonal as possible to each other, which is crucial to improve the overall system performance in multi-subcarrier ISAC environments. Therefore, a fully digital beamforming architecture is necessitated to adjust $\tilde{\mathbf{W}}_{k,u}$ at different carriers.

In order to solve the optimization problem (40), we can apply the projected gradient descent (PGD) method combined with Wirtinger calculus to the objective function (40a) [45]. We first need to calculate the gradient of $p(\tilde{\mathbf{W}}_{k,u}, \xi_{k,u})$ with respect to the conjugate of the variable $\tilde{\mathbf{W}}_{k,u}^*$. Using Wirtinger derivatives, we obtain

$$\frac{\partial p(\tilde{\mathbf{W}}_{k,u}, \xi_{k,u})}{\partial \tilde{\mathbf{W}}_{k,u}^*} = 2\mathbf{H}_{1,k,u}^H \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u} \left(\tilde{\mathbf{W}}_{k,u}^H \mathbf{H}_{1,k,u}^H \right. \\ \left. \times \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u} - \xi_{k,u} \mathbf{I} \right) + \gamma_{k,u} \mathbf{H}_{1,k,u}^H \mathbf{A}_{k,u} \mathbf{A}_{k,u}^H \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u}. \quad (41)$$

The PGD method involves two key steps: the gradient descent update and the projection onto the feasible set given by the constraints. Specifically, the update process for $\tilde{\mathbf{W}}_{k,u}^{(t)}$ can be formulated as

$$\dot{\tilde{\mathbf{W}}}_{k,u}^{(t+1)} = \tilde{\mathbf{W}}_{k,u}^{(t)} - \alpha_{k,u} \frac{\partial p(\tilde{\mathbf{W}}_{k,u}^{(t)}, \xi_{k,u}^{(t)})}{\partial \tilde{\mathbf{W}}_{k,u}^*}, \quad (42)$$

$$\tilde{\mathbf{W}}_{k,u}^{(t+1)} = \min \left\{ 1, \sqrt{\frac{P_{k,u}}{\left\| \dot{\tilde{\mathbf{W}}}_{k,u}^{(t+1)} \right\|_F^2}} \right\} \dot{\tilde{\mathbf{W}}}_{k,u}^{(t+1)}, \quad (43)$$

where $\alpha_{k,u}$ is the step size determined by the Armijo backtracking line search method, and the superscript (t) denotes the iteration number.

Next, the scaling factor is updated by directly minimizing (40a) and projecting $\xi_{k,u}$ onto (40c) as

$$\xi_{k,u}^{(t+1)} = \max \left\{ \frac{1}{I} \bar{P}_{k,u}, \frac{1}{I} \text{Tr} \left[(\tilde{\mathbf{W}}_{k,u}^{(t)})^H \mathbf{H}_{1,k,u}^H \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u}^{(t)} \right] \right\} \\ = \frac{1}{I} \max \left\{ \bar{P}_{k,u}, \left\| \mathbf{H}_{1,k,u} \tilde{\mathbf{W}}_{k,u}^{(t)} \right\|_F^2 \right\}. \quad (44)$$

The formulations (42)-(44) ensure that each iterative update not only minimizes $p(\tilde{\mathbf{W}}_{k,u}, \xi_{k,u})$ but also adheres to the constraints imposed by the power budget and the minimum power of the objective pilot patterns in region D .

The computational complexity of the joint design of multi-subcarrier pilots is dominated by the calculation of $\frac{\partial p(\tilde{\mathbf{W}}_{k,u}, \xi_{k,u})}{\partial \tilde{\mathbf{W}}_{k,u}^*}$. Suppose the PGD method takes $N_{k,u}$ iterations to converge, and then the complexity of designing $\tilde{\mathbf{W}}_{k,u}$ is $O(N_{k,u}(IN_tM + M^2I + I^2N_t + IN_t^2))$.

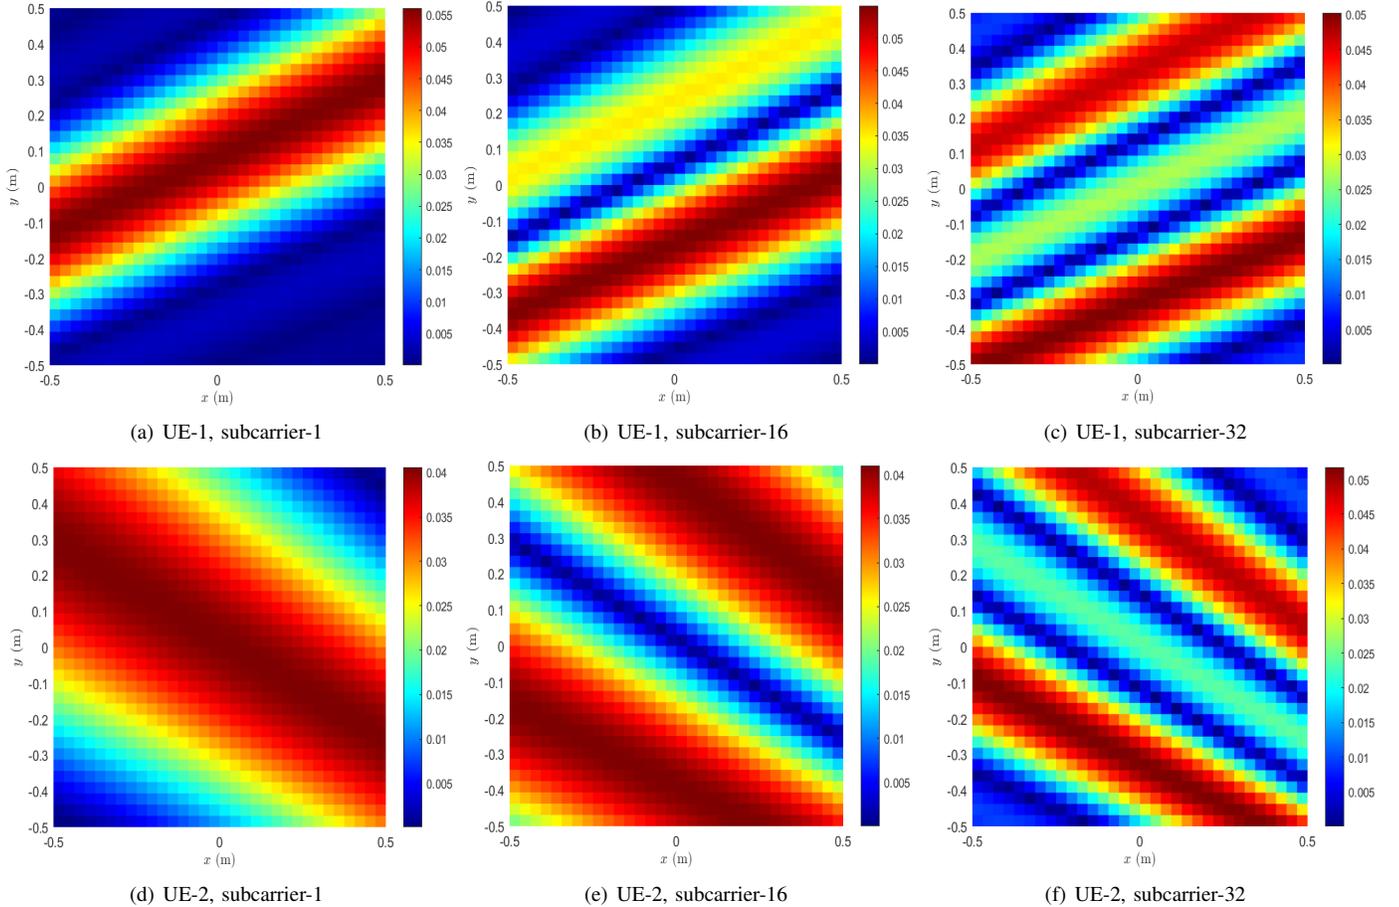


Fig. 2. Pilot patterns in the region D generated by different UEs and subcarriers demonstrated by $\left| \mathbf{E}_k^{i,D} \right|$.

To provide a vivid illustration of the joint multi-subcarrier pilots design, we show in Fig. 2 the pilot patterns $\left| \mathbf{E}_k^{i,D} \right|$ in region D . Suppose prior knowledge determines that the target is located within $D = [-0.5, 0.5] \times [-0.5, 0.5] \text{ m}^2$. We choose the number of sampling points as $M = 32 \times 32 = 1024$. There are 2 UEs equipped with 8-antennas uniform linear array (ULA). The inter-antenna spacing is set as 0.005 m. Two UEs are located at $(-9.3, -3.8) \text{ m}$ and $(4.4, -2.4) \text{ m}$, respectively. The central frequency is $f_c = 30 \text{ GHz}$ and the frequency spacing of OFDM subcarriers is $\Delta f = 120 \text{ KHz}$. For each UE, pilots are transmitted in $K = 32$ subcarriers. For brevity, we only show the pattern of the first pilot symbol in each subcarrier.

As shown in Fig. 2, the different subcarriers provide distinct pilot patterns in region D . However, due to relatively small number of the UE antennas in practice, the stripes of the patterns generated by the same UE are roughly in the same direction that is mainly determined by the position of the UE. Thus, a single UE may not be sufficient to generate pilots for the reconstruction of RPCD in D . To address this problem, we require multiple users at different positions to provide diverse views and resolutions of RPCD. Besides, since UE-2 is closer to D , the near-field effect is more prominent and the pilot pattern stripes are not parallel. Closer proximity leads to more diversity in the pattern style, which is more beneficial to RPCD

reconstruction. Despite the fact that each UE designs its pilots independently in (40), the pilot patterns of different UEs are inherently distinct and with low mutual coherence when the UEs are in different positions.

B. Material Identification Methodology

After RPCD reconstruction, the materials of the target can then be identified. Suppose that the target is known to be constituted by several possible materials, whose permittivity and conductivity are all precisely measured in advance. From the perspective of EM property sensing, only the materials with significant discrepancies in permittivity or conductivity can be distinguished. In detail, the material identification process consists of two steps: clustering and then classification.

In order to determine the material of the target, we first need to distinguish between the parts of region D occupied by different materials. To accomplish this, we utilize the density-based spatial clustering of applications with noise (DBSCAN) algorithm to divide the sampling points in D into several categories [46]. DBSCAN is an unsupervised algorithm with strong generalization of clusters for different shapes and sizes, and is guaranteed to converge regardless of the input data distribution. The approach to determining the DBSCAN hyper-parameters has been discussed in [47]. Since the relative permittivity and conductivity have different

dimensions, we adopt the non-dimensional and scale-invariant Mahalanobis distance as the metric in the DBSCAN clustering algorithm [48]. The number of clusters is self-adaptive and represents the estimated number of material categories. The cluster centroid of the air, which represents the average permittivity and conductivity values of the air, is typically close to $(1, 0)$. Conversely, the cluster centroids of the target materials, which individually represent their average permittivity and conductivity, are generally positioned significantly away from $(1, 0)$.

After DBSCAN clustering is performed, the next step is to determine the material categories of the target components. The procedure begins by eliminating outlier points from the data. Subsequently, we calculate the Mahalanobis distances between the centroids of each cluster, which represent the target materials, and the measured EM property values of each candidate material. The target materials are subsequently assigned to the categories that correspond to the smallest Mahalanobis distance, signifying the highest degree of similarity between the measured EM property of the target and the recognized characteristics of the known materials.

The computational complexity of the material identification is dominated by the DBSCAN clustering algorithm, whose complexity is $\mathcal{O}(M^2)$ in the worst case [49] and can be further improved by applying acceleration techniques [50].

VI. SIMULATION RESULTS AND ANALYSIS

Suppose the prior knowledge determines that the target is located within the region $D = [-1, 1] \times [-1, 1]$ m². A total of $U = 16$ UEs are randomly located in a circular region of radius 10 m centered at the origin but outside region D . We consider a ULA transmitter equipped with $N_t = 8$ antennas at each UE. The power budget is the same for all UEs and is evenly allocated to all subcarriers. For each UE, $I = 16$ pilot OFDM symbols are transmitted in each subcarrier. Assume 4 BSs are located in sequence at $(100, 0)$ m, $(0, 100)$ m, $(-100, 0)$ m, and $(0, -100)$ m, respectively. Each BS is equipped with $N_r = 64$ ULA antennas parallel to the x direction. We assume that the noise at each BS is subject to the same zero-mean circularly symmetric complex Gaussian distribution with the same covariance. The SNR is then defined as the ratio of the overall received signal power from all BSs to the overall noise power. The inter-antenna spacing for both the UEs and the BSs is set as 0.005 m. The central frequency is $f_c = 30$ GHz and the frequency spacing of OFDM subcarriers is $\Delta f = 120$ KHz. We choose the number of sampling points in region D as $M = 64 \times 64 = 4096$. Each sampling point in D can be regarded as a single pixel in an image, i.e., the RPCD image consists of $64 \times 64 = 4096$ pixels.

Besides, we introduce the normalized mean square error (NMSE) of RPCD reconstruction as the criterion to evaluate the performance of EM property sensing

$$\begin{aligned} \text{NMSE} &= 10 \log_{10} \frac{\|\mathbf{s} - \mathbf{s}^*\|_2^2}{\|\mathbf{s}\|_2^2} \\ &= 10 \log_{10} \frac{\|\boldsymbol{\epsilon}_r - \boldsymbol{\epsilon}_r^*\|_2^2 + \frac{1}{\omega_c^2 \epsilon_0^2} \|\boldsymbol{\sigma} - \boldsymbol{\sigma}^*\|_2^2}{\|\boldsymbol{\epsilon}_r\|_2^2 + \frac{1}{\omega_c^2 \epsilon_0^2} \|\boldsymbol{\sigma}\|_2^2}. \end{aligned} \quad (45)$$

In (45), the NMSE of RPCD combines the estimation errors of both $\boldsymbol{\epsilon}_r$ and $\boldsymbol{\sigma}$, which assesses the EM property sensing performance in a comprehensive way. Moreover, the material classification accuracy is defined as the ratio of the number of correctly classified samples to the total number of tested samples.

A. RPCD Reconstruction Performance versus SNR

To illustrate the RPCD reconstruction results vividly, we present the reconstructed images of the target based on relative permittivity and conductivity, respectively, with $L = 4$, $K = 20$, and SNR = 0 dB or 30 dB in Fig. 3. The target ‘‘THU’’ is the abbreviation of ‘‘Tsinghua University’’, and the three letters are composed of wood, chipboard, and plasterboard, respectively. It is seen from Fig. 3 that, the reconstructed RPCD can reflect the general shape of the target. The RPCD reconstructed at SNR = 30 dB is much more accurate to demonstrate the target’s shape compared to the RPCD reconstructed at SNR = 0 dB. Moreover, a higher SNR value results in more accurate reconstructed values of relative permittivity and conductivity, which leads to better representation of the target’s real EM property.

We explore the NMSE of reconstructed RPCD versus the SNR, as shown in Fig. 4. We set the number of subcarriers to be $K = 20$ and sequentially select several BSs and fuse their data at the feature level to enhance the overall accuracy of the reconstructed RPCD. It is seen from Fig. 4 that, the NMSE decreases with the increase of SNR in all cases, and the best performance is achieved when $L = 4$. The NMSE decreases fast in the beginning when the SNR increases from 0 dB to 10 dB. When the SNR reaches a threshold of approximately 20 dB, the NMSE reduces to an error floor and remains largely unchanged. At this level, the limitation on RPCD reconstruction quality is no longer due to noise at the BS but rather to the insufficient information about the target captured in the general sensing matrix. As signals from more BSs are utilized, more information of the target is integrated, which leads to a smaller error floor in RPCD reconstruction.

B. RPCD Reconstruction Performance versus Bandwidth

To demonstrate the RPCD reconstruction results, we present images of the target reconstructed based on relative permittivity and conductivity with $L = 4$ and SNR = 30 dB, for $K = 16$ and 64, respectively. The target ‘‘SEU’’ is the abbreviation of ‘‘Southeast University’’, and the three letters are composed of wood, chipboard, and plasterboard, respectively. As shown in Fig. 5, the RPCD reconstructed with $K = 64$ is more accurate to reflect the target’s shape compared to the RPCD reconstructed with $K = 16$. Moreover, a larger number of subcarriers yields more accurate reconstructed values of relative permittivity and conductivity, which leads to a better representation of the target’s real EM property.

We investigate the NMSE of reconstructed RPCD versus the bandwidth by changing the number of subcarriers K while keeping the frequency step Δf unchanged, as shown in Fig. 6. It is seen that, NMSE decreases with the increase of K in all cases, and the best performance is achieved when the

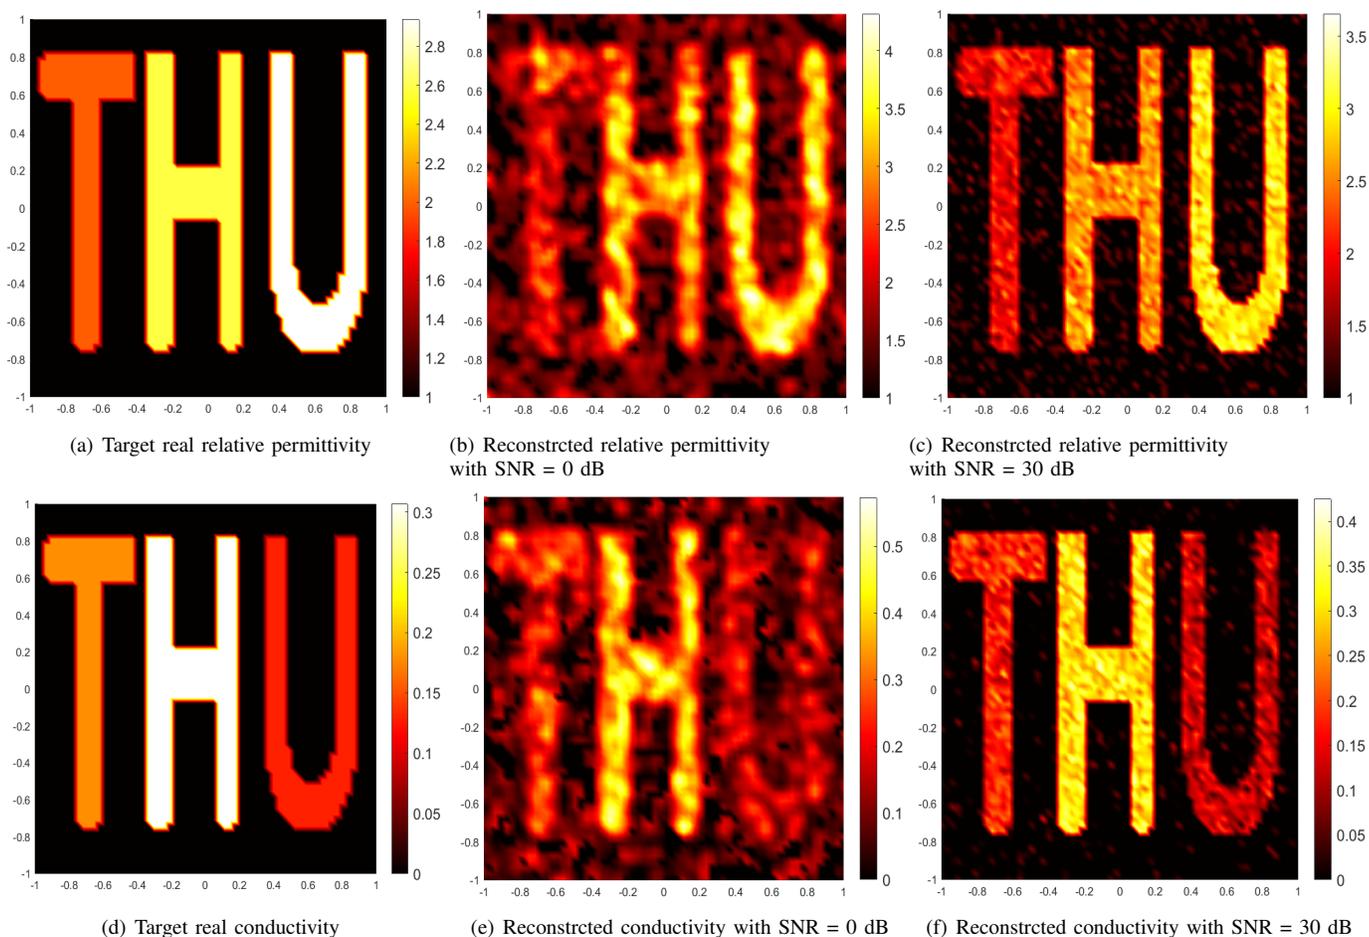


Fig. 3. RPCD reconstruction results versus SNR with $L = 4$ BSs and $K = 20$ subcarriers. Unit of conductivity is S/m.

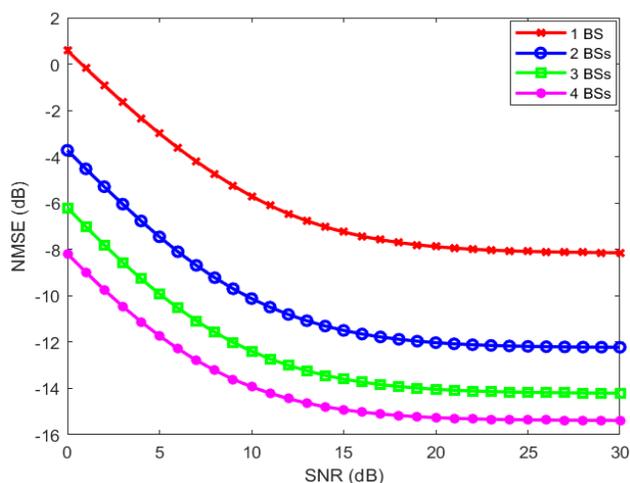


Fig. 4. NMSE of PRCD versus SNR with $K = 20$.

signals from all 4 BSs are used. This is because the increased bandwidth enhances the diversity of the pilot patterns and increases the number of sensing equations. Consequently, more information about RPCD is extracted, leading to better reconstruction accuracy.

C. Material Classification Accuracy versus SNR

Assume that the target may be composed of 10 possible kinds of materials in the database, including wood, concrete, chipboard, etc, whose relative permittivity and conductivity have been precisely measured in advance. The shape of the target is set to be identical to “THU” in Fig. 3, while the EM property of the target is decided by the material.

To provide an example of classifying the materials in region D , we show the clustering results using DBSCAN in Fig. 7 with $K = 20$, SNR = 30 dB, and $L = 4$. In Fig. 7, each data point represents a sampling point in region D , and the colors of the data points represent the classification results. It is observed that the cluster of the air is close to $(1, 0)$, whereas the clusters of the target materials are notably away from $(1, 0)$. Therefore, this separation enables clear differentiation between sampling points associated with air and those associated with the target materials.

Using the sampling points occupied by the target after removing the outlier points and the points associated with air, we show the material classification accuracy versus SNR with different L when $K = 20$ in Fig. 8. It is seen that, the classification accuracy increases with the increase of SNR for all L , and the best performance is achieved with $L = 4$. When the SNR is smaller than 5 dB, the accuracies are smaller than 60% for all L . The accuracy increases rapidly when the SNR



Fig. 5. RPCD reconstruction results versus K with $L = 4$ BSs and $\text{SNR} = 30$ dB. Unit of conductivity is S/m.

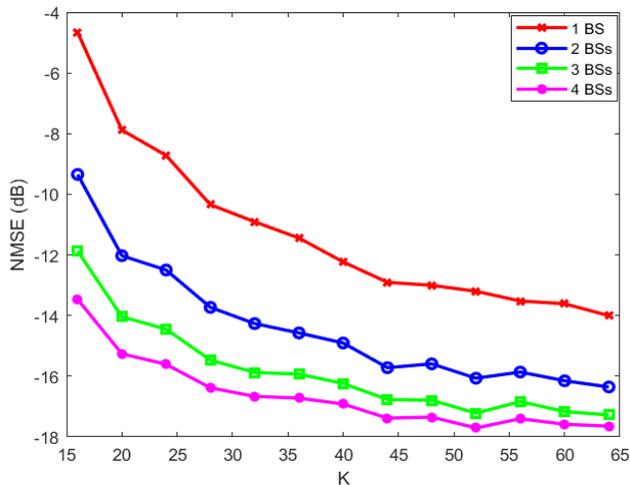


Fig. 6. NMSE of PRCD versus K with $\text{SNR} = 30$ dB.

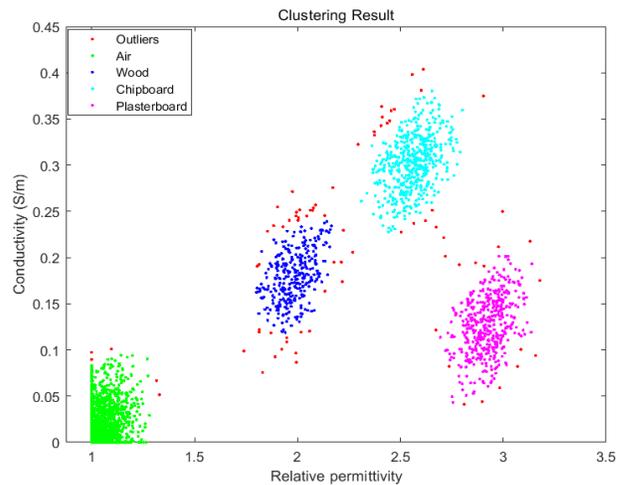


Fig. 7. Clustering results using the DBSCAN method.

increases from 0 dB to 10 dB and reaches an upper bound at about 20 dB. This is because larger SNR results in lower RPCD reconstruction errors, which offers higher classification accuracy according to Fig. 4 and Fig. 8.

D. Material Classification Accuracy versus Bandwidth

With $\text{SNR} = 30$ dB and under the same other simulation settings as in subsection C, we explore the material classification accuracy versus the bandwidth by changing the number of subcarriers K while keeping the frequency step Δf unchanged, as shown in Fig. 9. It is seen that, the classification

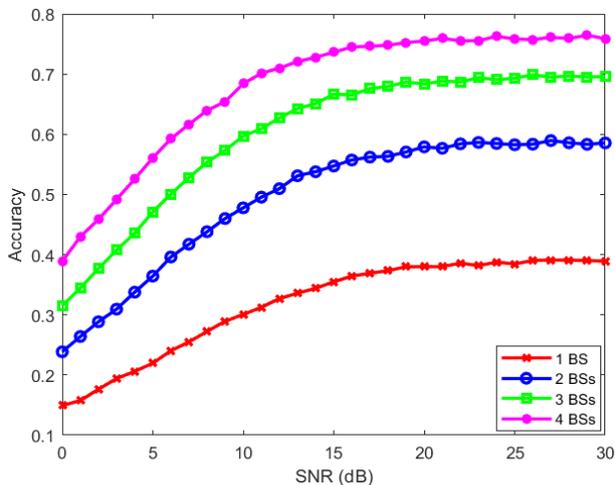


Fig. 8. Material classification accuracy versus SNR with $K = 20$.

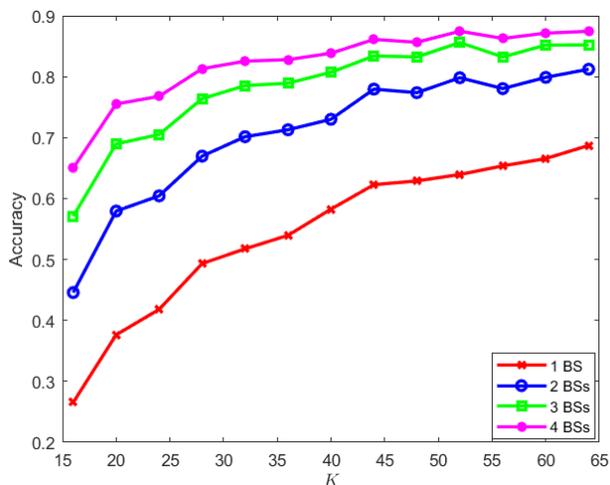


Fig. 9. Material classification accuracy versus K with SNR = 30 dB.

accuracy increases with the increase of K in all cases. The highest accuracy is achieved at $L = 4$ and $K = 64$, where the accuracy is 88%. When K is larger than 32, the accuracies are larger than 50% for all L . Generally speaking, larger K leads to lower RPCD reconstruction errors, which further provides higher classification accuracy according to Fig. 6 and Fig. 9.

VII. CONCLUSION

In this paper, we propose an innovative scheme employing OFDM pilot signals in ISAC with multiple BSs for effective EM property sensing and material identification. The proposed framework not only facilitates the precise estimation of RPCD but also enhances material classification through a collaborative network approach. Key contributions of the proposed framework include the establishment of a comprehensive EM property sensing mechanism in ISAC with multiple BSs, the implementation of a feature-level multi-BS data fusion strategy to optimize EM property reconstruction, and the strategic design of multi-subcarrier pilots to minimize column mutual coherence. The simulation outcomes demonstrate the

efficacy of the proposed framework, highlighting its capability to achieve high-quality RPCD reconstruction and accurate material classification. Additionally, the simulation results suggest that the reconstruction quality and classification accuracy can be significantly improved by optimizing the SNR at the receivers or by expanding the number of BSs involved in data collection.

REFERENCES

- [1] M. Hua, Q. Wu, W. Chen, O. A. Dobre, and A. L. Swindlehurst, "Secure intelligent reflecting surface-aided integrated sensing and communication," *IEEE Trans. Wireless Commun.*, vol. 23, no. 1, pp. 575–591, Jan. 2024.
- [2] Q. Zhang, H. Sun, X. Gao, X. Wang, and Z. Feng, "Time-division ISAC enabled connected automated vehicles cooperation algorithm design and performance evaluation," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 7, pp. 2206–2218, 2022.
- [3] X. Cheng, D. Duan, S. Gao, and L. Yang, "Integrated sensing and communications (ISAC) for vehicular communication networks (VCN)," *IEEE Internet Things J.*, vol. 9, no. 23, pp. 23441–23451, 2022.
- [4] F. Gao, L. Xu, and S. Ma, "Integrated sensing and communications with joint beam-squint and beam-split for mmwave/thz massive mimo," *IEEE Trans. Commun.*, Apr. 2023.
- [5] Z. Ren, Y. Peng, X. Song, Y. Fang, L. Qiu, L. Liu, D. W. K. Ng, and J. Xu, "Fundamental CRB-rate tradeoff in multi-antenna ISAC systems with information multicasting and multi-target sensing," *IEEE Trans. Wireless Commun.*, 2023.
- [6] Y. Jiang, F. Gao, Y. Liu, S. Jin, and T. Cui, "Near-field computational imaging with RIS generated virtual masks," *IEEE Trans. Antennas Propag.*, vol. 72, no. 5, pp. 4383–4398, Apr. 2024.
- [7] F. Dong, F. Liu, Y. Cui, W. Wang, K. Han, and Z. Wang, "Sensing as a service in 6G perceptive networks: A unified framework for ISAC resource allocation," *IEEE Trans. Wireless Commun.*, 2022.
- [8] M. Hua, Q. Wu, W. Chen, Z. Fei, H. C. So, and C. Yuen, "Intelligent reflecting surface-assisted localization: Performance analysis and algorithm design," *IEEE Wireless Commun. Lett.*, vol. 13, no. 1, pp. 84–88, Jan. 2024.
- [9] N. Su, F. Liu, and C. Masouros, "Sensing-assisted eavesdropper estimation: An ISAC breakthrough in physical layer security," *IEEE Trans. Wireless Commun.*, 2023.
- [10] K. Chen, C. Qi, O. A. Dobre, and G. Y. Li, "Simultaneous beam training and target sensing in ISAC systems with RIS," *IEEE Trans. Wireless Commun.*, 2023.
- [11] Z. He, W. Xu, H. Shen, D. W. K. Ng, Y. C. Eldar, and X. You, "Full-duplex communication for ISAC: Joint beamforming and power optimization," *IEEE J. Sel. Areas Commun.*, 2023.
- [12] S. Li, W. Yuan, C. Liu, Z. Wei, J. Yuan, B. Bai, and D. W. K. Ng, "A novel ISAC transmission framework based on spatially-spread orthogonal time frequency space modulation," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 6, pp. 1854–1872, 2022.
- [13] D. Xu, Y. Xu, X. Zhang, X. Yu, S. Song, and R. Schober, "Interference mitigation for network-level ISAC: An optimization perspective," *arXiv preprint arXiv:2402.09974*, 2024.
- [14] K. Meng, C. Masouros, G. Chen, and F. Liu, "BS coordination optimization in integrated sensing and communication: A stochastic geometric view," *arXiv preprint arXiv:2401.04918*, 2024.
- [15] N. Babu, C. Masouros, C. B. Papadias, and Y. C. Eldar, "Precoding for multi-cell ISAC: from coordinated beamforming to coordinated multipoint and bi-static sensing," *arXiv preprint arXiv:2402.18387*, 2024.
- [16] Y. Huang, Y. Fang, X. Li, and J. Xu, "Coordinated power control for network integrated sensing and communication," *IEEE Trans. Vehi. Tech.*, vol. 71, no. 12, pp. 13361–13365, 2022.
- [17] K. Meng and C. Masouros, "Cooperative sensing and communication for ISAC networks: Performance analysis and optimization," *arXiv preprint arXiv:2403.20228*, 2024.
- [18] G. Cheng, Y. Fang, J. Xu, and D. W. K. Ng, "Optimal coordinated transmit beamforming for networked integrated sensing and communications," *IEEE Trans. Wireless Commun.*, 2024.
- [19] M. Liu, M. Yang, H. Li, K. Zeng, Z. Zhang, A. Nallanathan, G. Wang, and L. Hanzo, "Performance analysis and power allocation for cooperative ISAC networks," *IEEE Internet Things J.*, vol. 10, no. 7, pp. 6336–6351, 2022.

- [20] Z. Wei, W. Jiang, Z. Feng, H. Wu, N. Zhang, K. Han, R. Xu, and P. Zhang, "Integrated sensing and communication enabled multiple base stations cooperative sensing towards 6G," *IEEE Network*, 2023.
- [21] D. Xu, C. Liu, S. Song, and D. W. K. Ng, "Integrated sensing and communication in coordinated cellular networks," in *2023 IEEE Statistical Signal Processing Workshop (SSP)*, pp. 90–94, IEEE, 2023.
- [22] R. Thomä and T. Dallmann, "Distributed ISAC systems—multisensor radio access and coordination," in *2023 20th European Radar Conference (EuRAD)*, pp. 351–354, IEEE, 2023.
- [23] A. Alkhateeb, S. Jiang, and G. Charan, "Real-time digital twins: Vision and research directions for 6G and beyond," *IEEE Communications Magazine*, 2023.
- [24] Y. Cui, W. Yuan, Z. Zhang, J. Mu, and X. Li, "On the physical layer of digital twin: An integrated sensing and communications perspective," *IEEE J. Sel. Areas Commun.*, 2023.
- [25] W. Großmann, H. Horn, and O. Niggemann, "Improving remote material classification ability with thermal imagery," *Scientific Reports*, vol. 12, no. 1, p. 17288, 2022.
- [26] J. L. Miller, *Principles of infrared technology*. Dordrecht, Kluwer: Springer, 1994.
- [27] H. Shanbhag, S. Madani, A. Isanaka, D. Nair, S. Gupta, and H. Hossain, *Contactless Material Identification with Millimeter Wave Vibrometry*. MobiSys '23, New York, NY, USA: Association for Computing Machinery, 2023.
- [28] P. Gao, L. Lian, and J. Yu, "Cooperative ISAC with direct localization and rate-splitting multiple access communication: A pareto optimization framework," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 5, pp. 1496–1515, 2023.
- [29] X. Meng, F. Liu, C. Masouros, W. Yuan, Q. Zhang, and Z. Feng, "Vehicular connectivity on complex trajectories: Roadway-geometry aware ISAC beam-tracking," *IEEE Trans. Wireless Commun.*, 2023.
- [30] Y. Tao and Z. Zhang, "Distributed computational imaging with reconfigurable intelligent surface," in *2020 International Conference on Wireless Communications and Signal Processing (WCSP)*, pp. 448–454, Oct. 2020.
- [31] Y. Jiang, F. Gao, M. Jian, S. Zhang, and W. Zhang, "Reconfigurable intelligent surface for near field communications: Beamforming and sensing," *IEEE Trans. Wireless Commun.*, vol. 22, no. 5, pp. 3447–3459, 2023.
- [32] Y. Jiang, F. Gao, and S. Jin, "Electromagnetic property sensing: A new paradigm of integrated sensing and communication," 2024. arXiv:2312.16428.
- [33] R. Liu, M. Jian, D. Chen, X. Lin, Y. Cheng, W. Cheng, and S. Chen, "Integrated sensing and communication based outdoor multi-target detection, tracking, and localization in practical 5g networks," *Intelligent and Converged Networks*, vol. 4, no. 3, pp. 261–272, 2023.
- [34] J. O. Vargas and R. Adriano, "Subspace-based conjugate-gradient method for solving inverse scattering problems," *IEEE Trans. Antennas Propag.*, vol. 70, no. 12, pp. 12139–12146, 2022.
- [35] T.-F. Wei, X.-H. Wang, L. Wang, Z. Feng, and B.-Z. Wang, "Efficient born iterative method for inverse scattering based on modified forward-solver," *IEEE Access*, vol. 8, pp. 229101–229107, 2020.
- [36] N. Zaiping, Y. Feng, Z. Yanwen, and Z. Yerong, "Variational born iteration method and its applications to hybrid inversion," *IEEE Trans. Geosci. Remote Sens.*, vol. 38, no. 4, pp. 1709–1715, 2000.
- [37] D. Tajik, R. Kazemivala, and N. K. Nikolova, "Real-time imaging with simultaneous use of Born and Rytov approximations in quantitative microwave holography," *IEEE Trans. Microw. Theory Tech.*, vol. 70, no. 3, pp. 1896–1909, 2021.
- [38] J. Guillemeotau, P. Sailhac, and M. Behaegel, "Fast approximate 2D inversion of airborne tem data: Born approximation and empirical approach," *Geophysics*, vol. 77, no. 4, pp. WB89–WB97, 2012.
- [39] F.-F. Wang and Q. H. Liu, "A hybrid Born iterative Bayesian inversion method for electromagnetic imaging of moderate-contrast scatterers with piecewise homogeneities," *IEEE Trans. Antennas Propag.*, vol. 70, no. 10, pp. 9652–9661, 2022.
- [40] A. Amirkhani and A. H. Barshooi, "Consensus in multi-agent systems: a review," *Artificial Intelligence Review*, vol. 55, no. 5, pp. 3897–3935, 2022.
- [41] V. Sridhar, X. Wang, G. T. Buzzard, and C. A. Bouman, "Distributed iterative ct reconstruction using multi-agent consensus equilibrium," *IEEE Transactions on Computational Imaging*, vol. 6, pp. 1153–1166, 2020.
- [42] N. Parikh and S. Boyd, *Proximal Algorithms*. Hanover, MA, USA: Foundations and Trends, 2014.
- [43] B. Kilic, A. Gngr, M. Kalfa, and O. Arkan, "Adaptive measurement matrix design in direction of arrival estimation," *IEEE Trans. Signal Process.*, vol. 70, pp. 4742–4756, 2022.
- [44] T. Huang, Y. Liu, H. Meng, and X. Wang, "Adaptive compressed sensing via minimizing crammerao bound," *IEEE Signal Process. Lett.*, vol. 21, no. 3, pp. 270–274, 2014.
- [45] R. Burckel and R. Remmert, *Theory of Complex Functions*. Graduate Texts in Mathematics / Readings in Mathematics, Springer New York, 1999.
- [46] D. Deng, "DBSCAN clustering algorithm based on density," in *2020 7th international forum on electrical engineering and automation (IFEAA)*, pp. 949–953, IEEE, 2020.
- [47] A. Starczewski, P. Goetzen, and M. J. Er, "A new method for automatic determining of the DBSCAN parameters," *Journal of Artificial Intelligence and Soft Computing Research*, vol. 10, no. 3, pp. 209–221, 2020.
- [48] E. Bayram and V. Nabiyev, "Image segmentation by using k-means clustering algorithm in euclidean and mahalanobis distance calculation in camouflage images," in *2020 28th Signal Processing and Communications Applications Conference (SIU)*, pp. 1–4, IEEE, 2020.
- [49] N. Gholizadeh, H. Saadatfar, and N. Hanafi, "K-DBSCAN: An improved DBSCAN algorithm for big data," *The Journal of supercomputing*, vol. 77, no. 6, pp. 6214–6235, 2021.
- [50] S. Weng, J. Gou, and Z. Fan, "h-DBSCAN: A simple fast DBSCAN algorithm for big data," in *Asian Conference on Machine Learning*, pp. 81–96, PMLR, 2021.