

Data Reduction for Graph Coloring Problems^{☆,☆☆}

Bart M. P. Jansen^{a,*}, Stefan Kratsch^{b,1}

^a*Utrecht University, P.O. Box 80.089, 3508 TB Utrecht, The Netherlands*

^b*Technical University Berlin, Germany*

Abstract

This paper studies the kernelization complexity of graph coloring problems with respect to certain structural parameterizations of the input instances. We are interested in how well polynomial-time data reduction can provably shrink instances of coloring problems, in terms of the chosen parameter. It is well known that deciding 3-colorability is already NP-complete, hence parameterizing by the requested number of colors is not fruitful. Instead, we pick up on a research thread initiated by Cai (DAM, 2003) who studied coloring problems parameterized by the modification distance of the input graph to a graph class on which coloring is polynomial-time solvable; for example parameterizing by the number k of vertex-deletions needed to make the graph chordal. We obtain various upper and lower bounds for kernels of such parameterizations of q -COLORING, complementing Cai’s study of the time complexity with respect to these parameters. Our results show that the existence of polynomial kernels for q -COLORING parameterized by the vertex-deletion distance to a graph class \mathcal{F} is strongly related to the existence of a function $f(q)$ which bounds the number of vertices which are needed to preserve the NO-answer to an instance of q -LIST COLORING on \mathcal{F} .

Keywords: graph coloring, polynomial kernels, structural parameterizations
2010 MSC: 05C15,05C85,68R10,68W05

1. Introduction

Graph coloring is one of the most well-studied and well-known topics in graph algorithmics and discrete mathematics; it hardly needs an introduction.

[☆]This work was supported by the Netherlands Organization for Scientific Research (NWO), project “KERNELS: Combinatorial Analysis of Data Reduction”.

^{☆☆}A preliminary version of this work appeared in the proceedings of the 18th International Symposium on Fundamentals of Computation Theory (FCT 2011). In addition to complete proofs, this full version contains several new results as explained in the introduction.

*Corresponding author

Email addresses: B.M.P.Jansen@uu.nl (Bart M. P. Jansen),
Stefan.Kratsch@tu-berlin.de (Stefan Kratsch)

¹Research done while at Utrecht University.

In this work we study the kernelization complexity of graph coloring problems, or in other words the existence of efficient and provably effective preprocessing procedures, using the framework of parameterized complexity [1, 2] (consult Section 2 for full definitions). Parameterized complexity enables us to study qualitatively and quantitatively how different properties of a graph coloring instance contribute to its difficulty.

The choice of parameter is therefore very important. If we consider the vertex coloring problem and parameterize by the requested number of colors, then this problem is already NP-complete for a constant value of 3 for the parameter [3, GT4], resulting in intractability; we should consider different parameterizations to obtain meaningful questions. In his study of the parameterized complexity of vertex coloring problems, Leizhen Cai [4] introduced a convenient notation to talk about *structural* parameterizations of graph problems. For a graph class \mathcal{F} let $\mathcal{F} + kv$ denote the graphs which can be built by adding at most k vertices to a graph in \mathcal{F} ; the neighborhoods of these new vertices can be arbitrary. Equivalently the class $\mathcal{F} + kv$ contains those graphs which contain a *modulator* $X \subseteq V(G)$ of size at most k such that $G - X \in \mathcal{F}$. Hence FOREST $+ kv$ is exactly the class of graphs which have a feedback vertex set of size at most k . Similarly one may define classes $\mathcal{F} + ke$ and $\mathcal{F} - ke$ where the structure is measured through the number of *edges* which were added or removed from a member of \mathcal{F} to build the graph. Using this notation we can define a class of parameterized coloring problems with structural parameters.

q -COLORING ON $\mathcal{F} + kv$ GRAPHS

Input: An undirected graph G and a modulator $X \subseteq V(G)$ such that $G - X \in \mathcal{F}$.

Parameter: The size $k := |X|$ of the modulator.

Question: Is $\chi(G) \leq q$?

To decouple the existence of polynomial kernelizations from the difficulties of *finding* a modulator, we assume that a modulator is given in the input. The CHROMATIC NUMBER ON $\mathcal{F} + kv$ graphs problem is defined similarly as q -COLORING, with the important exception that the value q is not fixed, but part of the input. For the purposes of kernelization, however, there is little left to explore for CHROMATIC NUMBER: a superset of the authors showed [5, Theorem 14] that CHROMATIC NUMBER does not admit a polynomial kernel when parameterized by the vertex cover number, or in Cai's notation: CHROMATIC NUMBER ON INDEPENDENT $+ kv$ graphs does not admit a polynomial kernel, unless $\text{NP} \subseteq \text{coNP}/\text{poly}$ and the polynomial hierarchy collapses to the third level [6] ($\text{PH} = \Sigma_3^P$). The proof given in that paper shows that even a compound parameterization by the vertex cover number *plus* the number of colors that is asked for, does not admit a polynomial kernel. Hence it seems that the size of the kernel must depend super-polynomially on the number of colors. In this work we therefore focus on q -COLORING and consider how the structural parameterizations influence the complexity of the problem when keeping the number of colors q *fixed*.

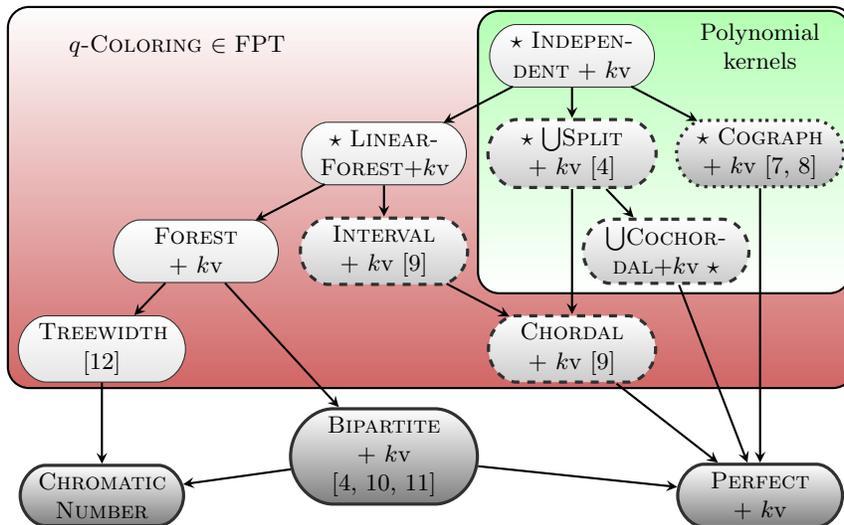


Figure 1: The hierarchy of parameters used in this work. Arrows point from larger parameters to smaller parameters: an arc $P \rightarrow P'$ signifies that every graph G satisfies $P(G) + 2 \geq P'(G)$. For parameters with a star we obtain new parameterized complexity results in this work. The complexity of the CHROMATIC NUMBER problem for a given parameterization is expressed through the shading and border style of the parameters: the complexity status can be NP-complete for fixed k (solid oval), or contained in XP but not known to be W[1]-hard (dashed oval), or contained in XP and W[1]-hard (dashed oval), or FPT but without polynomial kernel unless $\text{NP} \subseteq \text{coNP/poly}$ (solid oval). The complexity of q -COLORING for a given parameterization is expressed through the containers: the status is either FPT with a polynomial kernel, FPT but no polynomial kernel unless $\text{NP} \subseteq \text{coNP/poly}$, or NP-complete for fixed k .

When studying coloring problems with these structural parameterizations, we feel that it is important to look at the relations between the parameters and consider the parameter space as a *hierarchy* (Fig. 1), rather than exploring a table of problems versus parameters one row at a time (cf. [13]). It is known that there are several coloring problems such as PRECOLORING EXTENSION and EQUITABLE COLORING which are W[1]-hard when parameterized by treewidth, but fixed-parameter tractable parameterized by the vertex cover number [14, 15]. These parameters also yield differences in the *kernelization complexity* of q -COLORING. Our hierarchy includes these parameters, and several others which are sandwiched between them.

Our results. In this paper we pinpoint the boundary for polynomial kernelizability of q -COLORING in the given hierarchy, by exhibiting upper- and lower bounds for kernel sizes. For all parameters in Fig. 1 for which q -COLORING is in FPT we either give a polynomial kernel, or prove that the existence of such a kernel would imply $\text{NP} \subseteq \text{coNP/poly}$ and is therefore unlikely.

Upper bounds in the hierarchy. We derive a general theorem which associates the existence of polynomial kernels for q -COLORING on $\mathcal{F} + kv$ graphs to properties of the q -LIST COLORING problem on graphs in \mathcal{F} : if the non-list-colorability

of a graph in \mathcal{F} is “local” in the sense that for any NO-instance there is a small subinstance on $g(q)$ vertices to which the answer is NO, then q -COLORING on $\mathcal{F} + kv$ graphs admits a polynomial kernel with $\mathcal{O}(k^{q \cdot g(q)})$ vertices for every fixed q . This positive news even extends to the q -LIST COLORING problem with structural parameterizations. We apply the general theorem to give polynomial kernels for q -COLORING on the parameterized graph families COGRAPH + kv and \bigcup COCHORDAL + kv . The latter is a strict generalization of a result of the preliminary version, where we obtained kernels on \bigcup SPLIT + kv graphs: observe that \bigcup SPLIT graphs, the unions of split graphs, are contained in the class \bigcup COCHORDAL, the unions of cochordal graphs, since the complement of every split graph is chordal.

Lower bounds in the hierarchy. In the seminal paper on kernelization lower-bounds, Bodlaender et al. [16, Theorem 2] prove that 3-COLORING parameterized by treewidth does not admit a polynomial kernel unless all coNP-complete problems have distillation algorithms. We strengthen their result by showing that unless $\text{NP} \subseteq \text{coNP/poly}$ (an even less likely condition), the problem does not even admit a polynomial kernel parameterized by vertex-deletion distance to a single path: 3-COLORING on PATH + kv graphs does not admit a polynomial kernel. Under the same assumption, this immediately excludes polynomial kernels on e.g. FOREST + kv or INTERVAL + kv graphs, since the latter are *smaller* parameters.

Besides investigating the *existence* of polynomial kernels, we also study the *degree* of the polynomial in the kernels that we obtain for q -COLORING on $\mathcal{F} + kv$ graphs. Our general scheme yields kernels with $\mathcal{O}(k^q)$ vertices on INDEPENDENT + kv graphs, and a small insight allows us to encode these instances in $\mathcal{O}(k^q)$ bits. Using a connection to NOT-ALL-EQUAL q -SATISFIABILITY (q -NAE-SAT) we prove that for every $q \geq 4$ the q -COLORING problem parameterized by vertex cover does not admit a kernel which can be encoded in $\mathcal{O}(k^{q-1-\varepsilon})$ bits for any $\varepsilon > 0$ unless $\text{NP} \subseteq \text{coNP/poly}$.

As a new result in this full version we show that the properties of NO-instances to q -LIST COLORING on graphs from \mathcal{F} cannot just be used to obtain kernel size *upper bounds* for q -COLORING on $\mathcal{F} + kv$ graphs, but also *lower bounds*. We prove that if there is a NO-instance of $(q-2)$ -LIST COLORING on t vertices which is irreducible in the sense that any vertex-deletion turns it into a YES-instance, then kernels for q -COLORING on $\mathcal{F} + kv$ graphs cannot have bitsize $\mathcal{O}(k^{t-\varepsilon})$ for any $\varepsilon > 0$ unless $\text{NP} \subseteq \text{coNP/poly}$. This theorem explains why the number of vertices in our general kernelization scheme must depend on the function $g(q)$ in its exponent.

Domination-related parameters. It turns out that the difficulty of a 3-COLORING instance is intimately related to the domination-properties of the graph. We show the surprising (but not difficult) result that 3-COLORING on a general graph G can be solved in $\mathcal{O}^*(3^k)$ time when a dominating set X of size k is given along with the input. In contrast we show that 3-COLORING parameterized by the size of a dominating set does not admit a polynomial kernel unless $\text{NP} \subseteq \text{coNP/poly}$. To obtain polynomial kernels by exploiting the domination structure of the graph, we must consider another parameter. Let DOMINATED

be the graphs where each connected component has a dominating vertex. We show that 3-COLORING on DOMINATED+ kv graphs admits a polynomial kernel. This cannot be extended to arbitrary q , since 4-COLORING is NP-complete on DOMINATED graphs.

Related work. Structural parameterizations of graph coloring problems were first studied by Cai [4] who showed, amongst others, that CHROMATIC NUMBER is in FPT on CHORDAL- ke , SPLIT+ ke , and SPLIT- ke graphs, but W[1]-hard on SPLIT+ kv graphs, and that 3-COLORING on BIPARTITE+ kv and BIPARTITE+ ke graphs is NP-complete for constant values of k . Marx [9] continued this line of research and showed e.g. that CHROMATIC NUMBER on INTERVAL+ kv and CHORDAL+ kv graphs is in XP but W[1]-hard, and that CHROMATIC NUMBER on CHORDAL+ ke graphs is in FPT. A summary of their results relevant to this work can be found in Fig. 1. Chor, Fellows, and Juedes [17] considered the problem of coloring a graph on n vertices with $n-k$ colors and obtained an FPT algorithm. They also showed that the problem of covering the vertices of a graph with $n-k$ cliques has a kernel with $3k$ vertices. Using the fact that CHROMATIC NUMBER on COMPLETE+ kv graphs is equivalent to partitioning the complement graph into cliques parameterized by vertex cover, and that a graph G with vertex cover of size k needs at least $n-k$ cliques to cover it, their result implies that CHROMATIC NUMBER on COMPLETE+ kv graphs has a linear-vertex kernel. Finally we observe that the q -COLORING problem on INTERVAL+ kv and CHORDAL+ kv graphs is in FPT, using the fact that either the interval- or chordal graph $G-X$ contains a clique of size $q+1$ and the answer is NO, or the treewidth of G is at most $k+q$. An algorithm to solve CHROMATIC NUMBER on \bigcup CHORDAL+ kv graphs in XP-time can be obtained using the ideas of Lemma 3.

Organization. The outline of the paper follows the description of our results. We give preliminaries on parameterized complexity and graph theory in Section 2. Positive results related to the hierarchy are established in Section 3, by first deriving general theorems in Section 3.1 and then establishing upper bounds on the sizes of NO-certificates for q -LIST COLORING in Section 3.2 to use in these theorems. In Section 4 we focus on negative results in the parameter hierarchy, giving lower bounds for important parameterizations in Section 4.1, finishing with a general negative theorem which is applied using the lower bound constructions for sizes of NO-certificates which are developed in Section 4.2. We treat parameterizations related to the domination-structure of the graph in Section 5.

2. Preliminaries

Parameterized complexity and kernels. A parameterized problem Q is a subset of $\Sigma^* \times \mathbb{N}$, the second component being the *parameter* which expresses some structural measure of the input. A parameterized problem is (strongly uniform) *fixed-parameter tractable* if there exists an algorithm to decide whether $(x, k) \in Q$ in time $f(k)|x|^{\mathcal{O}(1)}$ where f is a computable function.

A *kernelization algorithm* (or *kernel*) for a parameterized problem Q is a polynomial-time algorithm which transforms an instance (x, k) into an equivalent instance (x', k') such that $|x'|, k' \leq f(k)$ for some computable function f , which is the *size* of the kernel. If $f \in k^{\mathcal{O}(1)}$ is a polynomial then this is a *polynomial kernel*. Intuitively a polynomial kernel for a parameterized problem is a polynomial-time preprocessing procedure which reduces the size of an instance to something which *only* depends (polynomially) on the parameter k , and does not depend at all on the input size $|x|$.

Definition 1 (cf. [18]). Let P and Q be parameterized problems. We say that P is *polynomial-parameter reducible* to Q , written $P \leq_{ptp} Q$, if there exists a polynomial time computable function $f: \Sigma^* \times \mathbb{N} \rightarrow \Sigma^* \times \mathbb{N}$, and a polynomial $p: \mathbb{N} \rightarrow \mathbb{N}$ such that for all $(x, k) \in \Sigma^* \times \mathbb{N}$ it holds that (a) $(x, k) \in P$ if and only if $(x', k') = f(x, k) \in Q$ and (b) $k' \leq p(k)$. The function f is called a *polynomial-parameter transformation*. In the special case that p is a linear function we have a *linear-parameter transformation*.

Under a mild technical assumption which is satisfied by all applications in this work, a polynomial-parameter transformation from P to Q , together with a polynomial kernel for Q , yields a polynomial kernel for P [18]. Using contraposition this can be exploited to give kernel lower-bounds for Q based on lower-bounds for P . We also use a compression lower-bound for q -CNF-SAT due to Dell and van Melkebeek, who built on a theorem by Fortnow and Santhanam [19]. Although the result [20, Theorem 1] was originally phrased in terms of an oracle communication protocol, we only need the following weaker statement.

Proposition 1 ([20]). *If $NP \not\subseteq coNP/poly$ then for any $\varepsilon > 0$ and $q \geq 3$ there is no polynomial-time algorithm which transforms an instance x of q -CNF-SAT on n variables into an equivalent instance x' of a decidable problem with bitsize $|x'| \in \mathcal{O}(n^{q-\varepsilon})$.*

We also use the following corollary to this statement.

Proposition 2 ([20]). *CNF-SAT parameterized by the number of variables does not admit a polynomial kernel unless $NP \subseteq coNP/poly$.*

Graphs. All graphs we consider are finite, undirected and simple. We use $V(G)$ and $E(G)$ to denote the vertex- and edge set of a graph G . For $X \subseteq V(G)$ the subgraph induced by X is denoted by $G[X]$. The terms P_n , C_n , and K_n denote the path, cycle, and complete graphs on n vertices, respectively. For natural numbers q we define $[q] := \{1, 2, \dots, q\}$. A proper q -coloring of a graph G is a function $f: V(G) \rightarrow [q]$ such that adjacent vertices receive different colors. The *chromatic number* $\chi(G)$ of a graph is the smallest number q for which it has a proper q -coloring. For a vertex set $X \subseteq V(G)$ we denote by $G - X$ the graph obtained from G by deleting all vertices of X and their incident edges. An odd cycle is a simple cycle on an odd number of at least three vertices. An odd wheel is the graph which is obtained from an odd cycle by adding a new

vertex which is adjacent to all other vertices. A *diamond* is the graph obtained from K_4 by deleting a single edge; every edge yields the same result. A vertex v in a graph G is *simplicial* if $N_G(v)$ is a clique. If v is contained in the connected component C , then v is a *dominating vertex* for C if $N_G[v] = V(C)$. The *edge-complement* \overline{G} of a graph G has the same vertex set as G , with an edge between two vertices if and only if they are not adjacent in G .

The *join* of two graphs G_1 and G_2 is the graph $G_1 \otimes G_2$ on the vertex set $V(G_1) \dot{\cup} V(G_2)$ and edge set $E(G_1) \dot{\cup} E(G_2) \dot{\cup} \{\{x, y\} \mid x \in V(G_1) \wedge y \in V(G_2)\}$. The *union* of G_1 and G_2 is the graph $G_1 \cup G_2$ with vertices $V(G_1) \dot{\cup} V(G_2)$ and edges $E(G_1) \dot{\cup} E(G_2)$.

A *graph class* is a (possibly infinite) set of graphs. A graph class is *hereditary* if the class is closed under taking vertex-induced subgraphs. A graph G with $E(G) = \emptyset$ is called an *independent* graph. A graph is a *split graph* if there is a partition of $V(G)$ into sets X, Y such that X is a clique and Y is an independent set. We define the class JSPLIT containing all disjoint-unions of split graphs. A graph is a *cograph* if it does not contain P_4 as an induced subgraph. A graph is *chordal* if every cycle of length at least four has a chord, i.e., an edge between two vertices that are not successive on the cycle. A *cochordal* graph is the edge-complement of a chordal graph, and JCOCHORDAL is the class of graphs in which each connected component is cochordal. A *linear forest* is a disjoint union of paths. The book by Brandstädt, Le, and Spinrad [21] contains more information about the graph classes used in this work.

For a finite set X and non-negative integer i we write $\binom{X}{i}$ for the collection of all size- i subsets of X , $\binom{X}{\leq i}$ for all size *at most* i subsets of X , and X^i for the Cartesian product of i copies of X .

Definition 2. A *cotree* \mathcal{T} is a rooted proper binary tree whose internal vertices are labeled as JOIN or UNION nodes. For $v \in V(\mathcal{T})$ the graph $\text{CG}(\mathcal{T}, v)$ represented by the subtree of \mathcal{T} rooted at v is defined as follows:

$$\text{CG}(\mathcal{T}, v) := \begin{cases} \text{Graph } G := (\{v\}, \emptyset) & \text{If } v \text{ is a leaf.} \\ \text{CG}(\mathcal{T}, \text{LEFT}(v)) \cup \text{CG}(\mathcal{T}, \text{RIGHT}(v)) & \text{If } v \text{ is a UNION node.} \\ \text{CG}(\mathcal{T}, \text{LEFT}(v)) \otimes \text{CG}(\mathcal{T}, \text{RIGHT}(v)) & \text{If } v \text{ is a JOIN node.} \end{cases}$$

where $\text{LEFT}(v)$ and $\text{RIGHT}(v)$ are the left- and right child of node v in the tree \mathcal{T} , respectively. We define $\text{CG}(\mathcal{T})$ as $\text{CG}(\mathcal{T}, r)$, where r is the root of \mathcal{T} , and we say that \mathcal{T} is a *cotree-representation* of the graph $\text{CG}(\mathcal{T})$. The *JOIN-height* $\text{JOINH}(\mathcal{T})$ of a cotree \mathcal{T} is the maximum number of JOIN nodes on any path from the root to a leaf.

It is well-known that a graph is a cograph if and only if it has a cotree-representation [21]. Let $\omega(G)$ denote the size of the largest clique in G . Using the fact that $\omega(G_1 \otimes G_2) = \omega(G_1) + \omega(G_2)$, it is not hard to verify the following proposition.

Proposition 3. *If \mathcal{T} is a cotree representation of G then $\omega(G) \geq \text{JOINH}(\mathcal{T}) + 1$.*

The following facts will be useful in the remainder of the paper.

Proposition 4 ([21, Chapter 1.2]). *Every chordal graph has a simplicial vertex.*

Proposition 5. *In any proper 2-coloring of a graph P_{2n} , the first and last vertex on the path must receive a different color.*

3. Positive results in the hierarchy

3.1. Kernelization upper bounds

In this section we present several positive results (i.e., polynomial kernels) for parameterizations in the considered hierarchy. We begin by giving a general theorem which proves the existence of polynomial kernels for q -COLORING on $\mathcal{F} + kv$ graphs under certain conditions on the class \mathcal{F} . In Section 3.2 we investigate which classes \mathcal{F} satisfy these conditions. We introduce some terminology related to the q -LIST COLORING problem to state the general theorem and its proof precisely.

q -LIST COLORING

Input: An undirected graph G and for each vertex $v \in V(G)$ a list $L(v) \subseteq [q]$ of allowed colors.

Question: Is there a proper q -coloring $f: V(G) \rightarrow [q]$ such that $f(v) \in L(v)$ for each $v \in V(G)$?

Observe that in our definition of q -LIST COLORING, the *total* color universe has size q and the lists can have any size. The same problem name is sometimes used for the variant in which there can be arbitrarily many colors while each list has size q , but we do not consider this variant in this work.

Let us define an instance (G', L') of q -LIST COLORING as a *subinstance* of (G, L) if G' is an induced subgraph of G and $L'(v) = L(v)$ for all $v \in V(G')$. If (G', L') is a NO-instance we say it is a NO-subinstance. The main condition on \mathcal{F} which is needed to ensure the existence of polynomial kernels for q -COLORING is captured by the following definition.

Definition 3. Let $g: \mathbb{N} \rightarrow \mathbb{N}$ be a function. Graph class \mathcal{F} has $g(q)$ -size NO-certificates for q -LIST COLORING if for all NO-instances (G, L) of q -LIST COLORING with $G \in \mathcal{F}$ there is a NO-subinstance (G', L') on at most $g(q)$ vertices.

We shall see later that such a bounding function $g(q)$ can be found for the graph classes COGRAPH, USPLIT, and UCHORDAL, whereas no such bound exists for the class of all paths. The existence of small NO-certificates for q -LIST COLORING on \mathcal{F} turns out to be intimately linked to the existence of polynomial kernels for q -COLORING on $\mathcal{F} + kv$ graphs, as is shown in the following theorem.

Theorem 1. *Let \mathcal{F} be a hereditary class of graphs with $g(q)$ -size NO-certificates for q -LIST COLORING. The q -COLORING problem on $\mathcal{F} + kv$ graphs admits a polynomial kernel with $\mathcal{O}(k^{q \cdot g(q)})$ vertices for every fixed q .*

Proof. Consider an instance (G, X) of q -COLORING on a graph class $\mathcal{F} + kv$ which satisfies the stated requirements. We give an outline of the reduction algorithm.

1. **For each** undirected graph H on $t \leq g(q)$ vertices $\{h_1, \dots, h_t\}$, do:

For each tuple $(S_1, \dots, S_t) \in \binom{[t]}{\leq q}$, do:

If there is an induced subgraph of $G - X$ on vertices $\{v_1, \dots, v_t\}$ which is isomorphic to H by the mapping $h_i \mapsto v_i$, and $S_i \subseteq N_G(v_i)$ for $i \in [t]$, then mark the vertices $\{v_1, \dots, v_t\}$ as *important* for *one* such subgraph, which can be chosen arbitrarily.

2. Let Y contain all vertices of $G - X$ which were marked as important, and output the instance (G', X) with $G' := G[X \cup Y]$.

Let us verify that this procedure can be executed in polynomial time for fixed q , and leads to a reduced instance of the correct size. The number of undirected graphs on $g(q)$ vertices is constant for fixed q . The number of considered tuples is bounded by $\mathcal{O}((q|X|^q)^{g(q)})$, and for each graph H , for each tuple, we mark at most $g(q)$ vertices which is a constant. These observations imply that the algorithm outputs an instance of the appropriate size, and that it can be made to run in polynomial time for fixed q because we can just try all possible isomorphisms by brute-force. Since $G' - X$ is an induced subgraph of $G - X$, it follows that $G' - X \in \mathcal{F}$ because \mathcal{F} is hereditary. It remains to prove that the two instances are equivalent: $\chi(G) \leq q \Leftrightarrow \chi(G') \leq q$. The forward direction of this equivalence is trivial, since G' is a subgraph of G . We now prove the reverse direction.

Assume that $\chi(G') \leq q$ and let $f': V(G') \rightarrow [q]$ be a proper q -coloring of G' . Obtain a partial q -coloring f of G by copying the coloring of f' on the vertices of X . Since $G'[X] = G[X]$ the function f is a proper partial q -coloring of G , which assigns all vertices of X a color. We will prove that f can be extended to a proper q -coloring of G , using an argument about list-coloring. Consider the graph $H := G - X$ which contains exactly the vertices of G which are not yet colored by f . For each vertex $v \in V(H)$ define a list of allowed colors as $L(v) := [q] \setminus \{f(u) \mid u \in N_G(v)\}$, i.e. for every vertex we allow the colors which are not yet used on a colored neighbor in G . From this construction it is easy to see that any proper q -list-coloring of the instance (H, L) gives a valid way to augment f to a proper q -coloring of all vertices of G . Hence it remains to prove that (H, L) is a YES-instance of q -LIST COLORING.

Assume for a contradiction that (H, L) is a NO-instance. Since the problem definition ensures that $H = G - X \in \mathcal{F}$ the assumptions on \mathcal{F} imply there is a NO-subinstance (H', L') on $t \leq g(q)$ vertices.

Let the vertices of H' be h_1, \dots, h_t . Since (H', L') is a subinstance of (H, L) we know by construction of the latter that for every vertex h_i with $i \in [t]$ and for every color $j \in [q] \setminus L'(h_i)$ there is a vertex of $N_G(h_i)$ which is colored with j . Now choose sets S_1, \dots, S_t such that for every $j \in [q] \setminus L'(h_i)$ set S_i contains exactly one neighbor $v \in N_G(h_i)$ with $f(v) = j$, which is possible by the previous observation. Since f only colors vertices from X we have $S_i \subseteq X$ for all $i \in [t]$.

Because H' is an induced subgraph on at most $g(q)$ vertices of $H = G - X$, we must have considered graph H' during the outer loop of the reduction al-

gorithm. Since each S_i contains at most q vertices from X , we must have considered the tuple (S_1, \dots, S_t) during the inner loop of the reduction algorithm, and because the existence of H' shows that there is at least one induced subgraph of $G - X$ which satisfies the if-condition, we must have marked some vertices $\{v_1, \dots, v_t\}$ of an induced subgraph H^* of $G - X$ isomorphic to H' by an isomorphism $v_i \mapsto h_i$ as *important*, and hence the induced subgraph H^* is contained in the graph G' . Recall that f' is a proper q -coloring of G' , and that f and f' assign the same colors to vertices of X . By construction this shows that for each vertex h_i with $i \in [t]$ of the presumed NO-subinstance (H', L') of q -LIST COLORING, for each color $j \in [q] \setminus L'(h_i)$ which is not on the list of h_i , there is a neighbor of the corresponding vertex v_i (i.e. a vertex in $N_{G'}(v_i)$) which is colored j . Using the fact that H^* is isomorphic to H' we obtain a valid q -list-coloring of H' by using the colors assigned to H^* by f' . But this shows that (H', L') is in fact a YES-instance of q -LIST COLORING, which contradicts our initial assumption. This proves that the instance (H, L) of q -LIST COLORING that we created must be a YES-instance, and by our earlier observations this implies that $\chi(G) \leq q$, which concludes the proof of the equivalence of the input- and output instance.

Hence we have shown that for each fixed q there is a polynomial-time algorithm which transforms an input of q -COLORING on $\mathcal{F} + kv$ graphs into an equivalent instance of size bounded polynomially in $k = |X|$, which concludes the proof. \square

As an example application of Theorem 1, observe that a NO-instance of q -LIST COLORING on an independent graph has an induced NO-subinstance on a single vertex: as there are no edges, a NO-instance must have a vertex with an empty list. Since graphs without edges are hereditary, the proof of Theorem 1 gives the following corollary.

Corollary 1. *q -COLORING on INDEPENDENT + kv graphs (i.e. parameterized by vertex cover) admits a polynomial kernel with $\mathcal{O}(k^q)$ vertices for every fixed integer q .*

While most kernels with $\mathcal{O}(k^q)$ vertices require $\Omega(k^{q+1})$ bits to represent (as the number of edges can be quadratic in the number of vertices), we can prove that a kernel for q -COLORING on INDEPENDENT + kv graphs exists that can be encoded in $\mathcal{O}(k^q)$ bits.

Lemma 1. *For every fixed $q \geq 3$, q -COLORING on INDEPENDENT + kv graphs (i.e. parameterized by vertex cover) admits a kernel with $k + k^q$ vertices that can be encoded in $\mathcal{O}(k^q)$ bits.*

Proof. Let (G, X) be an instance of q -COLORING on INDEPENDENT + kv graphs, which implies that X of size k is a vertex cover of G . We create an equivalent instance (G', X) as follows. Start by setting $G' := G[X]$. For every $S \in \binom{X}{q}$, if $\bigcap_{v \in S} N_G(v) \setminus X \neq \emptyset$, add a new vertex v_S to G' with $N_{G'}(v_S) := S$. Using argumentation similar to that of Theorem 1 it can be proven that (G, X) is equivalent to the instance (G', X) : from a proper q -coloring f' of G' we can

extract a proper partial q -coloring f of $G[X]$, and if f cannot be extended to the rest of G then there is a vertex in $G - X$ whose neighborhood contains all q colors; but then such a vertex also exists in G' , contradicting that f' is proper.

Observe that the graph G' consists of the vertex cover X and the independent set $G' - X$ of vertices with degree exactly q , no two vertices of which share the same open neighborhood; hence G' has at most $k + k^q$ vertices. To prove the lemma we give an efficient encoding for graphs with such a structure. We can represent the instance (G', X) in $\mathcal{O}(|X|^q) = \mathcal{O}(k^q)$ bits as follows. We store an adjacency matrix of $G'[X]$ in exactly k^2 bits. Then for every set $S \in \binom{X}{q}$ (of which there are less than k^q) we store exactly one bit, specifying whether or not there is a vertex with open neighborhood S . By fixing some ordering on the vertices of X for the adjacency matrix, and by fixing an ordering of the sets $\binom{X}{q}$, the instance can unambiguously be recovered from this encoding. Since the encoding uses less than $k^2 + k^q$ bits this concludes the proof. \square

We will investigate richer graph classes which have small NO-certificates for q -LIST COLORING in Section 3.2, and in Section 4 we shall prove that the exponential dependency on the function $g(q)$ in the kernel size bound is necessary. But first we show that the positive news of Theorem 1 does not only hold for q -COLORING, but can also be extended to q -LIST COLORING under structural parameterizations. For completeness we give a full definition of the generalized form of the problem.

q -LIST-COLORING ON $\mathcal{F} + kv$ GRAPHS

Input: An undirected graph G with for each vertex $v \in V(G)$ a list $L(v) \subseteq [q]$ of allowed colors, and a modulator $X \subseteq V(G)$ such that $G - X \in \mathcal{F}$.

Parameter: The size $k := |X|$ of the modulator.

Question: Is there a proper q -coloring $f: V(G) \rightarrow [q]$ such that $f(v) \in L(v)$ for each $v \in V(G)$?

Although the classical complexity of q -COLORING and q -LIST COLORING often differs quite significantly - for example, 3-COLORING is trivial on bipartite graphs whereas 3-LIST COLORING is NP-complete on such graphs [11, Theorem 1] - both coloring problems admit polynomial kernels when parameterized by the vertex-deletion distance to graph classes with small NO-certificates.

Corollary 2. *Let \mathcal{F} be a hereditary class of graphs with $g(q)$ -size NO-certificates for q -LIST COLORING. The q -LIST COLORING problem on $\mathcal{F} + kv$ graphs admits a polynomial kernel with $\mathcal{O}((k + q)^{g(q)})$ vertices for every fixed q .*

Proof. Given an instance (G, L, X) of q -LIST COLORING on $\mathcal{F} + kv$ graphs, we construct an equivalent instance of q -COLORING on $\mathcal{F} + (k + q)v$ graphs as follows. We build G' by adding a clique on q vertices p_1, \dots, p_q to G , and connect vertex p_i for $i \in [q]$ in graph G' to all vertices v for which $i \notin L(v)$. Since a proper q -coloring of G' assigns unique colors to each of the vertices of the clique, the adjacency of the original vertices to this clique enforces the

list requirements. By taking $X' := X \cup \{p_1, \dots, p_q\}$ as the new modulator we find that $G - X = G' - X' \in \mathcal{F}$. Hence the q -COLORING on $\mathcal{F} + (k + q)v$ graphs instance (G', X') is equivalent to the parameterized q -LIST COLORING on $\mathcal{F} + kv$ graphs instance (G, L, X) . We apply the kernelization algorithm of Theorem 1 to (G', X') and since the parameter is $|X'| = k + q$ the resulting reduced instance satisfies the claimed size bound. Afterwards we assign every vertex a full list $[q]$ to obtain the kernelized q -LIST COLORING instance. \square

For graph classes which are characterized by a finite set of forbidden induced subgraphs, such as cographs which are induced- P_4 -free, we can even drop the requirement that a modulator X is given in the input. A 4-approximation to the minimum-size modulator to a cograph can be obtained by repeatedly finding an induced P_4 and adding all its vertices to the approximate solution. We may then obtain a polynomial kernel using this approximate modulator as the set X in Theorem 1 or Corollary 2.

3.2. Upper bounds to sizes of NO-certificates for q -LIST COLORING

Having proved that an upper bound to the size of NO-certificates for q -LIST COLORING on \mathcal{F} yields polynomial kernels for coloring problems on $\mathcal{F} + kv$ graphs, we set out to study specific graph classes for which such bounds exist. We start the section by giving an illustrative example for the unions of split graphs. We then consider the more general class containing the union of chordal graphs, and conclude the section by studying cographs.

Lemma 2. *The class JSPLIT is hereditary and has $g(q) := q + 4^q$ -size NO-certificates for q -LIST COLORING.*

Proof. Since split graphs are hereditary, so are their unions. To establish the desired bound on the size of NO-certificates, consider a NO-instance (G, L) of q -LIST COLORING with $G \in \text{JSPLIT}$. If G contains a clique on $q + 1$ vertices, then the subinstance induced by this clique cannot be q -colored and is therefore a NO-subinstance to list-colorability of size $q + 1$. In the remainder we may therefore assume G contains no clique of size more than q . We show how to obtain a NO-subinstance of (G, L) on at most $q + 4^q$ vertices. We obtain our NO-subinstance by applying a cleaning rule to (G, L) which does not affect the list-colorability of the instance.

Cleaning Rule. *If (G, L) is an instance of q -LIST COLORING and there are distinct non-adjacent vertices u, v such that $N_G(u) \subseteq N_G(v)$ and $L(u) \supseteq L(v)$ then (G, L) is a YES-instance if and only if $(G - \{u\}, L)$ is a YES-instance.*

Proof. Because $(G - \{u\}, L)$ is a subinstance of (G, L) we only have to show that a list-coloring f' for $(G - \{u\}, L)$ can be transformed into a list-coloring for (G, L) . Since $N_G(u) \subseteq N_G(v)$, the color assigned to v by f' cannot occur on any neighbor of u , and by the condition $L(u) \supseteq L(v)$ this color is admissible for u . By non-adjacency of u and v it therefore follows that f' can be extended to a proper list-coloring of (G, L) , by assigning u the same color as v . \square

Now we use the cleaning rule to find a small NO-subinstance of our presumed NO-instance (G, L) . Since the rule does not change the answer to the instance, we may exhaustively apply the rule to obtain an equivalent NO-instance (G', L') . We may assume without loss of generality that G' is connected, because a graph is list-colorable if and only if each connected component is list-colorable; hence in any disconnected NO-instance there is a connected NO-subinstance. We prove that $|V(G')| \leq q + 4^q$. Because JSPLIT is hereditary and G' is connected it follows that $G' \in \text{SPLIT}$, so let $W \dot{\cup} Z \subseteq V(G')$ be a partition of the vertex set of G' such that $G'[W]$ is a clique and $G'[Z]$ is an independent set; this partition exists by the definition of a split graph. By the assumption at the beginning of the proof we know that G' contains no clique of size more than q , therefore $|W| \leq q$. Since Z is an independent set, we know that $N_{G'}(v) \subseteq W$ for all $v \in Z$. Consider some $W' \subseteq W$ and the set of vertices $S_{W'} := \{v \in Z \mid N_{G'}(v) = W'\}$. Since all vertices in $S_{W'}$ are mutually non-adjacent and have the same open neighborhood, by the fact that the cleaning rule is not applicable to (G', L') it follows that for all vertices $u, v \in S_{W'}$ we have $L(u) \not\subseteq L(v)$. In particular this shows that every subset of q can occur at most once as the list of a vertex in $S_{W'}$, which proves that $|S_{W'}| \leq 2^q$. Since all vertices in Z occur in some set $S_{W'}$ for $W' \subseteq W$ it follows that $|Z| \leq 2^{|W|} 2^q$, and since $|W| \leq q$ we find $|Z| \leq 2^{2q}$. As the vertex set of G' consists of W and Z we obtain $|V(G')| \leq q + 2^{2q} = q + 4^q$ which proves the lemma. \square

Note the unusual use of the cleaning rule in the proof of Lemma 2: although it looks like a kernelization rule for q -LIST COLORING, we use it merely to prove the *existence* of small NO-certificates for the class JSPLIT . The actual kernelization of q -COLORING on $\text{JSPLIT} + kv$ graphs implied by Theorem 1 relies only on the established property, and does not use the cleaning rule.

The next lemma shows that even the class UCOCHORDAL , which is a strict superclass of JSPLIT , has bounded-size NO-certificates for q -LIST COLORING. As the class is more general, the bounding function $g(q)$ grows faster.

Lemma 3. *The class UCOCHORDAL is hereditary and has $g(q) := (q + 1)!$ -size NO-certificates for q -LIST COLORING.*

Proof. Since chordal graphs are hereditary, so are their complements and the unions of their complements. As in the previous proof we may restrict our attention to connected graphs without loss of generality, and it therefore suffices to show that for every NO-instance of q -LIST COLORING (G, L) with $G \in \text{COCHORDAL}$, there is a NO-subinstance with at most $g(q) := (q + 1)!$ vertices.

We start by investigating the structure of an instance (G, L) of q -LIST COLORING on a chordal graph. By Proposition 4 the chordal graph \overline{G} has a simplicial vertex v , and from the definition of a simplicial vertex this shows that $N_{\overline{G}}(v)$ is a clique in \overline{G} implying that $N_{\overline{G}}(v)$ is an independent set in G . Define the set $N_{\overline{G}}^i(v) := N_{\overline{G}}(v) \cap L^{-1}(i)$ containing the vertices which are non-neighbors of v in G , and which may be assigned color i . Our argument will rely on the following claim.

Claim. *If v is simplicial in \overline{G} and there is a proper q -list-coloring of (G, L) which assigns v color i , then there is a proper q -list-coloring which gives all vertices $\{v\} \cup N_{\overline{G}}^i(v)$ color i .*

Proof. Consider a proper coloring f of G respecting the lists L with $f(v) = i$. If there is a vertex $u \in N_{\overline{G}}^i(v)$ with $f(u) \neq i$, consider the effect of changing u 's color to i . Since $i \in L(u)$ by definition of $N_{\overline{G}}^i(v)$, we do not violate the requirement that all vertices receive a color from their list. So suppose that changing u 's color to i results in an improper coloring, because a neighbor of u was already colored i . Since u is not a neighbor of v by definition of $N_{\overline{G}}^i(v) \subseteq N_{\overline{G}}(v)$, this means there is a vertex $w \neq v$ such that $\{u, w\} \in E(G)$ and $f(w) = i$. Now observe that since $N_{\overline{G}}(v)$ is an independent set in G and $u \in N_{\overline{G}}^i(v) \subseteq N_{\overline{G}}(v)$, the presence of the edge $\{u, w\}$ shows that $w \notin N_{\overline{G}}(v)$, i.e., that w is *not* in the set of v 's non-neighbors. Together with $w \neq v$ this shows that w is a neighbor of v in G . But then f colors the adjacent vertices v and w with color i , which contradicts the assumption that f is a proper coloring. Hence changing u 's color to i must result in a proper list coloring, which proves the claim: if v is colored i , then all vertices in $N_{\overline{G}}^i(v)$ can also receive color i . \square

Using this claim, we describe an algorithm to solve q -LIST COLORING on cochordal graphs. The structure of this algorithm will prove the existence of a small NO-subinstance. The algorithm proceeds as follows on an instance (G, L) . If there is a vertex v with $L(v) = \emptyset$, then v shows that the answer is NO and the algorithm is done. Otherwise we find a vertex v which is simplicial in \overline{G} , and branch on which color from $L(v)$ to assign to v . The claim shows that in the branch where we try color $i \in L(v)$ on v , we may also assign all vertices of $N_{\overline{G}}^i(v)$ color i without loss of correctness. The answer to an instance in which these vertices receive color i , is equivalent to the answer after removing the vertices $S_i := \{v\} \cup N_{\overline{G}}^i(v)$ from the graph and removing color i from the lists of the vertices $N_G(S_i)$. Observe that if v is simplicial in \overline{G} then $N_G(v) = N_G(\{v\} \cup N_{\overline{G}}(v)) = N_G(S_i)$ and therefore we may equivalently simplify the instance in this branch by removing the vertices S_i and deleting color i from the lists of the vertices $N_G(v)$. The algorithm can therefore safely apply this transformation and call itself recursively on the remaining instance. The crucial insight for the analysis of the algorithm is that in the resulting instance, color i no longer appears on any list. To see this, note that vertex v is removed, as are all non-neighbors of v which had i on their list. All vertices which are not non-neighbors of v , and are not v itself, must be neighbors of v ; but then color i was explicitly removed from their lists. Hence in each branch we eliminate at least one color from the instance. Since the instance starts with at most q different colors occurring in the lists, after branching q levels deep we must either obtain a graph without vertices (and the answer is YES), or a graph containing a vertex with an empty list (and the answer is NO).

Using the structure of this algorithm we prove the lemma. Consider a NO-instance (G, L) of q -LIST COLORING where $G \in \text{COCHORDAL}$. If we run the sketched algorithm on this instance, the answer will be NO since the algorithm

is correct. Hence each branch ends with the detection of a vertex with an empty list. Suppose that in each call of the algorithm we mark the simplicial vertex v that is branched on, and we mark the detected vertex with an empty list when the algorithm outputs NO for a branch. Let $h(\ell)$ be the number of vertices marked in this process, for an instance whose lists contain ℓ different colors. From this definitions it follows that $h(0) = 1$. In an instance containing ℓ distinct colors, we mark the simplicial vertex that is branched on and then branch in at most ℓ ways, decreasing the total number of remaining colors in each branch. Hence $h(\ell) \leq 1 + \ell \cdot h(\ell - 1)$. This recurrence is bounded by $h(\ell) \leq (\ell + 1)!$ and since the input instance contains at most q distinct colors, the total number of vertices marked is at most $(q + 1)!$.

If we now consider the instance induced by the marked vertices and run the algorithm on this instance, branching on the simplicial vertices in the same order as before, then the algorithm will make exactly the same decisions as for the instance (G, L) ; thus the algorithm will output NO, which shows by correctness of the algorithm that the instance induced by the $(q + 1)!$ marked vertices is a NO-subinstance. Since this proves the existence of a NO-subinstance of the requested size, it completes the proof. \square

By employing a similar argument which shows how the structure of an algorithm to solve q -LIST COLORING on cographs can be used to find small NO-subinstances of the problem, we can prove that cographs have bounded-size NO-certificates.

Lemma 4. *The class COGRAPH is hereditary and has $g(q) := 2^{q^2}$ -size NO-certificates for q -LIST COLORING.*

Proof. Since cographs can be characterized as not having an induced P_4 subgraph, it is easy to see they are hereditary. To give a bound on the size of NO-certificates we use a similar approach as in the proof of Lemma 3: we give a simple algorithm which correctly decides q -LIST COLORING on cographs, and then argue that we can mark at most $g(q) := 2^{q^2}$ vertices such that the algorithm would also output NO on the instance induced by the marked vertices.

The algorithm for q -LIST COLORING uses dynamic programming on a cotree decomposition of the graph (Definition 2), similarly to the algorithm of (Klaus) Jansen and Scheffler [22, Theorem 4.7]. So let (G, L) be an instance of q -LIST COLORING with $G \in \text{COGRAPH}$ and consider a cotree representation \mathcal{T} of the graph G . We create a dynamic programming table $T[v, S]$ whose first index ranges over the nodes of \mathcal{T} , and whose second index ranges over subsets of $[q]$. The interpretation of the table is that $T[v, S] = \text{TRUE}$ if and only if the cograph $\text{CG}(\mathcal{T}, v)$ represented by the subtree of \mathcal{T} rooted at v can be q -list-colored with respect to the list assignment L , such that only the colors from S are used. In this interpretation (G, L) is a YES-instance if and only if the root-node r of \mathcal{T} satisfies $T[r, \{1, 2, \dots, q\}] = \text{TRUE}$. The table values satisfy the

following recurrence:

$$T[v, S] = \begin{cases} L(v) \cap S \neq \emptyset & \text{If } v \text{ is a leaf node.} \\ T[\text{LEFT}(v), S] \wedge T[\text{RIGHT}(v), S] & \text{If } v \text{ is a UNION node.} \\ \bigvee_{S' \subseteq S} T[\text{LEFT}(v), S'] \wedge T[\text{RIGHT}(v), S \setminus S'] & \text{If } v \text{ is a JOIN node.} \end{cases}$$

To justify that this recurrence indeed characterizes the behavior of the values $T[v, S]$, observe that the cograph represented by a leaf v of a cotree is just a singleton graph on the vertex v which can be list-colored using colors from S if S contains at least one admissible color for v . The graph represented by a cotree whose root is a UNION node is simply the disjoint union of the graphs represented by the subtrees rooted at the children. Since no color conflicts can occur between vertices in different connected components of a graph this explains the second item of the recurrence. Finally for the JOIN node observe that in any proper coloring of a graph $G_1 \otimes G_2$ there can be no vertex in G_1 which obtains the same color as a vertex of G_2 , since they are made adjacent by the JOIN operation. Hence any proper coloring of $G_1 \otimes G_2$ using only the color set S must use some subset $S' \subseteq S$ for the vertices of G_1 and the disjoint set $S \setminus S'$ for the vertices of G_2 . This proves that a dynamic programming algorithm which computes the values of T bottom-up in the cotree is correct.

We now use this algorithm to prove that if (G, L) is a NO-instance of q -LIST COLORING with $G \in \text{COGRAPH}$, then there exists a NO-subinstance on at most 2^{q^2} vertices. Consider a cotree representation \mathcal{T} of the graph G . If G contains a clique on $q + 1$ vertices, then this clique cannot be q -(list-)colored and hence the subinstance induced by this clique must be a NO-subinstance on $q + 1$ vertices; then we are done. Hence in the remainder we may assume that $\omega(G) \leq q$, which implies by Proposition 3 that the join height of G is smaller than q . Using this fact we now describe a recursive procedure which given a table entry $T[v, S]$ such that $T[v, S] = \text{FALSE}$, marks a number of vertices to preserve the FALSE value of this entry. If v is a leaf of the cotree, then it suffices to mark that single leaf. If v is a UNION node then at least one of $T[\text{LEFT}(v), S]$ and $T[\text{RIGHT}(v), S]$ is FALSE; recursively mark vertices for a subexpression which yields FALSE. The most interesting case is a JOIN node: for all $S' \subseteq S$, at least one of the terms $T[\text{LEFT}(v), S']$ and $T[\text{RIGHT}(v), S \setminus S']$ yields FALSE. For each subset $S' \subseteq S$ we recursively mark a “witness” for one subexpression which evaluates to FALSE.

Let M be the set of marked vertices and observe that we may obtain a cotree representation of $G[M]$ by considering the leaves L of \mathcal{T} corresponding to the marked vertices, taking the subcotree \mathcal{T}' induced by the paths from L to the root, and splicing out the internal vertices of \mathcal{T}' which have only a single child in \mathcal{T}' . For every node in \mathcal{T}' there is a corresponding node in \mathcal{T} , and as we have marked witnesses for the FALSE values in the root of \mathcal{T} , it is not difficult to see that the witnesses ensure FALSE values in the root of \mathcal{T}' . This shows that the algorithm outputs NO on the subinstance induced by M , and, similarly as in the proof of Lemma 3, since the algorithm is correct this proves that the

subinstance induced by M is a NO-instance. It remains to bound the number of marked vertices.

We can bound the number of vertices which were marked to preserve the NO value of a cell $T[v, S]$ based on the join height of the subtree \mathcal{T}_v rooted at v . Let $h(x)$ be the maximum number of vertices which are marked to preserve the FALSE-value of a cell $T[v, S]$ with $\text{JOINH}(\mathcal{T}_v) \leq x$. If $\text{JOINH}(\mathcal{T}_v) = 0$ then the subtree rooted at v contains only UNION nodes and leaves, and the procedure to mark a vertex for $T[v, S]$ will trace a path of UNION nodes through the tree until it reaches a leaf, and it will mark that single leaf: hence $h(0) = 1$. Now consider what happens when $\text{JOINH}(\mathcal{T}_v) > 0$. The marking procedure will trace a path from the root of \mathcal{T}_v , following subexpressions which evaluate to FALSE, until it reaches a leaf or a JOIN node. Since we mark only one vertex for a leaf, we focus on the JOIN node. For this node the procedure will recursively mark vertices for each subset of S . Since $S \subseteq [q]$ there are at most 2^q subsets, and for each subset we mark vertices in a subtree rooted at $\text{LEFT}(v)$ or $\text{RIGHT}(v)$; but note that the join height of these subtrees is at least one lower than that of \mathcal{T}_v . Hence for $x \geq 1$ we have $h(x) \leq 2^q \cdot h(x - 1)$. We can bound this recurrence as $h(x) \leq (2^q)^x$. Since we can assume that $\text{JOINH}(\mathcal{T}) < q$ it follows that the subinstance resulting from marking vertices of (G, L) contains less than $h(q) \leq 2^{q^2}$ vertices. This shows the existence of a small NO-subinstance of (G, L) and concludes the proof. \square

We note that a more detailed analysis of the marking procedure of the previous theorem gives a better bound. By relating marked vertices to permutations of the members of a partition of the color set, it is possible to prove that the number of marked vertices does not exceed $q^{3q} = 2^{3q \log q}$. In the interest of brevity we have chosen to give a shorter proof of a weaker bound.

By combining Theorem 1 and Corollary 2 with the bounds on sizes of NO-certificates for the hereditary graph classes considered in this section, we obtain the following corollary.

Corollary 3. *For every fixed integer q , the problems q -COLORING and q -LIST COLORING admit polynomial kernels on the parameterized graph classes $\text{USPLIT} + kv$, $\text{UCHORDAL} + kv$, and $\text{COGRAPH} + kv$.*

4. Negative results in the hierarchy

4.1. Kernelization lower bounds

We turn to the study of the limits of polynomial kernelizability in our parameter space, to complement the results of the previous section. We first show that 3-COLORING on $\text{PATH} + kv$ graphs does not admit a polynomial kernel unless $\text{NP} \subseteq \text{coNP}/\text{poly}$, thereby presenting a barrier to polynomial kernelizability in the hierarchy of Fig. 1. After establishing this theorem we consider parameterizations for which polynomial kernels were obtained in the previous section, and we give lower bounds on the degree of the polynomial bounding the bitsize of these kernels.

Our first negative result is a superpolynomial kernel lower bound for 3-COLORING on LINEARFOREST + kv graphs, which we will later lift to the parameterized graph family PATH + kv . The gadget in the proof of the following theorem is inspired by a reduction of Lokshantov et al. [23, Theorem 6.1]. We learned that Stefan Szeider independently found a similar result for FOREST + kv graphs.

Theorem 2. *3-COLORING on LINEARFOREST + kv graphs does not admit a polynomial kernel unless $NP \subseteq coNP/poly$.*

Proof. We give a polynomial-parameter transformation (Definition 1) from CNF-SAT parameterized by the number of variables n (Proposition 2) to 3-COLORING parameterized by deletion distance from a linear forest. Consider an input to CNF-SAT which consists of clauses C_1, \dots, C_m where each clause is a disjunction of literals of the form x_i or \bar{x}_i for $i \in [n]$. We build a graph G and a modulator $X \subseteq V(G)$ such that $|X| = 2n + 3$ and $G - X \in \text{LINEARFOREST}$.

Construct a clique on three vertices p_1, p_2, p_3 ; this clique will serve as our palette of three colors, since in any proper 3-coloring all three colors must occur on this clique. For each variable x_i for $i \in [n]$ we make vertices T_i and F_i and add the edge $\{T_i, F_i\}$ to G . We make the vertices T_i, F_i adjacent to the palette vertex p_1 . Now we create gadgets for the clauses of the satisfiability instance.

For each clause C_j with $j \in [m]$, let n_j be the number of literals in C_j and create a path $(a_j^1, b_j^1, a_j^2, b_j^2, \dots, a_j^{n_j}, b_j^{n_j})$ on $2n_j$ vertices. We call this the clause-path for C_j . Make the first and last vertices on the path a_j^1 and $b_j^{n_j}$ adjacent to the palette vertex p_1 . Make the b -vertices $b_j^1, b_j^2, \dots, b_j^{n_j}$ adjacent to palette vertex p_3 . As the last step we connect the vertices on the path to the vertices corresponding to literals. For $r \in [n_j]$ if the r -th literal of C_j is x_i (resp. \bar{x}_i) then make vertex a_j^r adjacent to T_i (resp. F_i). This concludes the construction of the graph G . We use the modulator $X := \{T_i, F_i \mid i \in [n]\} \cup \{p_1, p_2, p_3\}$. It is easy to verify that $|X| = 2n + 3$ and therefore that the parameter of the 3-COLORING instance is polynomial in the parameter of CNF-SAT. Since vertices on a clause-path are not adjacent to other clause-paths, it follows that $G - X$ is a linear forest. It remains to prove that the two instances are equivalent: there is a satisfying assignment for the CNF-SAT instance on clauses C_1, \dots, C_m if and only if the graph G is 3-colorable.

(\Rightarrow) Assume that $v: [n] \rightarrow \{\text{TRUE}, \text{FALSE}\}$ is a satisfying assignment. We construct a proper 3-coloring $f: V(G) \rightarrow [3]$ of G as follows:

- For the palette vertices p_i with $i \in [3]$ define $f(p_i) := i$.
- For each $i \in [n]$ with $v(i) = \text{TRUE}$, set $f(T_i) := 2$ and $f(F_i) := 3$.
- For each $i \in [n]$ with $v(i) = \text{FALSE}$, set $f(T_i) := 3$ and $f(F_i) := 2$.

Using the definition of G it is easy to verify that this partial coloring f is proper; it remains to extend f to the clause-paths. Consider the clause-path P_j corresponding to a clause C_j . For each vertex a_j^r whose adjacent literal is TRUE under v , set $f(a_j^r) := 3$. Since v is a satisfying assignment we color at least one vertex on P_j with 3, and since literals which evaluate to TRUE were given

color 2 in the previous step, we do not create any conflicts. We now show how to color the remainder of the clause-path P_j . If a_j^1 did not receive a color (i.e. its neighboring literal evaluates to FALSE and the literal-vertex is colored 3) then set $f(a_j^1) := 2$ and $f(b_j^1) = 1$. Now alternately color the successive a -vertices with 2 and b -vertices with 1, until arriving at an a -vertex which we already assigned color 3 (because its adjacent literal evaluates to TRUE). This assignment does not create any conflicts. Now start at the last vertex $b_j^{n_j}$ and color it with 2, and work backwards giving uncolored a -vertices color 1 and b -vertices color 2, again until we arrive at a 3-colored a -vertex. If there are any uncolored subpaths left after this procedure (which occurs if two or more literals of the clause are TRUE), then color the a -vertices on this subpath with 1 and the b -vertices with 2. Using the construction of G this color assignment is easily seen to be proper. Since the clause-paths are independent, we can perform this procedure independently on each clause-path to obtain a proper 3-coloring of G .

(\Leftarrow) Let $f: V(G) \rightarrow [3]$ be a proper 3-coloring of G , and assume without loss of generality (by permuting the color set if needed) that $f(p_1) = 1, f(p_2) = 2$ and $f(p_3) = 3$. We show that the CNF-SAT instance has a satisfying assignment. We first show that on every clause-path P_j corresponding to a clause C_j , there must be a vertex colored 3. So assume for a contradiction that some clause-path P_j is colored using only 1 and 2. Since the first and last vertices on the path are adjacent to palette vertex p_1 , those vertices cannot be colored 1 and hence they must be colored 2. But since the path has an even number of vertices, Proposition 5 now shows that the clause-path cannot be 2-colored using only 1 and 2 which gives a contradiction. So in a proper 3-coloring of G all clause-paths contain a vertex colored 3. The b -vertices on a clause-path are adjacent to p_3 and hence cannot be colored 3; therefore some a -vertex a_j^r which is adjacent to a literal vertex T_i or F_i must be colored with 3. This implies that the corresponding literal-vertex must be colored 2. Now consider the valuation which makes all literals colored 2 TRUE, and all literals colored 3 FALSE. The previous argument shows that at least one literal of each clause is TRUE. Since T_i and F_i are adjacent to each other, and both are adjacent to p_1 , we color exactly one of them with 2 in a proper 3-coloring of G and hence we obtain a valid satisfying assignment for the CNF-SAT instance.

Since the construction can be carried out in polynomial time and guarantees that the parameter of the output instance is bounded polynomially in the parameter of the input instance, the given reduction is indeed a polynomial-parameter transformation. The theorem now follows from Proposition 2 since kernel lower bounds are transferred by polynomial-parameter transformations, as noted in Section 2. \square

By considering the proof of Theorem 2 we can obtain a corollary for a stronger parameterization. Consider the graph G and modulator X which is constructed in the proof: the remainder graph $G - X$ is a linear forest, a disjoint union of paths. By adding vertices of degree two to G we may connect all the paths in $G - X$ into a single path. Since degree-2 vertices do not affect the 3-colorability of a graph, this does not change the answer to the instance

and ensures that $G - X$ is a single path. Hence we obtain:

Corollary 4. *3-COLORING on PATH + kv graphs does not admit a polynomial kernel unless $NP \subseteq coNP/poly$.*

The remainder of this section is devoted to the proof of various explicit lower bounds on the degree of the polynomial in the kernel size bounds, using the machinery of Dell and van Melkebeek [20]. We first consider the q -COLORING problem on INDEPENDENT + kv graphs, giving a lower bound which almost matches the upper bound we obtained earlier, and afterwards we present a general theorem which shows how to construct kernel size lower bounds from large NO-certificates to q -LIST COLORING.

Recall that an instance of q -NAE-SAT is a formula built from the conjunction of clauses containing at most q literals each, which is satisfied if at least one literal in each clause evaluates to FALSE, and at least one evaluates to TRUE. By relating q -CNF-SAT to $(q + 1)$ -NAE-SAT (both parameterized by the number of variables) through a folklore reduction we obtain a compression lower bound for $(q + 1)$ -NAE-SAT, and by relating the latter to $(q + 1)$ -COLORING on INDEPENDENT + kv graphs we can obtain the following theorem.

Theorem 3. *For every $q \geq 4$, q -COLORING on INDEPENDENT + kv graphs does not have a kernel of bitsize $\mathcal{O}(k^{q-1-\varepsilon})$ for any $\varepsilon > 0$ unless $NP \subseteq coNP/poly$.*

Proof. The proof consists of the following steps. We first show that there is a linear-parameter transformation (Definition 1) from q -CNF-SAT parameterized by the number of variables n to $(q + 1)$ -NAE-SAT parameterized by n . As the second step we give a linear-parameter transformation from q -NAE-SAT parameterized by n to q -COLORING on INDEPENDENT + kv graphs. By combining these two transformations, we can use a kernelization algorithm for $(q + 1)$ -COLORING on INDEPENDENT + kv graphs to reduce the size of an instance of q -CNF-SAT in the following way. Start by transforming a given instance of q -CNF-SAT on n variables into an instance of $(q + 1)$ -NAE-SAT on $\mathcal{O}(n)$ variables, which in turn is transformed into $(q + 1)$ -COLORING on INDEPENDENT + kv graphs with $k \in \mathcal{O}(n)$, and finally apply the kernelization algorithm to this instance. Hence we see that a kernel with $\mathcal{O}(k^{(q+1)-1-\varepsilon})$ bits for $(q+1)$ -COLORING would output an instance of size $\mathcal{O}(n^{q-\varepsilon})$, and by a recent result of Dell and van Melkebeek (Proposition 1) such a sparsification algorithm for any $q \geq 3$ would imply $NP \subseteq coNP/poly$. Hence we find that for $q \geq 3$ the problem $(q + 1)$ -COLORING on INDEPENDENT + kv graphs cannot have kernels with bitsize $\mathcal{O}(k^{(q+1)-1-\varepsilon})$ unless $NP \subseteq coNP/poly$. By a change of variables this shows that for $q \geq 4$ the q -COLORING on INDEPENDENT + kv graphs problem cannot have kernels with $\mathcal{O}(k^{q-1-\varepsilon})$ bits, which implies the theorem. To complete the proof it therefore suffices to give the two linear-parameter transformations.

Claim. *There is a linear-parameter transformation from q -CNF-SAT parameterized by n to $(q + 1)$ -NAE-SAT parameterized by n .*

Proof. This transformation can be considered folklore, and was used e.g. by Knuth [24, Section 6]; we repeat it here for completeness. Let ϕ be a q -CNF-SAT-formula on n variables. Obtain the $(q + 1)$ -NAE-SAT formula ϕ' on $n + 1$ variables by creating a single new variable z , and adding the positive literal z to each clause of ϕ . Any satisfying assignment of ϕ is transformed into a satisfying not-all-equal assignment of ϕ' by setting z to FALSE. In the other direction, any not-all-equal assignment which satisfies ϕ' and sets z to FALSE, is also a satisfying satisfiability assignment for ϕ . But if we have a not-all-equal assignment which sets z to TRUE, then we must also obtain a satisfying not-all-equal assignment if we flip the truth assignment of each variable, leading to a not-all-equal assignment which makes z FALSE and hence implies that ϕ is satisfiable. Thus the two instances are equivalent, and since $n' = n + 1$ this constitutes a linear-parameter transformation. \square

Claim. *There is a linear-parameter transformation from q -NAE-SAT parameterized by n to q -COLORING on INDEPENDENT + kv graphs.*

Proof. Consider an instance of q -NAE-SAT on n variables, and let the clauses be C_1, \dots, C_m . We build a graph G and a modulator $X \subseteq V(G)$ such that $G - X \in \text{INDEPENDENT}$.

Again we construct a clique to act as our palette, this time using q colors and corresponding vertices p_1, \dots, p_q ; each vertex will take a different color in each q -coloring of G .

For each variable x_i for $i \in [n]$ we make $2q$ vertices $T_{i,1}, \dots, T_{i,q}, F_{i,1}, \dots, F_{i,q}$. For all $j \in [q]$ we make $T_{i,j}$ adjacent to $F_{i,j}$. Then we make a cycle through successive vertices $T_{i,1}, \dots, T_{i,q}$ and back to $T_{i,1}$. We now connect the vertices to the palette, to ensure that there are only two different q -colorings for this gadget (modulo changing the permutation of the colors on the palette). When we discuss the effect of the gadget on potential q -colorings for G , we will indicate by color i ($i \in [q]$) the color that vertex p_i receives. Now do as follows. For all $j \in [q]$ we make $T_{i,j}$ and $F_{i,j}$ adjacent to all vertices of the palette except vertices p_i and p_{i+1} , ensuring that $T_{i,j}$ and $F_{i,j}$ can only take colors i or $i + 1$. We evaluate these numbers modulo q , e.g. $T_{i,q}$ is adjacent to all palette vertices except p_q and p_1 .

It is crucial to observe the following about these variable gadgets: each vertex $T_{i,j}$ can take only two different colors, but each possibility is also one of the only two choices for a neighbor on the cycle. E.g. vertex $T_{i,1}$ can take color 1 or 2; if it has color 2 then vertex $T_{i,2}$ must take color 3, vertex $T_{i,3}$ must take color 4 and so on. Similarly, if $T_{i,1}$ has color 1 then we can make the same argumentation following the cycle in the other direction. Furthermore, since any vertices $T_{i,j}$ and $F_{i,j}$ have the same two possible colors j and $j + 1$ (modulo q), one will take color j and the other must take color $j + 1$. This means that effectively there are only two possible colorings for the gadget, which are shown in Figure 2.

The first coloring, with $T_{i,1}$ colored 1, will be interpreted as assigning TRUE to x_i , the other one corresponds to assigning FALSE. We emphasize the key

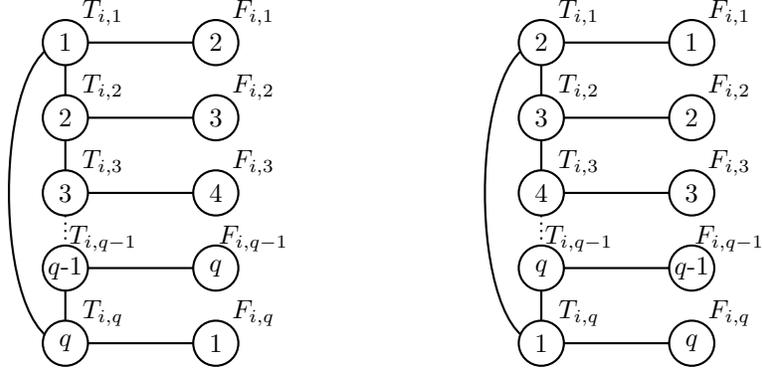


Figure 2: The two colorings for the variable gadget for x_i corresponding to assigning TRUE or FALSE respectively.

property: if x_i is TRUE, then each vertex $T_{i,j}$ will be colored j (and each $F_{i,j}$ will be colored $j+1$). If x_i is FALSE then each $F_{i,j}$ will be colored j (and each $T_{i,j}$ will be colored $j+1$).

We will now add one vertex c_k for each clause C_k . Let $C_k = (\ell_1 \vee \dots \vee \ell_q)$. For each ℓ_j ($j \in [q]$) with $\ell_j = x_i$, we connect c_k to $T_{i,j}$. For each ℓ_j ($j \in [q]$) with $\ell_j = \neg x_i$, we connect c_k to $F_{i,j}$. It is easy to see that this has the desired effect, using the assignment corresponding to a given coloring: if all literals evaluate to TRUE, then c_k is connected to one vertex of each color in $[q]$. Then however, c_k cannot be properly colored. The same holds when all the literals evaluate to FALSE.

We briefly sketch correctness of this reduction. If the graph G can be properly q -colored, then take the assignment corresponding to the coloring of the variable gadgets. The added vertices c_k ensure that there is no clause with literals all evaluating to TRUE or all FALSE. Conversely, let the formula be satisfiable and color the vertex gadgets according to a satisfying assignment. It follows easily, that among the q neighbors of any clause vertex c_k at most $q-1$ colors are used: indeed, consider two adjacent literals in the clause C_k , i.e., ℓ_j and ℓ_{j+1} , such that ℓ_j evaluates to FALSE and ℓ_{j+1} to TRUE. Using Figure 2 it is easy to verify that the neighbor of c_k that represents ℓ_j is colored $j+1$ (since ℓ_j evaluates to FALSE), and the neighbor of c_k representing ℓ_{j+1} is also colored $j+1$ (as ℓ_{j+1} evaluates to TRUE). Hence out of the q neighbors of c_k there are two which share the same color, leaving at least one color free for c_k . This implies that the partial coloring can be extended to all clause vertices independently.

Clearly, the clause vertices c_k form an independent set. Thus we may define the modulator X as the vertices of the palette together with all vertices of the variable gadgets; the size of this set is $|X| = 2qn + q$, which is linear in n for fixed q . It is easy to see that $G - X \in \text{INDEPENDENT}$. Hence the instance (G, X) is a valid output of a linear-parameter transformation, which completes the proof. \square

By the argumentation given at the beginning of the proof, the two claims together prove the theorem. \square

The proof of Theorem 3 shows that an improved compression lower bound for q -NAE-SAT also yields a better lower bound for q -COLORING on INDEPENDENT+ kv graphs. In particular, if it would be proven that for $q \geq 3$ q -NAE-SAT on n variables cannot be compressed in polynomial time into an equivalent instance on $\mathcal{O}(n^{q-\varepsilon})$ bits, then the kernel of Lemma 1 is optimal up to $k^{o(1)}$ factors. The remainder of this section revolves around the following notion.

Definition 4. Let \mathcal{F} be a graph class, and let (G, L) be a NO-instance of q -LIST COLORING with $G \in \mathcal{F}$. Then (G, L) is an *irreducible NO-instance* of q -LIST COLORING on \mathcal{F} if for all vertices $v \in V(G)$, the subinstance on graph $G - \{v\}$ is a YES-instance.

The following theorem shows how to turn irreducible NO-instances of q -LIST COLORING into explicit kernel size lower bounds.

Theorem 4. *If \mathcal{F} is closed under disjoint union and there is an irreducible NO-instance of $(q - 2)$ -LIST COLORING on \mathcal{F} containing $t \geq 3$ vertices, then q -COLORING on $\mathcal{F} + kv$ graphs does not admit a kernel with bitsize $\mathcal{O}(k^{t-\varepsilon})$ for any $\varepsilon > 0$ unless $NP \subseteq coNP/poly$.*

Proof. We proceed similarly as in the proof of Theorem 3. We will show how the irreducible NO-instance on t vertices can be used to give a linear-parameter transformation from t -CNF-SAT parameterized by the number of variables n to q -COLORING on $\mathcal{F} + kv$ graphs. So assume that (H, L) is a NO-instance of $(q - 2)$ -LIST COLORING with $|V(H)| = t$ such that any vertex deletion turns it into a YES-instance. Let the list function L for this instance assign admissible colors from the set $[q - 2]$, and number the vertices of H in an arbitrary way as h_1, \dots, h_t .

Now consider an input to t -CNF-SAT which consists of clauses C_1, \dots, C_m , where each clause contains exactly t literals. Each literal is of the form x_i or \bar{x}_i for $i \in [n]$. We build a graph G and a modulator $X \subseteq V(G)$ such that $|X| = 2n + q$ and $G - X \in \mathcal{F}$. Construct a clique on q vertices p_1, \dots, p_q to act as a palette. For each variable x_i for $i \in [n]$ we make vertices T_i and F_i and add the edge $\{T_i, F_i\}$ to G . Make T_i and F_i adjacent to all palette vertices except p_{q-1} and p_q . We use the irreducible NO-instance (H, L) to create gadgets for the clauses. For each clause C_j with $j \in [m]$, add a disjoint copy of the graph H to G and denote it by H^j on vertices h_1^j, \dots, h_t^j . For each $i \in [t]$ make vertex h_i^j adjacent to all palette vertices p_s with $s \in [q - 2] \setminus L(h_i)$, and to the vertex p_q . If the i -th literal of C_j is x_s (resp. \bar{x}_s) then make h_i^j adjacent to T_s (resp. F_s). This concludes the description of the graph G . Use the set $X := \{T_i, F_i \mid i \in [n]\} \cup \{p_1, \dots, p_q\}$ as the modulator. Since $G - X$ is a disjoint union of copies of $H \in \mathcal{F}$, and since \mathcal{F} is closed under disjoint union by assumption, it follows that $G - X \in \mathcal{F}$ which proves that X is indeed a modulator to \mathcal{F} of size linear in n . Let us now prove the correctness of the

reduction: the graph G is q -colorable if and only if the t -CNF-SAT instance is satisfiable.

(\Rightarrow) Assume that function $f: V(G) \rightarrow [q]$ gives a proper q -coloring of G . Since a proper coloring gives unique colors to the vertices of a clique, we may assume without loss of generality that for the palette vertices p_i with $i \in [q]$ we have $f(p_i) = i$. Consider some variable index $i \in [n]$. By adjacency of the vertices T_i and F_i to the palette vertices, and by the edge $\{T_i, F_i\}$ it follows that one of T_i is colored $q - 1$ and the other is colored q . Consider the truth assignment which sets a variable x_i to TRUE if and only if $f(T_i) = q$. We will show that this is a satisfying assignment for the input formula.

So consider a clause C_j of the input formula, which is represented by the graph H^j which is a copy of H . By adjacency of vertices h_1^j, \dots, h_t^j to the palette, it is easy to verify that h_i^j is assigned a color in $L(h_i) \cup \{q - 1\}$ by the proper coloring f . For the next step, assume for a contradiction that no vertex of the graph H^j is colored with $q - 1$. Then the coloring induced by f is a $(q - 2)$ -list-coloring of H^j which satisfies the list requirements from L , which contradicts the assumption that (H, L) is a NO-instance. Hence there is at least one vertex h_i^j which is colored with $q - 1$. But then the corresponding literal-vertex T_s or F_s which is adjacent to h_i^j cannot be colored $q - 1$, so it is colored q . By our choice of valuation function, the literal evaluates to TRUE which shows that clause C_j is satisfied. Since this holds for every clause, the formula is satisfiable.

(\Leftarrow) Assume that $v: [n] \rightarrow \{\text{TRUE}, \text{FALSE}\}$ is a satisfying assignment. We construct a proper q -coloring $f: V(G) \rightarrow [q]$ of G as follows:

- For the palette vertices p_i with $i \in [q]$ define $f(p_i) := i$.
- For each $i \in [n]$ with $v(i) = \text{TRUE}$, set $f(T_i) := q$ and $f(F_i) := q - 1$.
- For each $i \in [n]$ with $v(i) = \text{FALSE}$, set $f(T_i) := q - 1$ and $f(F_i) := q$.

It is easy to see that this partial assignment is proper; we show how to extend it to the remainder of the graph. The remainder consists of a disjoint copy H^j for each clause $j \in [m]$. For each such H^j function v satisfies at least one literal of clause j . Suppose that the i -th literal is satisfied, and look at the corresponding vertex h_i^j . By the assumption that (H, L) is an irreducible NO-instance of $(q - 2)$ -LIST COLORING, it follows that the subinstance on graph $H - \{h_i\}$ is a YES-instance. Take a $(q - 2)$ -list-coloring of $H - \{h_i\}$ and use it for the vertices of $H^j \setminus \{h_i^j\}$. By the correspondence between the list function and the adjacencies to the palette, and since the literal-vertices F_i and T_i only take colors $q - 1$ and q which are not used in a $(q - 2)$ -list-coloring, this leads to a proper extension of the coloring f onto the graph $H^j \setminus h_i^j$. Observe that at this point, all neighbors of h_i^j in G have received a color, and that no such neighbor is colored with $q - 1$: for the neighbors in $H^j \setminus h_i^j$ this follows from the $(q - 2)$ -list-coloring, for the palette vertices it follows by construction and for the literal-vertex adjacent to h_i^j this is ensured by the definition of f . Hence we can safely set $f(h_i^j) = q - 1$ to extend f onto the entire graph H^j . Since the various copies of H are mutually non-adjacent we can perform this color

extension independently for all copies to obtain a proper coloring of G .

This concludes the correctness proof of the linear-parameter transformation. It is easy to see that it can be computed in polynomial time. To establish the theorem, observe that if q -COLORING on $\mathcal{F}+kv$ graphs would have a kernel with bitsize $\mathcal{O}(k^{t-\varepsilon})$, then we could compress an instance of t -CNF-SAT on n vertices by transforming it to the q -COLORING on $\mathcal{F}+kv$ graphs instance with parameter value $k \in \mathcal{O}(n)$, and then applying the kernelization algorithm to obtain an equivalent instance of q -COLORING of bitsize $\mathcal{O}(n^{t-\varepsilon})$. Since q -COLORING is obviously decidable, by Proposition 1 a kernel of such bitsize does not exist unless $\text{NP} \subseteq \text{coNP/poly}$. \square

As a graph on $\mathcal{O}(k^{t/2-\varepsilon})$ vertices can be encoded in $\mathcal{O}(k^{t/2-\varepsilon})^2 = \mathcal{O}(k^{t-2\varepsilon})$ bits using its adjacency matrix, Theorem 4 gives the following corollary.

Corollary 5. *If \mathcal{F} is closed under disjoint union and there is an irreducible NO-instance of $(q-2)$ -LIST COLORING on \mathcal{F} containing $t \geq 3$ vertices, then q -COLORING on $\mathcal{F}+kv$ graphs does not admit a kernel with $\mathcal{O}(k^{t/2-\varepsilon})$ vertices for any $\varepsilon > 0$ unless $\text{NP} \subseteq \text{coNP/poly}$.*

In the next section we will prove the existence of large irreducible NO-instances to q -LIST COLORING to supply explicit kernel size lower bounds.

4.2. Lower bounds to the sizes of NO-certificates for q -LIST COLORING

In Section 3.2 we constructed functions which bound the sizes of NO-certificates for q -LIST COLORING on the graph classes JSPLIT , JCOCHORDAL , and COGRAPH . The bounds we obtained were exponential in the number of colors q used in the instances. In this section we prove that the exponential dependence on q cannot be avoided, by giving explicit constructions of large irreducible NO-instances. We start by showing that for the class of paths, there is *no* function depending on q alone which can bound the size of NO-certificates, which explains why there is no polynomial kernel for the 3-COLORING problem on $\text{PATH}+kv$ graphs.

Lemma 5. *For every $q \geq 2$ and every even integer $t \geq 2$ there is an irreducible NO-instance of q -LIST COLORING on a path graph, containing t vertices.*

Proof. Let G be the path on successive vertices v_1, \dots, v_t with $t \geq 2$ an even integer. Define $L(v_1) = L(v_t) := \{1\}$, and let $L(v_i) := \{1, 2\}$ for $1 < i < t$. We claim that (G, L) is an irreducible NO-instance of q -LIST COLORING. To see that it is a NO-instance, observe that v_1 has only one color on its list and must therefore be colored 1, which forces v_2 to be colored 2, which forces v_3 to be colored 1, and so on: coloring v_1 with 1 forces all even-numbered vertices to be colored 2. But this prevents v_t from being assigned a color on its list, since t is even and $L(v_t) = \{1\}$. After a single vertex v_i is removed from the path, we may find a proper q -list-coloring by alternately assigning 1 and 2 from the beginning of the path until reaching v_i , and also alternating 1 and 2 backwards starting from v_t . Hence (G, L) is indeed an irreducible NO-instance. \square

There is one unified construction which simultaneously acts as a lower bound for the three considered graph classes JSPLIT , JCOCHORDAL , and COGRAPH .

Lemma 6. *For every even integer $q \geq 2$ there is an irreducible NO-instance of q -LIST COLORING on a graph in the set $\text{SPLIT} \cap \text{COCHORDAL} \cap \text{COGRAPH}$, containing $q/2 + \binom{q}{q/2}$ vertices.*

Proof. Let q be even and consider the q -LIST COLORING instance constructed as follows. Initialize G as a clique X on $q/2$ vertices and set $L(x) := [q]$ for all $x \in X$. For every $S \in \binom{[q]}{q/2}$ add a vertex v_S to G with $N_G(v_S) := X$ and $L(v_S) := S$. Let the resulting instance be (G, L) , and observe that G is a split graph on $q/2 + \binom{q}{q/2}$ vertices since it partitions into an independent set and a clique. Since split graphs are chordal and closed under complementation we have $G \in \text{COCHORDAL}$. To see that G is a cograph observe that it is the join of a clique and an independent set, both of which are cographs, and that cographs are closed under taking joins. We will prove that (G, L) is irreducible: it is a NO-instance to q -LIST COLORING, but any vertex removal turns it into a YES-instance.

We first show that (G, L) is a NO-instance. Assume for a contradiction that $f: V(G) \rightarrow [q]$ is a proper list-coloring of G . Since X is a clique, all vertices of X receive different colors under f . Let $S := f^{-1}(X)$ be the $|X| = q/2$ colors assigned to X by f . During the construction of G we added a vertex v_S with neighborhood X and list $L(v_S) := S$ to the graph. But the choice of v_S ensures that all colors of $L(v_S)$ occur on the neighbors of v_S , and therefore f cannot be a proper list-coloring; contradiction. Hence (G, L) is indeed a NO-instance.

Now we prove that any vertex-deletion turns (G, L) into a YES-instance. So let $z \in V(G)$ be an arbitrary vertex, and consider the subinstance $(G - \{z\}, L')$ where L' is the restriction of L to the remaining vertices.

- If $z \in X$, then assign the $q/2 - 1$ remaining vertices of the clique $X' := X - \{z\}$ colors 1 up to $q/2 - 1$; this is compatible with their lists. Now consider the remaining vertices. For each $S \in \binom{[q]}{q/2}$ the vertex v_S has a list of $|S| = q/2$ admissible colors, and after removal of z vertex v_S has only $q/2 - 1$ neighbors left in $G - \{z\}$. Hence there must be one color on the list of v_S which is not yet used on a neighbor, and we use that color for v_S . Since the vertices not in X form an independent set, we may assign these colors independently to obtain a proper q -list-coloring of $(G - \{z\}, L')$.
- Now consider the remaining case that $z \notin X$, so $z = v_S$ for some $S \in \binom{[q]}{q/2}$. Give each vertex of X a unique color from the set S . For each set $S' \in \binom{[q]}{q/2} \setminus \{S\}$ it remains to choose a color for the vertex $v_{S'}$. By definition we have $L'(v_{S'}) = S'$. The neighbors of $v_{S'}$ in $G - \{v_S\}$ are exactly the vertices of the clique X and they use up all colors from S ; so the colors in $S' \setminus S$ can be used on $v_{S'}$. Since $S' \neq S$ and $|S'| = |S| = q/2$ it follows that there is at least one color in $S' \setminus S$ which is available for use on $v_{S'}$, and as before we can use the fact that the vertices not in X form

an independent set to argue that this leads to a proper q -list-coloring of the instance $(G - \{z\}, L')$.

Since this shows that (G, L) is an irreducible NO-instance with $G \in \text{SPLIT} \cap \text{COCHORDAL} \cap \text{COGRAPH}$ this concludes the proof. \square

An overview of the various upper and lower bounds for NO-certificate and kernel sizes can be found in Table 1. We conclude the section with the following corollary, which results from combining the previous lemma with Corollary 5.

Corollary 6. *For every even integer $q \geq 4$ and $\varepsilon > 0$ the q -COLORING problem on parameterized $\text{USPLIT} + kv$, $\text{UCOCHORDAL} + kv$, or $\text{COGRAPH} + kv$ graphs does not admit a kernel with $\mathcal{O}\left(k^{\frac{1}{2}(q/2-1+\binom{q-2}{q/2-1})-\varepsilon}\right)$ vertices unless $\text{NP} \subseteq \text{coNP/poly}$.*

5. Domination-related parameters

In this section we show that the complexity of 3-COLORING is strongly related to the domination-structure of the graph.

Theorem 5. *3-COLORING on a general graph G can be solved in $\mathcal{O}^*(3^k)$ time when given a dominating set X of size k .*

Proof. Let X be a dominating set in graph G of size k . The algorithm proceeds as follows. For each of the 3^k possible assignments of colors to X , we check in linear time whether adjacent vertices received the same color. If the partial coloring is proper then we determine whether it can be extended to the remainder of the graph, and this check can be modeled as a 3-LIST COLORING instance on the graph $G - X$: for every vertex $v \in G - X$ the list of available colors is formed by those elements of $\{1, 2, 3\}$ which do not occur on v 's neighbors in X . Since X is a dominating set, every vertex has at least one colored neighbor and therefore each vertex of $G - X$ has a list of at most two available colors. It has long been known that such 3-LIST COLORING instances can be solved in polynomial time by guessing a color for a vertex and propagating the implications; see for example the survey by Tuza [25, Section 4.3]. Hence for each assignment of colors to X we can test in polynomial time whether it can be extended to $G - X$ or not, and G is 3-colorable if and only if at least one of these attempts succeeds. \square

On graph classes such as planar graphs and apex-minor-free graphs [26] where DOMINATING SET can be suitably well approximated, the requirement that a dominating set is given in the input can be dropped from Theorem 5 at the cost of an increase in the running time, showing that 3-COLORING is fixed-parameter tractable on these graph classes when parameterized by the domination *number*. Whether such approximation is possible on general graphs, even in FPT-time, is one of the important open problems of parameterized approximation theory [27].

The fixed-parameter tractability of 3-COLORING parameterized by the size of a given dominating set raises the question whether the problem admits a polynomial kernel. Assuming $\text{NP} \not\subseteq \text{coNP}/\text{poly}$ this is not the case, which can be seen from the proof of Theorem 2: the modulator X which is constructed in the proof is a dominating set in the graph, and therefore the given reduction serves as a polynomial-parameter transformation from CNF-SAT parameterized by n to 3-COLORING parameterized by the size of the dominating set X .

Having a restricted domination-structure in a 3-COLORING instance *does* make it more amenable to kernelization, which becomes clear when we use a different parameter. Recall that the class DOMINATED contains those graphs in which each connected component has a dominating vertex.

Theorem 6. *3-COLORING on DOMINATED + kv graphs admits a polynomial kernel.*

Proof. The outline of the proof is as follows. We first give a reduction procedure which transforms an instance of 3-COLORING on DOMINATED + kv graphs to a graph in an even simpler graph class. Let WINDMILL be the class of graphs in which every connected component C has a dominating vertex v such that $C - \{v\}$ has maximum degree at most one. We show that an instance (G, X) on DOMINATED + kv graphs can be reduced to an instance (G', X') on WINDMILL + kv graphs. As the second step we show that the class WINDMILL satisfies all requirements of Theorem 1. Therefore an instance of 3-COLORING on DOMINATED + kv graphs can be kernelized by transforming it to WINDMILL + kv , and then applying Theorem 1. Since WINDMILL \subseteq DOMINATED the output instance of on WINDMILL + kv graphs is also a valid, equivalent instance on DOMINATED + kv graphs which shows that this suggested kernelization indeed outputs an instance of the *same* problem as was given in the input. To prove the theorem it therefore suffices to supply the two mentioned ingredients.

Lemma 7. *There is a polynomial-time algorithm which transforms an instance of 3-COLORING on DOMINATED + kv graphs into an equivalent instance on WINDMILL + kv graphs.*

Proof. We sketch the actions of the algorithm. On input (G, X) the algorithm first tests whether G contains an odd wheel as a subgraph - recall that an odd wheel is the graph obtained by adding a universal vertex to a cycle on an odd number of vertices. The test can be done in polynomial time by noting that G contains an odd wheel if and only if there is a vertex $v \in V(G)$ such that $G[N(v)]$ is not bipartite. It is easy to see that at least four colors are required to properly color an odd wheel; hence if we find an odd wheel in G then the answer to the instance is NO and we output a constant-sized NO-instance.

As the next step, the algorithm tests whether $G - X$ contains a diamond as a subgraph. Recall that a diamond is a graph on vertices $\{u, x, y, v\}$ with edges $\{\{u, x\}, \{u, y\}, \{v, x\}, \{v, y\}, \{x, y\}\}$. Observe that if $G - X$ contains a diamond subgraph on $\{u, x, y, v\}$ then the edge $\{u, v\}$ cannot be present, otherwise this would be an odd wheel with a rim of three vertices (i.e. K_4), and

it would have been found by the previous stage. In any proper 3-coloring of the diamond the vertices u and v must receive the same color: if they obtain different colors, then the two colors used on u and v cannot be used on x or y (by their adjacencies), but x and y must also receive different colors from each other since $\{x, y\} \in E(G)$; this cannot be done with only three colors. From the fact that u and v are non-adjacent and must receive the same color in any 3-coloring, it is not hard to see that G is 3-colorable if and only if the graph G' which is obtained from G by identifying u and v is 3-colorable. Hence we may transform the instance (G, X) to (G', X) . Observe that after this identification we have $G' - X \in \text{DOMINATED}$: this follows easily from the definition of DOMINATED , using the fact that we have identified non-adjacent vertices u, v from the *same* connected component of the graph $G - X \in \text{DOMINATED}$. After the modification to the graph the algorithm starts over by testing for an odd wheel. The algorithm halts when no diamond is found in $G - X$; since each reduction step reduces the number of vertices there are at most $|V(G)|$ rounds until termination and the whole process takes polynomial time.

To conclude the proof we show that the output (G, X) of the reduction algorithm must satisfy $G - X \in \text{WINDMILL}$. Since the input graph minus its modulator is contained in DOMINATED and each reduction step preserves this fact, the output satisfies $G - X \in \text{DOMINATED}$. Additionally, the graph $G - X$ is diamond-subgraph-free when no more reduction steps apply to it, and does not contain an odd wheel. To prove that such a graph $G - X$ is contained in WINDMILL , consider a connected component C of $G - X$. Since $G - X \in \text{DOMINATED}$ there is a dominating vertex u in C . If $C - \{u\}$ contains a vertex v of degree more than two (i.e. not counting the neighbor u), then we derive a contradiction. So let $v \in N_G(u)$ have at least two more neighbors $x, y \in N_G(v) \setminus \{u\}$; since u is a dominating vertex in C the vertices x, y are also adjacent to u . If $\{x, y\} \in E(G)$ then the vertices $\{u, x, y, v\}$ form a K_4 and hence an odd wheel; if $\{x, y\} \notin E(G)$ then $\{u, x, y, v\}$ is a diamond. Since the output of the reduction algorithm is diamond-subgraph-free and odd-wheel-subgraph-free, every connected component C of $G - X$ must have a dominating vertex u such that $C - \{u\}$ has degree at most one: thus $G - X \in \text{WINDMILL}$ which concludes the proof. \square

Lemma 8. *WINDMILL graphs satisfy the conditions of Theorem 1 and therefore q -COLORING on WINDMILL + kv graphs admits a polynomial kernel for every fixed q .*

Proof. To see that the class WINDMILL is hereditary, consider a graph $G \in \text{WINDMILL}$ and the effect of deleting a vertex v from a connected component C in the graph G . If v is an isolated vertex then it is easy to see from the definition that $G - \{v\} \in \text{WINDMILL}$. Otherwise, let u be a dominating vertex in component C such that $C - \{u\}$ has maximum degree at most one, which exists since $G \in \text{WINDMILL}$. If $u \neq v$ then the vertex u remains a dominating vertex for C , and the maximum degree of $C \setminus \{u\}$ does not increase by deletion of v . If $u = v$ then by definition $G[N(v)]$ has maximum degree at most one, which

Parameterized graph family	NO-certificate bound		Kernel bitsize bound	
	upper	lower	upper	lower
INDEPENDENT + kv	1	1	$\mathcal{O}(k^q)$	$\Omega(k^{q-1-\varepsilon})$
PATH + kv	∞	∞	$\mathcal{O}(q^k)$	No $\mathcal{O}(k^{f(q)})$
USPLIT + kv	$q + 4^q$	$q/2 + \binom{q}{q/2}$	$\mathcal{O}(k^{2q(q+4^q)})$	$\Omega(k^{q/2-1+\binom{q-2}{q/2-1}-\varepsilon})$
UCOCHORDAL + kv	$(q+1)!$	$q/2 + \binom{q}{q/2}$	$\mathcal{O}(k^{2q(q+1)!})$	$\Omega(k^{q/2-1+\binom{q-2}{q/2-1}-\varepsilon})$
COGRAPH + kv	2^{q^2}	$q/2 + \binom{q}{q/2}$	$\mathcal{O}\left(k^{2q \cdot 2^{q^2}}\right)$	$\Omega(k^{q/2-1+\binom{q-2}{q/2-1}-\varepsilon})$

Table 1: Kernel bounds for q -COLORING on parameterized graph families. The table shows upper- and lower bounds for the sizes of NO-certificates for q -LIST COLORING on graphs in \mathcal{F} , and upper- and lower bounds for the number of bits in kernels for q -COLORING on $\mathcal{F} + kv$ graphs. In the order of the listed graph families, the upper bound on the number of bits needed for kernel representations follows a) from Lemma 1, b) from the existence of an $\mathcal{O}^*(q^k)$ -time FPT algorithm [12], and c,d,e) by squaring the number of vertices that results from Theorem 1. The kernel size upper bounds holds for all values of q , whereas the lower bounds hold for all even $q \geq 4$; they are obtained using the size of a NO-certificate for $(q-2)$ -LIST COLORING with Theorem 4.

implies that $C - \{v\}$ is a disjoint collection of paths on one or two vertices. Since each such path satisfies the conditions of a graph in WINDMILL this shows that WINDMILL is hereditary.

It remains to prove that for any NO-instance (G, L) of q -LIST COLORING on a graph $G \in$ WINDMILL there is a NO-subinstance on at most $f(q) := 2q + 1$ vertices. We show how to mark at most $2q + 1$ vertices such that the answer to the subinstance induced by the marked vertices is NO. Assume without loss of generality that G is connected, and let u be a dominating vertex such that $G - \{u\}$ has maximum degree at most one; such a vertex exists by the definition of WINDMILL. Since $G - \{u\}$ has maximum degree at most one, it is a collection of paths on at most two vertices.

For each possible color assignment to u , it is not possible to properly color the remaining vertices using colors from their lists since (G, L) is a NO-instance. Hence there is at least one component of $G - \{u\}$ to which the coloring cannot be extended, given the color of u . Mark the (at most two) vertices in one such component, and also mark the vertex u . We mark at most two vertices for each of the q possible color assignments to u , and we mark u ; hence we mark at most $2q + 1$ vertices. It is easy to see that the marked vertices induce a NO-subinstance, which concludes the proof. \square

Having supplied the two necessary ingredients, the proof of Theorem 6 is completed. \square

6. Conclusions

We studied the kernelizability of q -COLORING within a hierarchy of structural parameterizations of the input graph, obtaining several positive and neg-

ative results. Our positive results extend to q -LIST COLORING, and of course the negative results do as well since q -LIST COLORING is strictly more general than q -COLORING.

Ever since the first paper on parameterized coloring problems by Cai, it has been known that the complexity of LIST COLORING on a graph class \mathcal{F} and the parameterized complexity of CHROMATIC NUMBER on $\mathcal{F} + kv$ graphs are strongly related: if LIST COLORING on \mathcal{F} is polynomial-time solvable then the resulting parameterized problem lies in FPT [4, Theorem 3.3]. Marx gave a refined view of the interaction between PRECOLORING EXTENSION on \mathcal{F} under parameterizations relating to the number of precolored vertices, and the complexity of CHROMATIC NUMBER under structural parameterizations. The results in this paper give another example of such a connection. We have shown that for graph classes \mathcal{F} closed under disjoint union and vertex deletion, the existence of polynomial kernels for q -COLORING on $\mathcal{F} + kv$ graphs is governed by the behavior of NO-certificates for q -LIST COLORING on graphs in \mathcal{F} : when there is an upper bound $g(q)$ on the size of NO-subinstances then there is a kernel with $\mathcal{O}(k^{q \cdot g(q)})$ vertices, whereas a lower bound on the size of NO-subinstances to $(q - 2)$ -LIST COLORING in the form of an explicit irreducible NO-instance on t vertices, shows that no kernel exists with $\mathcal{O}(k^{t/2-\varepsilon})$ vertices for any $\varepsilon > 0$ unless $\text{NP} \subseteq \text{coNP/poly}$.

To apply our general kernelization upper and lower bound theorems, we proved bounds on the sizes of NO-certificates for q -LIST COLORING on the graph classes PATH, \cup SPLIT, \cup COCHORDAL, and COGRAPH. For the class of paths, no function of q can bound the size of NO-certificates. For other classes we were able to establish the existence of such functions, which grow exponentially with q . The lower bounds show that this exponential dependence on q is necessary, and that therefore the numbers of vertices in kernels for the considered parameterized coloring problems must grow very rapidly with the number of colors used: the degree of the polynomial which represents the kernel size must be exponential in q . It would be interesting to see whether the results we obtained regarding the sizes of NO-certificates for q -LIST COLORING have applications in the field of certifying algorithms (cf. [28]). Table 1 gives an overview of the bounds which were obtained for the various parameterized graph classes.

We conclude with some directions for further work. One could try to find larger classes of graphs with bounded-size NO-certificates for q -LIST COLORING. Since such a class cannot contain all paths, a natural candidate would be the class of P_5 -free graphs, a superclass of cographs in which q -COLORING is known to be polynomial-time solvable for every fixed q [29]. Sandwiched between the cographs and the P_5 -free graphs, one might also consider P_4 -sparse graphs or related graph classes [21, Section 11.4].

The parameter hierarchy we considered uses vertex-deletion distance to well-studied graph classes as the parameter. The question of kernelizability can also be asked for the edge-deletion and edge-completion variants of these parameters [4, 9] which will result in quite a different boundary between tractable and intractable: it is not hard to see that q -COLORING on LINEARFOREST $\pm ke$ graphs admits a polynomial kernel by deleting vertices of degree at most two,

whereas Theorem 2 shows that this is not the case on `LINEARFOREST + kv` graphs. As a final open question it will be interesting to settle the gap between the kernelization upper and lower bounds of q -COLORING on `INDEPENDENT + kv` graphs.

Acknowledgments. We are grateful to an anonymous referee of STACS 2011 [5] who suggested investigating Dell and van Melkebeek-type lower bounds for q -COLORING parameterized by vertex cover.

References

- [1] R. G. Downey, M. R. Fellows, *Parameterized Complexity*, Monographs in Computer Science, Springer, New York, 1999.
- [2] J. Guo, R. Niedermeier, Invitation to data reduction and problem kernelization, *SIGACT News* 38 (1) (2007) 31–45. doi:10.1145/1233481.1233493.
- [3] M. R. Garey, D. S. Johnson, *Computers and Intractability: A Guide to the Theory of NP-Completeness*, W.H. Freeman and Company, New York, 1979.
- [4] L. Cai, Parameterized complexity of vertex colouring, *Discrete Appl. Math.* 127 (3) (2003) 415–429. doi:10.1016/S0166-218X(02)00242-1.
- [5] H. L. Bodlaender, B. M. P. Jansen, S. Kratsch, Cross-composition: A new technique for kernelization lower bounds, in: *Proceedings of the 28th International Symposium on Theoretical Aspects of Computer Science, STACS 2011, Vol. 9 of LIPIcs*, 2011, pp. 165–176. doi:10.4230/LIPIcs.STACS.2011.165.
- [6] C.-K. Yap, Some consequences of non-uniform conditions on uniform classes, *Theor. Comput. Sci.* 26 (1983) 287–300. doi:10.1016/0304-3975(83)90020-8.
- [7] D. Kobler, U. Rotics, Edge dominating set and colorings on graphs with fixed clique-width, *Discrete Appl. Math.* 126 (2-3) (2003) 197–221. doi:10.1016/S0166-218X(02)00198-1.
- [8] F. V. Fomin, P. A. Golovach, D. Lokshtanov, S. Saurabh, Intractability of clique-width parameterizations, *SIAM J. Comput.* 39 (5) (2010) 1941–1956. doi:10.1137/080742270.
- [9] D. Marx, Parameterized coloring problems on chordal graphs, *Theor. Comput. Sci.* 351 (3) (2006) 407–424. doi:10.1016/j.tcs.2005.10.008.
- [10] J. Kratochvíl, Precoloring extension with fixed color bound, *Acta Math. Univ. Comenian.* 62 (2) (1993) 139–153.
- [11] H. L. Bodlaender, K. Jansen, G. J. Woeginger, Scheduling with incompatible jobs, *Discrete Appl. Math.* 55 (3) (1994) 219–232. doi:10.1016/0166-218X(94)90009-4.

- [12] H. L. Bodlaender, A. M. C. A. Koster, Combinatorial optimization on graphs of bounded treewidth, *Comput. J.* 51 (3) (2008) 255–269. doi:10.1093/comjnl/bxm037.
- [13] M. R. Fellows, D. Lokshtanov, N. Misra, M. Mnich, F. A. Rosamond, S. Saurabh, The complexity ecology of parameters: An illustration using bounded max leaf number, *Theory Comput. Syst.* 45 (4) (2009) 822–848. doi:10.1007/s00224-009-9167-9.
- [14] J. Fiala, P. A. Golovach, J. Kratochvíl, Parameterized complexity of coloring problems: Treewidth versus vertex cover, *Theor. Comput. Sci.* 412 (23) (2011) 2513–2523. doi:10.1016/j.tcs.2010.10.043.
- [15] M. R. Fellows, F. V. Fomin, D. Lokshtanov, F. A. Rosamond, S. Saurabh, S. Szeider, C. Thomassen, On the complexity of some colorful problems parameterized by treewidth, *Inf. Comput.* 209 (2) (2011) 143–153. doi:10.1016/j.ic.2010.11.026.
- [16] H. L. Bodlaender, R. G. Downey, M. R. Fellows, D. Hermelin, On problems without polynomial kernels, *J. Comput. Syst. Sci.* 75 (8) (2009) 423–434. doi:10.1016/j.jcss.2009.04.001.
- [17] B. Chor, M. R. Fellows, D. W. Juedes, Linear kernels in linear time, or how to save k colors in $\mathcal{O}(n^2)$ steps, in: *Proceedings of the 30th International Workshop on Graph-Theoretic Concepts in Computer Science, WG 2004*, Vol. 3353 of *Lecture Notes in Computer Science*, 2004, pp. 257–269. doi:10.1007/978-3-540-30559-0_22.
- [18] H. L. Bodlaender, Kernelization: New upper and lower bound techniques, in: *Proceedings of the 4th International Workshop on Parameterized and Exact Computation, IWPEC 2009*, Vol. 5917 of *Lecture Notes in Computer Science*, 2009, pp. 17–37. doi:10.1007/978-3-642-11269-0_2.
- [19] L. Fortnow, R. Santhanam, Infeasibility of instance compression and succinct PCPs for NP, *J. Comput. Syst. Sci.* 77 (1) (2011) 91–106. doi:10.1016/j.jcss.2010.06.007.
- [20] H. Dell, D. van Melkebeek, Satisfiability allows no nontrivial sparsification unless the polynomial-time hierarchy collapses, in: *Proceedings of the 42nd ACM Symposium on Theory of Computing, STOC 2010*, 2010, pp. 251–260. doi:10.1145/1806689.1806725.
- [21] A. Brandstädt, V. B. Le, J. P. Spinrad, *Graph Classes: A Survey*, Society for Industrial and Applied Mathematics, Philadelphia, PA, USA, 1999.
- [22] K. Jansen, P. Scheffler, Generalized coloring for tree-like graphs, *Discrete Appl. Math.* 75 (2) (1997) 135–155. doi:10.1016/S0166-218X(96)00085-6.

- [23] D. Lokshtanov, D. Marx, S. Saurabh, Known algorithms on graphs on bounded treewidth are probably optimal, in: Proceedings of the 22nd Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2011, 2011, pp. 777–789. [arXiv:1007.5450](#).
- [24] D. E. Knuth, Axioms and hulls, Springer-Verlag, 1992.
- [25] Z. Tuza, Graph colorings with local constraints - a survey, Math. Graph Theory 17 (1997) 161–228.
- [26] F. V. Fomin, D. Lokshtanov, V. Raman, S. Saurabh, Bidimensionality and EPTAS, in: Proceedings of the 22nd Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2011, 2011, pp. 748–759. [arXiv:1005.5449](#).
- [27] D. Marx, Parameterized complexity and approximation algorithms, Comput. J. 51 (1) (2008) 60–78. [doi:10.1093/comjnl/bxm048](#).
- [28] D. Bruce, C. T. Hoàng, J. Sawada, A certifying algorithm for 3-colorability of P_5 -free graphs, in: Proceedings of the 20th International Symposium on Algorithms and Computation, ISAAC 2009, Vol. 5878 of Lecture Notes in Computer Science, 2009, pp. 594–604. [doi:10.1007/978-3-642-10631-6_61](#).
- [29] C. T. Hoàng, M. Kaminski, V. V. Lozin, J. Sawada, X. Shu, Deciding k -colorability of P_5 -free graphs in polynomial time, Algorithmica 57 (1) (2010) 74–81. [doi:10.1007/s00453-008-9197-8](#).