CONDITIONAL SUM-PRODUCT NETWORKS: IMPOSING STRUCTURE ON DEEP PROBABILISTIC ARCHITECTURES

Xiaoting Shao¹, Alejandro Molina¹, Antonio Vergari³ Karl Stelzner¹, Robert Peharz⁴, Thomas Liebig⁵, Kristian Kersting^{1, 2} ¹CS Department, and ²Centre for Cognitive Science, TU Darmstadt, Germany, ³CS Department, UCLA, USA

¹CS Department, and ²Centre for Cognitive Science, TU Darmstadt, Germany, ³CS Department, UCLA, USA ⁴CBL Lab, University of Cambridge, UK, ⁵CS Department, TU Dortmund, Germany

ABSTRACT

Probabilistic graphical models are a central tool in AI; however, they are generally not as expressive as deep neural models, and inference is notoriously hard and slow. In contrast, deep probabilistic models such as sum-product networks (SPNs) capture joint distributions in a tractable fashion, but still lack the expressive power of intractable models based on deep neural networks. Therefore, we introduce conditional SPNs (CSPNs), conditional density estimators for multivariate and potentially hybrid domains which allow harnessing the expressive power of neural networks while still maintaining tractability guarantees. One way to implement CSPNs is to use an existing SPN structure and condition its parameters on the input, e.g., via a deep neural network. This approach, however, might misrepresent the conditional independence structure present in data. Consequently, we also develop a structure-learning approach that derives both the structure and parameters of CSPNs from data. Our experimental evidence demonstrates that CSPNs are competitive with other probabilistic models and yield superior performance on multilabel image classification compared to mean field and mixture density networks. Furthermore, they can successfully be employed as building blocks for structured probabilistic models, such as autoregressive image models.

1 Introduction

Probabilistic models are a fundamental approach in machine learning and artificial intelligence to represent and distill meaningful representations from data with inherent structure. In practice, however, it has been challenging to come up with probabilistic models that balance three desirable goals: 1) being expressive enough to capture the complexity of real-world distributions; 2) maintain—at least on a high level—interpretable domain structure; and 3) permit a rich set of tractable inference routines.

Probabilistic graphical models (PGMs), for example, admit an interpretable structure, but are known to achieve a bad trade-off between expressivity and tractable inference [Koller and Friedman, 2009]. Probabilistic models based on deep neural networks such as variational autoencoders (VAEs) [Kingma and Welling, 2014] and generative adversarial networks (GANs) [Goodfellow *et al.*, 2014] are highly expressive, but generally lack interpretable structure and have limited capabilities when it comes to probabilistic inference. Meanwhile, advances in deep probabilistic learning have shown that tractable models like arithmetic circuits [Darwiche, 2003] and sum-product networks [Poon and Domingos, 2011] can be used to capture complex distributions, while maintaining a rich set of tractable inference routines.

How can we combine these lines of research, in order to strive for a sensible balance between expressivity, structure, and tractable inference? This question has received surprisingly little attention, yet. Johnson *et al.* (2016) combine VAEs with PGMs, and thus effectively equip expressive neural-based models with a rich structure. However, inference remains intractable in these models. Shen *et al.* (2019) proposed structured Bayesian networks, which impose structure among clusters of variables using probabilistic sentential decision diagrams (PSDDs) to model high-dimensional conditional distributions [Shen *et al.*, 2018]. While this yields well-structured models with a wide range of tractable inference scenarios, so far they are restricted to binary data and do not establish a link to deep neural networks. Moreover, PSDDs are a more restricted than SPNs. Recently and independent of us, Rahman *et al.* (2019) proposed conditional






Figure 1: Imposing structure on deep probabilitic architectures. (Left) An Autoregressive Block-wise CSPN (ABCSPN) factorizes a distribution over images along image patches. (Right) Samples generated by an ABCSPN (top) and a PixelCNN++ (bottom) trained on Olivetti faces.

cutset networks, which are a strict sub-class of SPNs, do not employ conditional independency tests for learning, nor conditioning on deep neural networks.

In this paper, we introduce conditional sum-product networks (CSPNs), a conditional variant of SPNs which can harness the expressive power of universal function approximators such as neural networks, while still maintaining a wide range of inference routines. Moreover, CSPNs can be naturally used as building blocks in order to impose structure on probabilistic deep learning models. We formally define CSPNs, provide a learning framework for them, and provide arguments for why CSPNs are more compact than SPNs.

We also consider neural CSPNs, which rely on random SPN structures parameterized by the output of deep neural networks. While this approaches does not have the benefit of carefully learned structures, it gains expressiveness through increased model size.

Finally, we note that CSPNs can be naturally combined with other (C)SPNs to impose a rich structure on high-dimensional joint distributions. We illustrate this by introducing autoregressive SPNs for conditional image generation, modelling images block by block, decomposing the joint image distribution into a product of (C)SPNs, cf. Fig. 1.

To summarize, we make the following contributions:

- We introduce CSPNs as a deep tractable model for modelling multivariate, conditional probability distributions $P(\mathbf{Y} \mid \mathbf{X})$ over mixed variables \mathbf{Y} , by introducing gating nodes as mixtures with functional mixing coefficients.
- We present a structure learning algorithm for CSPNs based on randomized conditional correlation tests (RCoT) which allows to learn structures from heterogeneous data sources.
- We connect CSPNs with deep neural networks, and demonstrate that the improved ability of the resulting neural CSPNs to model dependencies results in increased multilabel image classification performance.
- We illustrate how CSPNs may be used to build structured probabilistic models by introducing ABCSPNs, autoregressive image models based on CSPNs.

We proceed as follows. We start off by discussing related work in more detail. Then we introduce CSPNs, show how to learn their structure using RCoT, and devise autoregressive SPNs. Before concluding, we present our experiments.

2 Conditional Probabilistic Modeling

In this paper, we are interested in predicting a collection of random variables \mathbf{Y} given inputs \mathbf{X} , i.e. we are interested in the problem of *structured output prediction* (SOP). In the probabilistic setting, SOP translates to modeling and learning a high-dimensional conditional distribution $P(\mathbf{Y} \mid \mathbf{X})$. While one could learn a univariate predictor for each variable $Y \in \mathbf{Y}$ separately, this approach assumes complete independence among \mathbf{Y} . This mean field assumption is often violated but still frequently used.

Gaussian Processes (GPs) [Rasmussen, 2003] and Conditional Random Fields (CRFs) [Lafferty et al., 2001] are more expressive alternatives.

However, they have serious shortcomings when inference has to scale to high-dimensional data or many samples.

One approach to scale GPs to larger datasets are deep mixtures of GPs, introduced in [Trapp *et al.*, 2018], which can be seen as a combination of GPs and SPNs. However, while partially alleviating GP inference scalability issues, they are limited to continuous domains, while CSPNs can learn conditional distributions over heterogeneous data, i.e., where Y might contain discrete or continuous random variables, or be of mixed data types. In a nutshell, CSPNs can tackle *unrestricted* SOP in a principled probabilistic way.

As an alternative within the family of tractable probabilistic models, logistic circuits (LCs) have been recently introduced as discriminative models [Liang and Van den Broeck, 2019], showing classification accuracy competitive to neural nets on a series of benchmarks. However, LCs and discriminative learning of SPNs [Gens and Domingos, 2012] are limited to single output prediction. Likewise, discriminative arithmetic circuits (DACs) also directly tackle modeling a conditional distribution [Rooshenas and Lowd, 2016]. They are learned via compilation of CRFs, requiring sophisticated and potentially slow structure learning routines. Also related are sum-product-quotient networks (SPQNs) [Sharir and Shashua, 2017], which extend SPNs by introducing quotient nodes. This enables SPQNs to represent a conditional distribution $P(\mathbf{Y} | \mathbf{X})$ as the ratio $P(\mathbf{Y}, \mathbf{X})/P(\mathbf{X})$ where the two terms are modeled by two SPNs. However, SPQNs do not incorporate neural networks, so that CSPNs can represent this ratio more compactly.

Our neural CSPNs are close in spirit to probabilistic models based on neural networks. Generally, this line of research faces the challenge of how to parameterize distributions using the outputs of deterministic neural function approximators. Frequently, the mean field assumption is made, interpreting the output of the network as the parameters of primitive univariate distributions, assuming independence among random variables. Modelling complex distributions must then involve sampling as in VAEs [Kingma and Welling, 2014] or hierarchical variational models [Ranganath *et al.*, 2016], causing significant computational overhead and yielding highly intractable models. Other approaches for conditional density estimation based on neural networks include (conditional) normalizing flows, which yield tractable likelihoods, but are limited to continuous distributions and come with significant computational costs for computing the determinant of the Jacobian [Rezende and Mohamed, 2015].

Generally, CSPNs are most closely related to two classic approaches, namely mixture density networks (MDNs) [Bishop, 1994] and mixtures of experts (MoEs), in particular their hierarchical variant [Jordan and Jacobs, 1994]. These models use the output of neural networks to parameterize a (typically Gaussian) mixture model. Shallow mixture models however are often inadequate in high dimensions, as the number of components required to accurately model the data may grow exponentially with the number of dimensions [Delalleau and Bengio, 2011]. SPNs address this by instead encoding a hierarchy of mixtures, alternating between sums and products. Neural CSPNs may consequently be seen as a deep, hierarchical version of MDNs and MoEs.

3 (Unconditional) Sum-Product Networks

Before introducing our conditional sum-product networks (CSPNs), we briefly review classical (unconditional) SPNs. For further details on SPNs, see [Darwiche, 2003; Poon and Domingos, 2011; Peharz *et al.*, 2017]. In the following, we denote random variables (RVs) as upper-case letters, e.g., V, their values as lower-case letters, e.g., $v \sim V$; and sets of RVs in bold, e.g., $\mathbf{v} \sim \mathbf{V}$.

A sum-product network (SPN) over a set of random variables \mathbf{V} is defined via an acyclic directed graph (DAG) containing three types of nodes: distribution nodes, sum nodes and product nodes. All leaves of the DAG are distribution nodes, and all internal nodes are either sums or products. An SPN leaf represents a univariate distribution P(Y) for some RV $Y \in \mathbf{V}$. A sum node represents a $mixture \sum_k w_k P_k(\mathbf{Y})$, where P_k are the children of the sum node according to the DAG, and where $w_k \geq 0$, and $\sum_k w_k = 1$. We require that sum nodes are complete, i.e. that all children are defined over the same $scope \mathbf{Y}$. A product node represents a $factorization \prod_k P_k(\mathbf{Y}_k)$, where P_k are the children of the product node according to the DAG. We require that product nodes are factorization mix product nodes are <math>factorization mix product nodes product hat all children are defined over <math>factorization mix product nodes product hat <math>factorization mix product nodes product hat <math>factorization mix product nodes product nodes product nodes <math>factorization mix product nodes product nodes product nodes product nodes <math>factorization mix product nodes pr

In comparison to classical probabilistic graphical models, SPNs have the advantage that they can represent certain distributions much more succinct, even if the corresponding graphical model would have very high tree-width [Koller and Friedman, 2009]. Furthermore, *inference routines* such as *marginalization* and *conditioning* can be tackled in linear time w.r.t. the network size [Darwiche, 2003; Poon and Domingos, 2011; Peharz *et al.*, 2015].

These tasks can also be *compiled*, i.e., starting from an SPN representing $P(\mathbf{V})$, it is possible to generate a new SPN representing the marginal distribution for an arbitrary $\mathbf{X} \subset \mathbf{V}$, potentially conditioned on event $\mathbf{Y} = \mathbf{y}$, for any $\mathbf{Y} \subset \mathbf{V}$, $\mathbf{Y} \cap \mathbf{X} = \emptyset$.

Indeed, one way to represent conditional distribution $P(\mathbf{Y} \mid \mathbf{X})$ is to train a regular SPN on the joint $P(\mathbf{V})$, and to then compile it into a conditional distribution for each input \mathbf{x} of interest. It is clear, however, that this will generally deliver sub-optimal results, since the network will not be specialized to the specific input-output pair of \mathbf{X} and \mathbf{Y} . Intuitively,




Figure 2: Overview of the architecture (left) and a concrete CSPN example encoding $P(\mathbf{Y} \mid \mathbf{X})$ (right). \mathbf{X} is the set of conditional variables and \mathbf{Y} consists of three RVs Y_1, Y_2 and Y_3 . Each color of the arrow represents one data flow. Here, the gating weights, possibly also leaf nodes, are parameterized by the output of a neural networks given \mathbf{X} .

training the full joint $P(\mathbf{V})$ optimizes *all* possible conditional distributions one can derive from the joint. Thus, when we are interested in learning a conditional distribution for a set of input and output variables \mathbf{X} and \mathbf{Y} known a-priori, directly learning a conditional distribution, as discussed in the following, can be expected to deliver better results.

4 Conditional Sum-Product Networks

We now introduce a notion of conditional SPNs (CSPNs), which structurally reflect conditional independencies, and propose a learning framework to induce CSPNs from data. To this end, we employ $\mathbf{Y} \subset \mathbf{V}$ to denote the target RVs, also called labels, while we denote the disjoint set of observed RVs, also called features, as $\mathbf{X} := \mathbf{V} \setminus \mathbf{Y}$.

Definition of Conditional SPNs (CSPNs). We define a CSPN as a rooted DAG containing three types of nodes, namely *leaf*, *gating*, and *product* nodes, encoding a conditional probability distribution $P(\mathbf{Y} \mid \mathbf{X})$. See Fig. 2 for an illustrative example of a CSPN. Each leaf encodes a normalized univariate conditional distribution $P(Y \mid \mathbf{X})$ over a target RV $Y \in \mathbf{Y}$, where Y is denoted as the leaf's *conditional scope*.

A product node factorizes a conditional probability distribution over its children, i.e., $\prod_k P_k(\mathbf{Y}_k \mid \mathbf{X})$ where $\mathbf{Y}_k \subset \mathbf{Y}$. To encode functional dependencies on the input features, a *gating* node computes $\sum_k g_k(\mathbf{X}) P_k(\mathbf{Y} \mid \mathbf{X})$ where g_k is the output of a nonnegative function g w.r.t. the k-th child node, such that $\sum_k g_k(\mathbf{X}) = 1$. Standard sum nodes may still be realized by choosing a constant gating function. The conditional scope of a non-leaf node is the union of the conditional scopes of its children.

Gating nodes are akin to gates in *mixtures of experts* [Shazeer *et al.*, 2017], which motives the name. The notions of completeness and decomposability of SPNs [Poon and Domingos, 2011] naturally carry over to CSPNs, and we can reuse the efficient SPN inference routines, guaranteeing that any conditional marginal probability may be computed exactly in linear time [Rooshenas and Lowd, 2016].

This can easily be verified by considering that for a fixed input x, a CSPN reduces to a standard SPN over the labels Y, allowing any inference routine for standard SPNs [Poon and Domingos, 2011; Peharz *et al.*, 2015; Vergari *et al.*, 2018] to be employed.

CSPNs are More Compact than SPNs. It is known that neural networks are universal approximators, i.e., they can approximate any function to an arbitrary small error. As Choi and Darwiche (2018) argue, a probabilistic model¹ represents not only one function, but a function for each possible probabilistic query. Furthermore, as they argue, the functions corresponding to queries are, unlike neural networks, not universal approximators, as they are restricted to multi-linear functions of primitive distributions or quotients thereof. While complex distributions may still be fit using a large number of e.g. Gaussian leaf distributions, this is wasteful if only a conditional distribution is required.

The gating nodes of CSPNs extend SPNs in a way that allows them to also induce functions which are universal approximators. For instance, using threshold gates $x_i \le c$ ($c \in \mathbb{R}$), one can realize testing arithmetic circuits [Choi and Darwiche, 2018] which have been proven to be universal approximators. Within CSPNs we could for example also use single-output softmax gates in order to facilitate modelling mixtures of experts models in the form of Nguyen

¹In their exposition, they focus on Bayesian networks and arithmetic circuits, but their arguments carry over to SPNs as well.

Algorithm 1 LearnCSPN $(\mathcal{D}, \eta, \alpha)$

```
Require: data \mathcal{D} = \{(\mathbf{y}_i, \mathbf{x}_i) | \mathbf{y}_i \in \mathbf{Y}, \mathbf{x}_i \in \mathbf{X}\}_{i=1}^N where \mathbf{y}_i = (y_i^1, \cdots, y_i^{c_y}), and \mathbf{x}_i = (x_i^1, \cdots, x_i^{c_x}); \eta: min number of instances to split; \alpha: threshold of significance

Ensure: a CSPN S encoding P(\mathbf{Y} | \mathbf{X}) learned from \mathcal{D}

1: if |\mathbf{Y}| = 1 then

2: S \leftarrow \text{LearnConditionalLeaf}(\mathcal{D}) using, e.g., GLMs

3: else if |\mathcal{D}| < \eta then

4: S \leftarrow \prod_{j=1}^{|\mathbf{Y}|} \text{LearnCSPN}(\{(y_i^j, \mathbf{x}_i)\}_{i=1}^N, \eta, \alpha)

5: else

6: \{\mathbf{V}_k\}_{k=1}^K \leftarrow \text{SplitLabels}(\mathcal{D}, \alpha) // compare Alg. 2

7: if K > 1 then

8: \mathcal{D}_k \leftarrow \{\mathbf{v}_k^m | \mathbf{v}_k^m \sim \mathbf{V}_k\}_{m=1}^M

9: S \leftarrow \prod_{k=1}^K \text{LearnCSPN}(\mathcal{D}_k, \eta)

10: else

11: \{\mathcal{D}_k\}_{k=1}^K \leftarrow \text{SplitInstances}(\mathcal{D}) e.g. using random splits or k-Means with an appropriate metric

12: S \leftarrow \sum_{k=1}^K g_k(x) \cdot \text{LearnCSPN}(\mathcal{D}_k, \eta), x \in D where g_k(x) is a gating function

13: return S
```

Algorithm 2 SplitLabels (\mathcal{D}, α)

```
Require: data \mathcal{D} = \{(\mathbf{y}_i, \mathbf{x}_i) | \mathbf{y}_i \in \mathbf{Y}, \mathbf{x}_i \in \mathbf{X}\}_{i=1}^N where the label RVs are \mathbf{Y} = \{Y_1, \dots, Y_P\}, \alpha: threshold of significance

Ensure: a label partitioning \{\mathcal{P}_{\mathcal{D}}\}

1: \mathcal{G} \leftarrow \operatorname{Graph}(\{\})

2: for each Y_i, Y_j \in \mathbf{Y} do

3: S_{i,j} \leftarrow M \|\hat{\Sigma}_{Y_i Y_j \cdot \mathbf{X}}\|_F^2

4: if LindsayPillaBasak(S_{i,j}) > \alpha then

5: \mathcal{G} \leftarrow \mathcal{G} \cup \{(i,j)\}

6: return ConnectedComponents(\mathcal{G})
```

et al. (2016). This provides an alternative univeral approximation result, which shows that the class of CSPNs mean functions is dense in the class of all continuous functions over arbitrary compact domains.

5 Learning Conditional SPNs

A simple way to construct CSPNs representing $P(\mathbf{Y} | \mathbf{X})$ is to start from a standard SPN over \mathbf{Y} , and to make its parameters (i.e., the sum weights and parameters of leaf distributions) functional of input \mathbf{x} , defining $P(\mathbf{Y} | \mathbf{X} = \mathbf{x}) = P(\mathbf{Y}; \theta)$, where parameters $\theta = f(\mathbf{x})$ are a function of the input \mathbf{x} . For f we might use arbitrary function representations, such as deep neural networks. This architecture, which we call *neural* CSPN, works reasonable well, as we demonstrate in the experimental section. However, it fails to exploit conditional independencies in the structure. We introduce a structure learning strategy extending the established LearnSPN algorithm [Gens and Domingos, 2013] which has been instantiated several times for learning (unconditional) SPNs under different distributional assumptions [Vergari et al., 2015; Molina et al., 2018].

Our *LearnCSPN* routine builds a CSPN top-down by introducing nodes while partitioning a data matrix whose rows represent samples and columns RVs in a recursive and greedy manner. LearnCSPN is sketched in Alg. 1. It creates one of the three node types at each step: (1) a leaf, (2) a product, or (3) a gating node. If only one target RV Y is present, one conditional probability distribution can be fit as a leaf. To generate product nodes, conditional independencies are found by means of a statistical test to partition the set of target RVs Y. If no such partitioning is found, then training samples are partitioned into clusters (conditioning) to induce a gating node. We now review the three steps of LearnCSPN more in detail.

(1) **Learning Leaves.** In order to allow for tractable inference, we require conditional models at the leaves to be normalized. Apart from this requirement, *any* such univariate tractable conditional model may be plugged in a CSPN effortlessly to model $P(Y | \mathbf{X})$. This can be simple univariate models or the joint output of a deep model.

In this paper, we use Generalized Linear Models (GLMs) [McCullagh, 1984] as leaves, due to their simple and flexible nature. We compute $P(y | \mu = \text{glm}(\mathbf{X}))$ by regressing univariate parameters μ from features \mathbf{X} , for a given set of distributions in the exponential family.

(2) Learning Product Nodes. For product nodes, we are interested in decomposing the labels \mathbf{Y} into subsets via conditional independence (CI). In terms of density functions, testing that RVs Y_i are independent of Y_j given $\mathbf{X} = \mathbf{x}$, for any value of \mathbf{x} , i.e., $Y_i \perp \!\!\! \perp Y_j \mid \mathbf{X}$, can equivalently be characterized as $p(Y_i, Y_j \mid \mathbf{X}) = p(Y_i \mid \mathbf{X})p(Y_j \mid \mathbf{X})$.

Since we aim to accommodate arbitrary leaf conditional distributions in CSPNs, regardless of their parametric likelihood models or data types (i.e. discrete or continuous), we adopt a non-parametric pairwise CI test procedure to decompose labels Y. Kernel-based methods like KCIT [Zhang *et al.*, 2011] and PCIT [Doran *et al.*, 2014] would be an adequate and powerful choice, but scale unfortunately quadratically in the sample size. For this reason, we employ a randomized approximation of KCIT, the randomized conditional correlation test (RCoT) [Strobl *et al.*, 2019], which has been shown to deliver very similar results as KCIT and PCIT, while scaling only linearly in the sample size.

Briefly, RCoT computes the same statistics as KCIT, i.e., the squared Hilbert-Schmidt norm of the partial cross-covariance operator but uses the Lindsay-Pilla-Basak method to approximate the asymptotic distribution. In order to do that, RCoT specifies conditional independence using characteristic kernels (e.g. RBFs, Laplacian) $k_{\mathcal{Y}_i}, k_{\mathcal{Y}_j}, k_{\mathcal{X}}$ for variables Y_i, Y_j, \mathbf{X} from domains $\mathcal{Y}_i, \mathcal{Y}_j, \mathcal{X}$ and denote their corresponding RKHS by $\mathcal{H}_{\mathcal{Y}_i}, \mathcal{H}_{\mathcal{Y}_i}, \mathcal{H}_{\mathcal{X}}$. Then it employs the cross-covariance operator on the RKHS from $\mathcal{H}_{\mathcal{Y}_i}$ to $\mathcal{H}_{\mathcal{Y}_j}$ which is defined as $\langle f, \sum_{Y_i Y_j} g \rangle = \mathbb{E}_{Y_i Y_j} [f(Y_i)g(Y_j)] - \mathbb{E}_{Y_i} [f(Y_i)] \mathbb{E}_{Y_j} [g(Y_j)]$ for all $f \in \mathcal{H}_{\mathcal{Y}_i}$ and $g \in \mathcal{H}_{\mathcal{Y}_j}$. The partial cross-covariance operator $\sum_{Y_i Y_j \cdot \mathbf{X}} \mathbf{X}$ of (Y_i, Y_j) given \mathbf{X} can then be written as $\sum_{Y_i Y_j \cdot \mathbf{X}} = \sum_{Y_i Y_j} - \sum_{Y_i \mathbf{X}} \sum_{\mathbf{X} \mathbf{X}} \sum_{\mathbf{X} \mathbf{Y}_j}$. Under mild assumptions, it then holds: if $Y_i \perp Y_j | \mathbf{X}$ then $\mathbb{E}_{\mathbf{X}} [P(Y_i Y_j \mid \mathbf{X})] = \mathbb{E}_{\mathbf{X}} [P(Y_i \mid \mathbf{X}) P(Y_j \mid \mathbf{X})]$ and in turn $\sum_{Y_i Y_j \cdot \mathbf{X}} = 0^{-2}$. Refer to [Strobl et al., 2019] for further details.

In the end, we create a graph where the nodes are RVs in Y and put an edge between two nodes Y_i, Y_j if we cannot reject the null hypothesis that $Y_i, Y_j \perp \!\!\! \perp X$ for a given threshold α . The conditional scopes of product children are then given by connected components of this graph, akin to [Gens and Domingos, 2013], cf. Alg. 2.

(3) Learning Gating Nodes. Gating nodes provide a mechanism to condition on \mathbf{X} , enhancing flexibility. We first select a functional form for the gating function $g_k(\mathbf{X})$, ideally, a differentiable parametric one such as logistic regression or a neural network. This function is restricted to allow for a proper mixture of distributions, i.e., $\sum_k g_k(\mathbf{X}) = 1$ and $\forall_{\mathbf{X}} q_k(\mathbf{X}) >= 0$.

For structure learning, we perform clustering over features \mathbf{X} , and denote the corresponding member assignment as a one-hot coded vector \mathbf{Z} . To this end, one can exploit any clustering scheme based on the available knowledge of the data distribution (e.g., k-Means for Gaussians). We can also leverage random splits, as in random projection trees [Dasgupta and Freund, 2008].

We then proceed to fit the gating function to predict $\mathbf{Z}_k = g_k(\mathbf{X})$. This is a generalization over sum nodes, where $g_k(\mathbf{X}) = c$ that is, the mixtures are constants independent of \mathbf{X} . This functional mixing does not break the tractability guarantees over \mathbf{Y} as \mathbf{X} is always assumed to be evidence in the conditional case.

End-to-End Parameter Optimization. The CSPNs described here contain two sets of parameters: one for the weights of the gating nodes, and one for the parameters of the leaf distributions. **LearnCSPN** in Alg. 1 automatically sets the parameters of the gating function as described above. The parameters of the GLMs are obtained by an Iteratively Reweighted Least Squares (IRWLS) algorithm as described in [Green, 1984], on the instances available at the *leaf* node. However, those parameters are locally optimized and usually not optimal for the global distribution. Fortunately, CSPNs are differentiable as long as the leaf models and gating functions are differentiable. Hence, one can optimize the conditional likelihood in an end-to-end fashion using gradient based optimization techniques. We follow this approach for training neural CSPNs.

6 ABCSPN: Autoregressive Block-wise CSPN

To illustrate how to impose structure on generative models by employing CSPNs as building blocks, in the same way as Bayesian networks represent a joint distribution as a factorization of conditional models, we build an autoregressive model composed of CSPNs. By applying the chain rule of probabilities, we can decompose a joint distribution as the

Indeed, there are some special cases where $Y_i \not\perp \!\!\! \perp Y_j | \mathbf{X}$ yet $\sum_{Y_i Y_j \cdot \mathbf{X}} = 0$, i.e., this is not an equivalence relation. However, these cases are rarely encountered in practice.

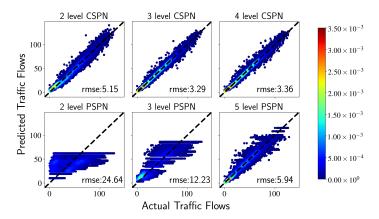


Figure 3: Comparing traffic flow predictions (RMSE, the lower the better) of Poisspn CSPNs (top) versus SPNs (botton, PSPNs) for shallow (left) or deep models (center and right). CSPNs are consistently more accurate than corresponding SPNs and, as expected, deeper CSPNs outperform shallow ones (center and right). (Best viewed in color)

product $P(\mathbf{Y}, \mathbf{X}) = P(\mathbf{Y} \mid \mathbf{X})P(\mathbf{X})$. Then, one could learn an SPN to model $P(\mathbf{X})$ and a CSPN for $P(\mathbf{Y} \mid \mathbf{X})$. By combining both models using a single product node, we represent the whole joint as a computational graph.

Now, if one applies the same operation several times by repeatedly partitioning \mathbf{Y} in a series of disjoint sets $\mathbf{Y}_1, \mathbf{Y}_2, \ldots$ we can obtain an *autoregressive* model representation. Inspired by image autoregressive models like PixelCNN [van den Oord *et al.*, 2016a], and PixelRNN [van den Oord *et al.*, 2016b] we propose an *Autoregressive Block-wise CSPN* (ABCSPN) for conditional image generation. For one ABCSPN, we divide images into pixel blocks, hence factorizing the joint distribution block-wise instead of pixel-wise as in PixelC/RNN. Each factor accounting for a block of pixels is then a CSPN representing the distribution of those pixels as conditioned on all previous blocks and on the class labels.³

We factorize blocks in raster scan order, row by row and left to right, but any other ordering is also possible. The complete generative model over image I encodes: $p(\mathbf{I}) = \prod_{i=1}^n p(\mathbf{B}_i \,|\, \mathbf{B}_1, \dots, \mathbf{B}_{i-1}, \mathbf{C}) \cdot p(\mathbf{C})$ where \mathbf{B}_i denotes the pixel RVs of the *i*-th block and \mathbf{C} the one-hot coded image class. Learning each conditional block as a CSPN can be done by the structure learning routines introduced above.

7 Experimental Evaluation

Here we investigate CSPNs in experiments on real-world data. Specifically, we aim to answer the following questions: (Q1) Can CSPNs perform better than regular SPNs? (Q2) How accurate are CSPNs for SOP? (Q3) How do ABC-SPNs perform w.r.t. state-of-the-art generative models? (Q4) Do neural CSPNs outperform baseline neural conditional models such as MDNs on image SOP tasks?

To this end, we implemented CSPNs in Python calling TensorFlow and R.

(Q1, Q2) Multivariate Traffic Data Prediction. We employ CSPNs for multivariate traffic data prediction, comparing them against SPNs with Poisson leaf distributions [Molina *et al.*, 2017]. This is an appropriate model as the traffic data represents counts of vehicles. We considered temporal vehicular traffic flows in the German city of Cologne [Ide *et al.*, 2015]. The data comprises 39 RVs whose values are from stationary detectors located at the 50km long Cologne orbital freeway, each one counting the number of vehicles within a fixed time interval.

It contains 1440 samples, each of which is a snapshot of the traffic flow. The task of the experiments is to predict the next snapshot ($|\mathbf{Y}| = 39$) given a historical one ($|\mathbf{X}| = 39$).

We trained both CSPNs and SPNs controlling the depth of the models. The CSPNs use GLMs with exponential link function as parameter for a Poisson univariate conditional leaf. Results are summarized in Fig. 3. We can see that CSPNs are always the most accurate model as their root mean squared error (RMSE) is always the lowest. As expected, deeper CSPNs have lower predictive error compared to shallow CSPNs. Moreover smaller CSPNs perform equally well or even better than SPNs, empirically confirming that CSPN are more expressive than SPNs. This answers (Q1, Q2) affirmatively and also provides evidence for the convenience of directly modeling a conditional distribution.

³Here, image labels play the role of observed RVs in X.

Table 1: Average test conditional log-likelihood (CLL) of DACL and CSPN on 20 standard density estimation benchmarks. Significantly better results (t-test,p < 0.05) are bold. As the number of wins, draws and losses (W/D/L) of CSPNs shows, CSPNs are competitive to DACL.

	50% Evidence		80% Evidence		
Dataset	DACL	CSPN	DACL	CSPN	
Nltcs	-2.770	-2.795	-1.255	-1.256	
Msnbc	-2.918	-3.165	-1.557	-1.684	
KDD	-0.998	-1.023	-0.386	-0.397	
Plants	-4.655	-4.720	-1.812	-1.683	
Audio	-18.958	-18.543	-7.337	-7.110	
Jester	-24.830	-24.543	-9.998	-9.830	
Netflix	-26.245	-25.914	-10.482	-10.351	
Accidents	-9.718	-11.587	-3.493	-4.045	
Retail	-4.825	-5.600	-1.687	-1.654	
Pumsb.	-6.363	-7.383	-2.594	-2.618	
Dna	-34.737	-38.243	-12.116	-11.895	
Kosarek	-5.053	-5.527	-2.549	-2.397	
MSWeb	-5.653	-6.686	-1.333	-1.335	
Book	-16.801	-10.653	-6.817	-3.191	
EachMovie	-25.325	-18.130	-9.403	-4.579	
WebKB	-72.072	-18.542	-28.087	-2.623	
Reuters-52	-41.544	-15.736	-17.143	-3.878	
20News	-76.063	-35.900	-27.918	-4.984	
Bbc	-118.684	-47.138	-44.811	-2.996	
Ad	-4.893	-6.290	-1.370	-1.030	
W/D/L CSPN	7/5/8		10/8/2		

(Q2) Conditional Density Estimation. We now focus on conditional density estimation. Due to space constraints, we present results on a subset of the standard binary benchmark datasets⁴, when different percentage of evidence (|X|) is available. We compare to DACL [Rooshenas and Lowd, 2016] as it currently provides state-of-the-art conditional log-likelihoods (CLLs) on such data. To this end, we first perform structure learning on the train data split (stopping learning when no more than 10% of samples are available), followed by end-to-end learning on the train and validation data. Note that the sophisticated structure learning in DACL directly optimizes for the CLL at each iteration.

Tab. 1 reports statistically significant results (best in bold), after a paired t-tests (p < 0.05) has been run. We can see how on the 80% evidence scenario CSPNs are comparable with DACL on most benchmarks. On the other hand, in case only 50% of $\bf X$ is observable, DACL tends to perform better than CSPNs, even though by a slight margin in general. We note that CSPNs are faster to learn than DACL and that, in practice, no real hyperparameter tuning was necessary to achieve these scores, while DACL ones are the result of a fine grained grid search (see [Rooshenas and Lowd, 2016]. This answers ($\bf Q2$) affirmatively and shows that CSPNs are comparable to state-of-the-art.

(Q3) Auto-Regressive Image Generation. We investigate ABCSPNs on a subset (20000 random samples) of grayscale MNIST and Olivetti faces by splitting each image into 16 resp. 64 blocks of equal size where we normalized the greyscale value for MNIST. Then we trained a CSPN on Gaussian domain for each block conditioned on all the blocks above and to the left of it and on the image class and formulate the distribution of the images as the product of all the CSPNs. We compare with the state-of-the-art PixelCNN++ model [Salimans *et al.*, 2017]. Training PixelCNN++ on a machine with 4 NVIDIA GeForce GTX 1080 GPUs took approximately a week to converge, while ABCSPNs employ one order of magnitude less parameters and converge in hours. Additionally, PixelCNN++ generates images pixel by pixel in sequence, whereas ABCSPNs yields a block at a time. That is, our structure speeds up also the generative process.

As can be seen Figs. 4 and 1, samples from ABCSPNs look as plausible as PixelCNN ones. Furthermore, ABCSPNs achieves this while reducing the number of independency tests among pixels required by CSPNs: from quadratic over all pixels in an image down to quadratic in the block size.

⁴We adopted the data splits of Rooshenas and Lowd (2016).



Figure 4: Samples generated by an ABCSPN (top), and PixelCNN++ (bottom) trained on MNIST.



Figure 5: Conditional image generation with ABCSPNs: bottom row images are sampled while conditioning on the two classes to which individuals from the two upper rows belong.

In Fig. 5, new faces are sampled from an ABCSPN after conditioning on a set of class images that is the mixing of two original classes in the Olivetti dataset. That is, by conditioning on multiple classes it generates samples that resemble both individuals belonging to those classes, even though the ABCSPN never saw that class combination before during training. This demonstrates how ABCSPNs are able to learn meaningful and accurate models over the image manifold, providing an affirmative answer to (Q3).

(Q4) Neural CSPNs with Random Structures. In high-dimensional domains, such as images, the structure learning procedure introduced above may be intractable. In these cases, CSPNs may still be applied by starting from a random SPN structure as proposed by Peharz et al. 2019, resulting in a flexible distribution $P(\mathbf{Y}; \theta = f(\mathbf{X}))$. When f is represented by a deep neural network, we obtain a highly expressive conditional density estimator which can be trained end-to-end.

To demonstrate the efficacy of this approach, we evaluate it on several multilabel image classification tasks. The goal of each task is to predict the joint conditional distribution of binary labels Y given an image X. Experiments were conducted on the CelebA dataset, which features images of faces annotated with 40 binary attributes. In addition, we constructed multilabel versions of the MNIST and Fashion-MNIST datasets, by adding additional labels indicating symmetry, size, etc. to the existing class labels, yielding 16 binary labels total.

We compare our model to two different common ways of parameterizing conditional distributions using neural networks. The first is the mean field approximation, whereby the output of a neural network is interpreted as logits of independent univariate Bernoulli distributions, assuming that the labels Y are conditionally independent given X. Second, we compare to mixture density networks with 10 mixture components, each itself a mean field distribution. For each of these models, including the CSPN, we use the same standard convolutional neural network architecture up to the last two layers. Those final two layers are customized to the different desired output formats: For the mean field and MDN models, all parameters are predicted using two dense layers. For the CSPN, we instead use a dense layer followed by a 1d-convolution, in order to obtain the increased number of SPN parameters without using drastically more neural network weights. The resulting conditional log-likelihoods as well as accuracies are given in Table 2. To compute accuracies, we obtained MPE estimates from the models using the standard max-product approximation. On the MNIST and Fashion dataset, estimates were counted as accurate only if all 16 labels were correct, on the CelebA dataset, we report the average accuracy across all 40 labels. The results indicate that the commonly used mean field approximation is inappropriate on the considered datasets, as allowing the inclusion of conditional dependencies resulted in a pronounced increase in both likelihood and accuracy. In addition, the improved model capacity of the CSPN compared to the MDN yielded a further performance increase. On CelebA, our CSPN outperforms a number of sophisticated neural network architectures from the literature, despite being based on a standard convnet with only about 400k parameters [Ehrlich et al., 2016].

Table 2: Average test conditional log-likelihood (CLL) and test accuracy of the mean field (MF) model, mixture density network (MDN), and neural conditional SPN (CSPN) on multilabel image classification tasks. Predictions on MNIST and Fashion are counted as accurate only if all 16 labels are correct. For CelebA, we report the average accuracy across all labels. The best results are marked in bold. As one can see, the additional representational power of CSPNs yields notable improvements.

	CLL			ACCURACY		
	MF	MDN	CSPN	MF	MDN	CSPN
MNIST FASHION	0., 0	-0.61 -0.73	٠.٠٠	,,	76.4% 73.7%	. 00 . 70
CELEBA	0.,,	-0.73	0	, , .	85.3%	

8 Conclusions

We have extended the concept of sum-product networks (SPNs) towards conditional distributions by introducing conditional SPNs (CSPNs). Conceptually, they combine simpler models in a hierarchical fashion in order to create a deep representation that can model multivariate and mixed conditional distributions while maintaining tractability. They can be used to impose structure on deep probabilistic models and, in turn, significantly boost their power as demonstrated by our experimental results.

Much remains to be explored, including other learning methods for CSPNs, design principles for CSPN+SPN architectures, combining the (C)SPN stack with the deep neural learning stack, more work on extensions to sequential and autoregressive domains, and further applications.

9 Acknowledgements

We acknowledge the support of the German Science Foundation (DFG) project "Argumentative Machine Learning" (CAML, KE 1686/3-1) of the SPP 1999 "Robust Argumentation Machines" (RATIO). Kristian Kersting also acknowledges the support of the Rhine-Main Universities Network for "Deep Continuous-Discrete Machine Learning" (DeCoDeML). Thomas Liebig was supported by the German Science Foundation under project B4 'Analysis and Communication for Dynamic Traffic Prognosis' of the Collaborative Research Centre SFB 876.

References

Christopher M Bishop. Mixture density networks. Technical Report NCRG/4288, Aston University, Birmingham, UK, 1994.

- A. Choi and A. Darwiche. On the relative expressiveness of bayesian and neural networks. In *Proc. of PGM*, volume 72, pages 157–168. PMLR, 2018.
- A. Darwiche. A differential approach to inference in Bayesian networks. Journal of ACM, 2003.
- S. Dasgupta and Y. Freund. Random projection trees and low dimensional manifolds. In *Proc. of Symp. Theory of computing*, 2008.
- O. Delalleau and Y. Bengio. Shallow vs. deep sum-product networks. In *Proc. of NIPS*, pages 666–674, 2011.
- G. Doran, K. Muandet, K. Zhang, and B. Schölkopf. A permutation-based kernel conditional independence test. In *Proc. of UAI*, 2014.
- Max Ehrlich, Timothy J Shields, Timur Almaev, and Mohamed R Amer. Facial attributes classification using multi-task representation learning. In *Proc. of the CVPR Workshops*, pages 47–55, 2016.
- R. Gens and P. Domingos. Discriminative learning of sum-product networks. In Proc. of NIPS, pages 3248–3256, 2012.
- R. Gens and P. Domingos. Learning the Structure of Sum-Product Networks. In Proc. of ICML, 2013.
- I. J. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, A. Courville, and Y. Bengio. Generative adversarial nets. In *Proc.* of NIPS, 2014.

Peter J Green. Iteratively reweighted least squares for maximum likelihood estimation, and some robust and resistant alternatives. *JSTOR*, 1984.

- C. Ide, F. Hadiji, L. Habel, A. Molina, T. Zaksek, M. Schreckenberg, K. Kersting, and C. Wietfeld. Lte connectivity and vehicular traffic prediction based on machine learning approaches. In *VTC*. IEEE, 2015.
- M. Johnson, D. K. Duvenaud, A. Wiltschko, R. P. Adams, and S. R. Datta. Composing graphical models with neural networks for structured representations and fast inference. In *Proc. of NIPS*, pages 2946–2954, 2016.
- Michael I Jordan and Robert A Jacobs. Hierarchical mixtures of experts and the em algorithm. *Neural computation*, 6(2):181–214, 1994.
- D. P. Kingma and M. Welling. Auto-encoding variational Bayes. In *Proc. of ICLR*, 2014.
- D. Koller and N. Friedman. Probabilistic Graphical Models: Principles and Techniques. MIT Press, 2009.
- John D. Lafferty, Andrew McCallum, and Fernando C. N. Pereira. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proc. of ICML*, pages 282–289, 2001.
- Y. Liang and G. Van den Broeck. Learning logistic circuits. In *Proc. of AAAI*, 2019.
- Peter McCullagh. Generalized linear models. EJOR, 16(3), 1984.
- A. Molina, S. Natarajan, and K. Kersting. Poisson sum-product networks: A deep architecture for tractable multivariate poissons. In *Proc. of AAAI*, 2017.
- A. Molina, A. Vergari, N. Di Mauro, S. Natarajan, F. Esposito, and K. Kersting. Mixed sum-product networks: A deep architecture for hybrid domains. In *Proc. of AAAI*, 2018.
- Hien D. Nguyen, Luke R. Lloyd-Jones, and Geoffrey J. McLachlan. A universal approximation theorem for mixture-of-experts models. *Neural Comput.*, 28(12):2585–2593, December 2016.
- R. Peharz, S. Tschiatschek, F. Pernkopf, and P. Domingos. On theoretical properties of sum-product networks. In *Proc.* of AISTATS, pages 744–752, 2015.
- R. Peharz, R. Gens, F. Pernkopf, and P. Domingos. On the latent variable interpretation in sum-product networks. *IEEE TPAMI*, 39(10), 2017.
- R. Peharz, A. Vergari, K. Stelzner, A. Molina, X. Shao, M. Trapp, K. Kersting, and Z. Ghahramani. Random sum-product networks: A simple and effective approach to probabilistic deep learning. In *Proc. of UAI*, 2019.
- H. Poon and P. Domingos. Sum-Product Networks: a New Deep Architecture. Proc. of UAI, 2011.
- T. Rahman, S. Jin, and V. Gogate. Cutset bayesian networks: A new representation for learning rao-blackwellised graphical models. In *Proc. of IJCAI*, 2019.
- Rajesh Ranganath, Dustin Tran, and David Blei. Hierarchical variational models. In *Proc. of ICML*, pages 324–333, 2016.
- Carl Edward Rasmussen. Gaussian processes in machine learning. In *Summer School on Machine Learning*, pages 63–71. Springer, 2003.
- D. J. Rezende and S. Mohamed. Variational inference with normalizing flows. In *Proc. of ICML*, pages 1530–1538, 2015.
- A. Rooshenas and D. Lowd. Discriminative structure learning of arithmetic circuits. In *Proc. of AISTATS*, 2016.
- T. Salimans, A. Karpathy, X. Chen, D. Kingma, and Y. Bulatov. Pixelcnn++. In Proc. of ICLR, 2017.
- O. Sharir and A. Shashua. Sum-product-quotient networks. Proc. of AISTATS, 2017.
- N. Shazeer, A. Mirhoseini, K. Maziarz, A. Davis, Quoc Le, G. Hinton, and J. Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *Proc. of ICLR*, 2017.
- Y. Shen, A. Choi, and Darwiche A. Conditional psdds: Modeling and learning with modular knowledge. In *Proc. of AAAI*, 2018.
- Y. Shen, A. Goyanka, A. Darwiche, and A. Choi. Structured bayesian networks: From inference to learning with routes. *Proc. of AAAI*, 33(01):7957–7965, 2019.
- Eric V Strobl, Kun Zhang, and Shyam Visweswaran. Approximate kernel-based conditional independence tests for fast non-parametric causal discovery. *Journal of Causal Inference*, 7(1), 2019.
- M. Trapp, R. Peharz, C. Rasmussen, and F. Pernkopf. Learning deep mixtures of gaussian process experts using sum-product networks. *preprint arXiv:1809.04400*, 2018.
- A. van den Oord, N. Kalchbrenner, L. Espeholt, O. Vinyals, et al. Conditional image generation with pixelcnn decoders. In *Proc. of NIPS*, 2016.
- A. van den Oord, N. Kalchbrenner, and K. Kavukcuoglu. Pixel recurrent neural networks. In Proc. of ICML, 2016.

- A. Vergari, N. Di Mauro, and F. Esposito. Simplifying, regularizing and strengthening spn structure learning. In *Proc. of ECML/PKDD*, 2015.
- A. Vergari, R. Peharz, N. Di Mauro, A. Molina, K. Kersting, and F. Esposito. Sum-product autoencoding: Encoding and decoding representations using sum-product networks. In *Proc. of AAAI*, 2018.
- K. Zhang, J. Peters, D. Janzing, and B. Schölkopf. Kernel-based conditional independence test and application in causal discovery. In *Proc. of UAI*, 2011.