

Distilling Privileged Multimodal Information for Expression Recognition using Optimal Transport

Muhammad Haseeb Aslam¹, Muhammad Osama Zeeshan¹, Soufiane Belharbi¹, Marco Pedersoli¹, Alessandro Lameiras Koerich¹, Simon Bacon² and Eric Granger¹

¹ LIVIA, Dept. of Systems Engineering, ETS Montreal, Canada

² Dept. of Health, Kinesiology & Applied Physiology, Concordia University, Montreal, Canada

muhammad-haseeb.aslam.1@ens.etsmtl.ca

eric.granger@etsmtl.ca

Abstract—Deep learning models for multimodal expression recognition have reached remarkable performance in controlled laboratory environments because of their ability to learn complementary and redundant semantic information. However, these models struggle in the wild, mainly because of the unavailability and quality of modalities used for training. In practice, only a subset of the training-time modalities may be available at test time. Learning with privileged information enables models to exploit data from additional modalities that are only available during training. State-of-the-art knowledge distillation (KD) methods have been proposed to distill information from multiple teacher models (each trained on a modality) to a common student model. These privileged KD methods typically utilize point-to-point matching, yet have no explicit mechanism to capture the structural information in the teacher representation space formed by introducing the privileged modality. We argue that encoding this same structure in the student space may lead to enhanced student performance. This paper introduces a new structural KD mechanism based on optimal transport (OT), where entropy-regularized OT distills the structural dark knowledge. Our privileged KD with OT (PKDOT) method captures the local structures in the multimodal teacher representation by calculating a cosine similarity matrix and selecting the top-k anchors to allow for sparse OT solutions, resulting in a more stable distillation process. Experiments¹ were performed on two challenging problems – pain estimation on the Biovid dataset (ordinal classification) and arousal-valence prediction on the Affwild2 dataset (regression). Results show that our proposed method can outperform state-of-the-art privileged KD methods on these problems. The diversity among modalities and fusion architectures indicates that PKDOT is modality- and model-agnostic.

I. INTRODUCTION

Multimodal expression recognition (MER) aims to capture and mimic the human-like nature of emotions [1]. The complementarity and redundancy of the multiple modalities typically allow all these MER systems to outperform their unimodal counterparts [2], [3]. Using multiple modalities works well in a lab-controlled environment where all the modalities are available during testing and inference. However, some modalities are difficult or expensive to obtain in real-world deployment. Various strategies, like cross-attention [4] that weigh the modalities dynamically, have been proposed in the literature to mitigate these issues. However, even those methods are not effective where some modalities are entirely missing. Physiological data like electroencephalogram (EEG) [5] electrocardiogram (ECG) and

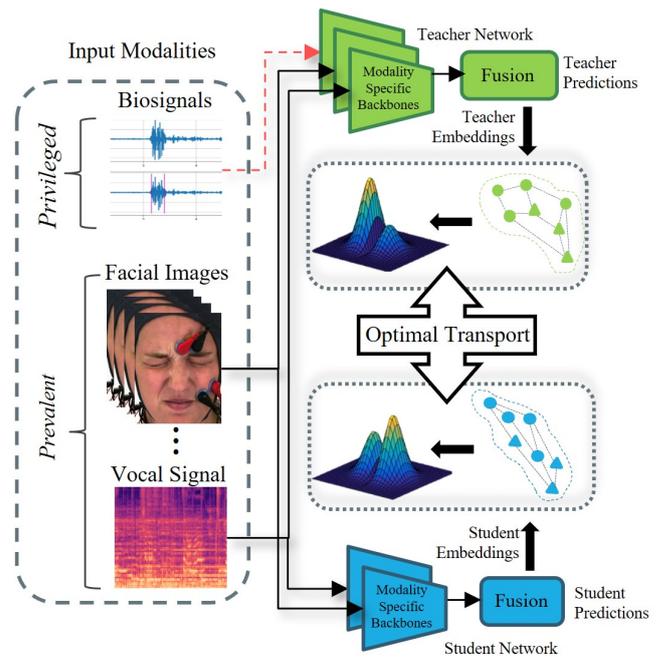


Fig. 1. Overview of the proposed Privileged Knowledge Distillation with Optimal Transport (PKDOT) method that captures the local structure in the multimodal teacher representation. Teacher backbones process multimodal input data that is privileged (red arrow) and prevalent (black arrows), while student backbones only process prevalent modalities

electromyography (EMG) [6] are widely studied in affective computing, and various MER systems have been proposed to recognize expressions. For instance, the physiological signals have been shown to outperform the visual modality, especially in tasks like pain estimation [7]. However, these signals are not always available in some practical contexts. Since they require specialized equipment and limit the mobility of the subjects, in such cases, most methods will typically rely on prevalent modalities (available at both design time and development) resulting in a less effective system. Using additional information (privileged modalities) only at the training time, may however, enhance system performance.

Recently, the learning using privileged information (LUPI) paradigm has been introduced for affective computing [8]. Privileged information in machine learning (ML) is the information available to the model only at training time but not at inference time [9]. LUPI methods have been shown to increase performance for systems using only the prevalent

¹Code: <https://github.com/haseebaslam95/PKDOT>

modalities (available during train and inference). Traditionally utilizing teacher-student networks, the teacher network is an MER model trained with all the modalities, and this model is then used to distill the knowledge to an unimodal model that only inputs the prevalent modality [8], [10]. One way to distill this information to the student is using the vanilla knowledge distillation (KD) method, which computes the Kullback–Leibler (KL) divergence between the softened logits in the teacher and student network. Other methods have proposed matching teacher and student representations in the feature space using Mean Squared Error (MSE) or cosine similarity. All of these methods use point-to-point matching to distill the knowledge, and are therefore, unable to capture the local structure formed in the teacher space. *Local structure* refers to a more fine-grained knowledge representation, where the distance of each sample from all the other samples in the training batch is calculated. We argue that this structural information, formed in the teacher space through the interaction between the prevalent and privileged modality data, should be captured to mimic the performance in the student space.

In this paper, a Privileged Knowledge Distillation with Optimal Transport (PKDOT) method is proposed that relies on a structural KD mechanism to effectively capture and distill the structural dark knowledge based on OT for the student (See Fig. 1). Privileged KD based on a similarity matrix computes the similarity over a training batch rather than flattening and computing a single cosine similarity score. The cosine similarity matrix retains information about the pairwise relationships between all batch samples. An encoder-decoder transformation network (T-Net) is trained during the teacher training stage, and is employed to hallucinate the privileged modality features. Entropy-regularized OT is then used to distill the structural dark knowledge.

The main contributions of this work are as follows. (1) A PKDOT method is introduced that computes a cosine batch similarity matrix to distill knowledge from teacher to student networks using entropy-regularized OT on selected anchor points to introduce sparsity. T-Net is also introduced that hallucinates the privileged modality at test time. (2) Extensive experiments were performed on two challenging MER problems – pain estimation on the Biovid dataset and arousal-valence prediction on the Affwild2 dataset. Results with different combinations of teacher and student modalities and fusion architectures indicate that the proposed PKDOT method allows for outperforming SOTA-privileged KD methods, and is modality- and model-agnostic.

II. RELATED WORK

A. Multimodal Expression Recognition (MER)

MER is the understanding and modeling of emotions through jointly learning from different signals, including facial cues, audio, and text. Ngiam et al. [11] proposed the seminal work in multimodal DL, where visual and audio modalities were encoded separately. Restricted Boltzmann Machines and autoencoders were then used to fuse this information. Tzirakis et al. [12] proposed an audio-visual

fusion model, where a 1D convolutional neural network (CNN) was used to extract features from the audio modality, and a ResNet-50 CNN was used for visual feature extraction. The two feature vectors were concatenated and fed into a recurrent network for simultaneous temporal modeling and fusion. Rajasekhar et al. [4] proposed a joint cross-attention mechanism for audio-visual fusion, where separated backbones were trained for audio and video modalities. The audio was transformed into spectrograms using the discrete Fourier transform (DFT) and fed to a ResNet-18 CNN, and an I3D CNN was used to extract features from the visual modality. Later, both the feature vectors were fed to a cross-attention module to calculate attention weights. The raw features were then multiplied with the attention weights to get attended features. This dynamically assigned weights to these modalities to overcome the noisy modality problem. The higher performance and robustness of the multimodal systems come at a cost, usually in terms of time and computational complexity. Recent efforts in minimizing the cost of multimodal systems have birthed concepts like attention bottleneck in transformers [13]. These methods still fall short in cases where some modalities are entirely missing.

Pain estimation is another major affective computing problem with many publicly available datasets, with the recent addition of pain estimation in infants [14] and animals [15]. Many physiological and image-based approaches for pain detection are proposed. Werner et al. [16] developed a pain-specific feature set called facial activity descriptors. Dragomir et al. [17] proposed a subject-independent deep learning approach with residual learning for pain estimation from facial images. Morabit et al. [18] proposed a data-efficient image transformer. Zhi et al. [19] proposed a sparse LSTM-based method to solve the vanishing gradient problem. Phan et al. [6] proposed an attention-based method to process the EDA and ECG signals for pain estimation in the physiological domain. Multi-level context information was extracted using LSTM and attention network and then fused at the decision level for final pain prediction. Lu et al. [20] proposed a transformer and squeeze and excitation-based network to process multiscale EDA signals. Specifically for pain estimation, the physiological signal-based approaches have been shown to outperform the facial image-based approaches. Zhu et al. [21], Kachele et al. [22], and Werner et al. [23] have proposed methods to combine visual and physiological modalities. The ultimate goal of this paper is to achieve performance that approaches multimodal systems using only the prevalent modality at test time.

B. Learning Using Privileged Information

Vapnik and Vashist [9] introduced the concept of learning using privileged information in ML. Additional information, only available at training time, was used to learn more discriminative information, outperforming the traditional ML paradigm of using the same information at training and testing. Many applications, like person re-identification [24] and action recognition [25], have since employed this con-

cept to enhance performance or increase robustness. Zhao et al. [26] proposed a privileged KD mechanism for online action detection. Future frames from the video were used as privileged information only at training time since the model can access future frames during training; however, only historical frames are available in the real world. To reduce the teacher-student gap, only partial hidden features of the student model were updated through KL-divergence loss. The availability and quality of the modalities are a concern in the multimodal ML paradigm. In the case of RGB-D data, depth sensing is available for the training data, but in the wild, only RGB is commonly available. Audio and visual modalities can be partially missing due to user-initiated muting, transmission/recording errors, occlusion, etc. Similarly, in the affective computing domain, some modalities, e.g., ECG, EMG, and EDA, may be completely absent at test time.

C. Knowledge Distillation and Optimal Transport

The seminal work in knowledge distillation was proposed by Hinton et al. [27] for model compression in a teacher-student learning paradigm. The accurate yet cumbersome teacher model is used as additional supervision to train a lightweight student model. The 'dark knowledge' comes from increasing the temperature in the teacher's softmax, making it less confident about one particular class. These softened logits encompass more information than one-hot encoding. Romero et al. [28] proposed hint learning, essentially distilling from the model's hidden layer instead of softened logits. Since then, several works for feature-based knowledge distillation have been proposed [29], [30]. Vanilla KD methods only consider individual samples and solely rely on matching the output activations between teacher and student. Park et al. [31] proposed RKD and argued that distilling the relational knowledge among samples can significantly improve the student's performance. Angle-wise and distance-wise loss were incorporated to penalize the structural differences between the teacher and student. Following that, this work also takes into account the local structures of the teacher model and effectively distills into the student model using OT.

OT is a well-established mathematical framework for calculating the optimal cost of transforming one probability distribution into another [32]. OT has been directly applied to ML problems where matching distributions are vital. Other solutions of distribution matching, like maximum mean discrepancy (MMD) and KL-divergence, suffer theoretical drawbacks [33]. MMD does not precisely capture the distance between distributions due to its sensitivity to sample size and outliers [34]. KL-divergence has been shown to fail in cases where two distributions do not overlap, resulting in infinity [35]. Although an expensive solution, OT provides a stable metric for matching distributions. To overcome the statistical and computational limitations of the OT, Cuturi et al. [36] proposed regularized OT. Many works have used OT of various applications, including model compression [35], domain adaptation [37], pedestrian detection [38], and neural

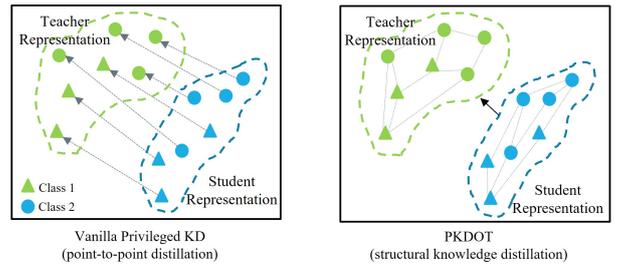


Fig. 2. (Left) Conventional privileged KD computes point-to-point distance without considering local structure. (Right) The proposed PKDOT method captures the local structure and matches teacher and student representations by distilling the structural dark knowledge (adapted from [31]).

architecture search [39]. To the best of our knowledge, this is the first use of OT for privileged KD in the context of expression recognition.

D. Privileged KD for Expression Recognition

Recently, expression recognition has seen a rise in privileged KD methods as the trend has shifted from more in-lab scenarios to more in-the-wild scenarios. These works mainly include using the privileged information as an additional modality to train a superior multimodal model, which is then used to distill to a student model that does not have access to the privileged modality. Aslam et al. [10] proposed a model agnostic method for distilling privileged information (PI). Cosine similarity-based loss was added to the task loss with adaptive weighting to mitigate the negative transfer. Makantasis et al. [8] proposed a similar valence and arousal prediction method using an MSE loss function and a categorical expression problem using a KL-divergence loss function. Liu et al. [40] also proposed a KD-based privileged DL mechanism in the physiological domain, where the teacher model was trained using the electroencephalogram (EEG) and galvanic skin response (GSR) signals. Later, this teacher model (EEG+GSR) was used to distill knowledge to the student model (GSR only) using KL-divergence. Although they enhance the student model performance, these methods cannot capture the structural knowledge in the multimodal teacher space. Capturing the local structures formed in the teacher network space by the introduction of privileged modalities should be distilled to the student network to enhance performance. Conventional KD methods rely on point-to-point matching. In this paper, we propose a structural KD mechanism using OT. Fig. 2 contrasts point-to-point vs. structural KD.

III. PROPOSED APPROACH

The Privileged Knowledge Distillation with Optimal Transport (PKDOT) method aims to enhance the performance of the student model by closing the gap between teacher and student representations. It relies on a cosine similarity matrix computed in the teacher and student space to capture the fine-grained structural information effectively. Entropy-regularized OT is then applied to minimize the distance between the teacher and the student. T-Net is also introduced to hallucinate the privileged modality features.

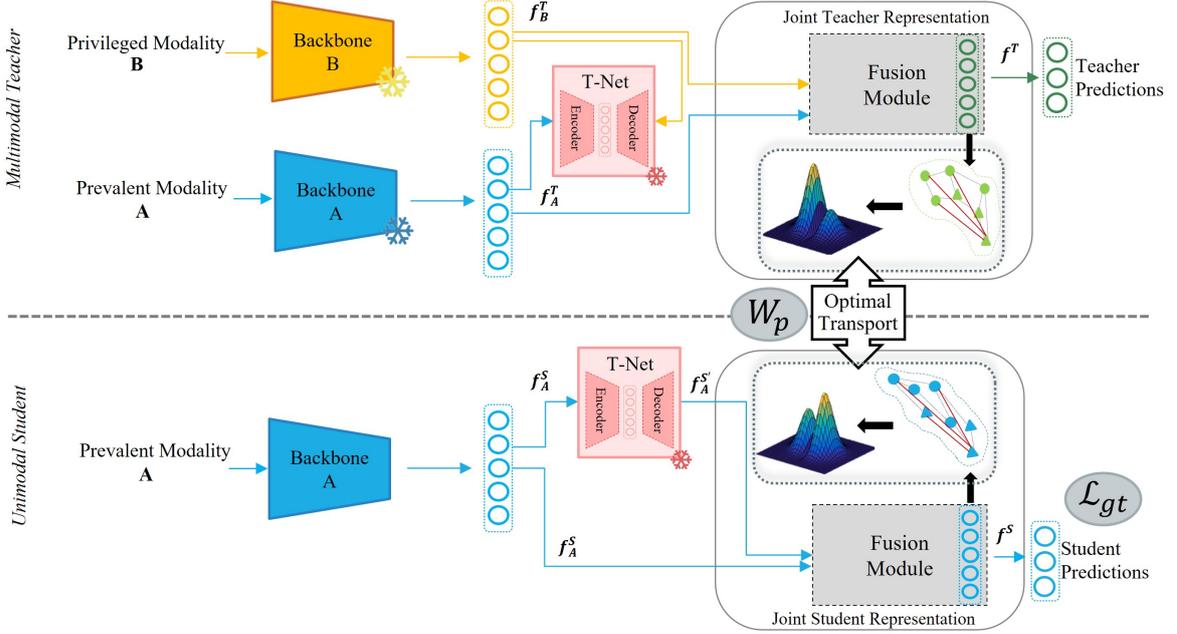


Fig. 3. Illustration of the proposed PKDOT method with prevalent and privileged modality backbones and fusion. The teacher network (top) is trained on both prevalent and privileged modalities, while the student network (bottom) only inputs the prevalent modality. It hallucinates the features of the privileged modality and generates student embeddings in the multimodal space. Entropy-regularized OT is used to distill the structural dark knowledge.

Further, we select anchors based on dissimilarity to aid the OT in becoming more stable and introduce sparsity. Selecting anchor points instead of distilling from all samples is motivated by the sparsity notion in OT, where fewer samples contribute substantially. In contrast, if all samples are included in the distillation process, the model can be penalized based on less relevant samples for the class boundaries. Fig. 3 shows the architecture of the PKDOT method. The rest of this section provides additional details on the structural similarity matching and optimal transport in the PKDOT method.

A. Structural Similarity Matching

Let Θ be a matrix of dimension $b \times m$ obtained from the teacher network, where b is the batch size and m is the dimension of the feature vector, and Θ^\top be its transpose of dimension $m \times b$, and Φ be a matrix of dimension $b \times m$ obtained from the student network, and Φ^\top be its transpose of dimension $m \times b$.

$$C_\Theta = \Theta \cdot \Theta^\top, \quad C_\Phi = \Phi \cdot \Phi^\top \quad (1)$$

where C_Θ (C_Φ) is a matrix of size $b \times b$ where each element C_{ij} represents the dot product of i^{th} row of Θ (Φ) and j^{th}

column of Θ^\top (Φ^\top) and can be denoted as:

$$C_{ij}^\Theta = \sum_k \Theta_{ik} \cdot \Theta_{kj}^\top, \quad C_{ij}^\Phi = \sum_k \Phi_{ik} \cdot \Phi_{kj}^\top \quad (2)$$

We normalize C_Θ and C_Φ to ensure that the similarity is not affected by the length. A normalization vector is calculated as follows:

$$N_\Theta = \sqrt{\sum_{k=1}^n (\Theta_{ik})^2}, \quad N_\Theta^\top = \sqrt{\sum_{k=1}^n (\Theta_{ik}^\top)^2} \quad (3)$$

where N_Θ (N_Φ) is the normalization vector of size $b \times 1$, calculated by taking the ℓ^2 -norm of each row. N_Θ (N_Φ) allows us to normalize the values so that the length of the vectors does not dominate the cosine similarity measure. N_Θ^\top (N_Φ^\top) is also calculated using Eq. (3), with the exception that it is of dimension $1 \times b$.

S_Θ and S_Φ are the final similarity matrices of teacher and student networks respectively and are obtained by element-wise division of C_Θ with the dot product of N_Θ and N_Θ^\top and C_Φ by the dot product of N_Φ and N_Φ^\top as follows:

$$S_\Theta = \frac{C_\Theta}{N_\Theta \cdot N_\Theta^\top}, \quad S_\Phi = \frac{C_\Phi}{N_\Phi \cdot N_\Phi^\top} \quad (4)$$

B. Optimal Transport

After the cosine similarity matrices have been computed for the given batch, the top- k most dissimilar samples are selected based on the cosine similarity, and a new similarity matrix of dimension $b \times k$ is obtained. The same indexes are also selected in the student similarity matrix. The *structural dark knowledge* is distilled from the teacher to the student using entropy-regularized OT, defined by:

$$W_p(\mu, \nu) = \int_{\chi \times \chi} \mathcal{O}(S_{\Theta_i}, S_{\Phi_i}) d\pi(S_{\Theta_i}, S_{\Phi_i}) + \epsilon H(\pi) \quad (5)$$

where S_{Θ_i} and S_{Φ_i} refer to each row in the teacher and student similarity matrices, respectively, semantically representing the local structures, and μ and ν are the marginal distributions. $\epsilon > 0$ is a coefficient and $H(\pi)$ is the entropic regularization defined as:

$$H(\pi) = \log \left(\frac{d\pi}{d\mu \cdot d\nu}(S_{\Phi_i}, S_{\Theta_i}) \right) \quad (6)$$

Overall, W_p represents an approximation of the Wasserstein distance between the teacher and student similarity matrices. This term is then included as an additional regularization to the task loss to align the intermediate representations.

The task loss, either concordance correlation coefficient (CCC) for regression (Eq. (7)) or classification (Eq. (8)) loss, is calculated with the ground truth (y) as follows:

$$\mathcal{L}_{gt} = 1 - \frac{2 \cdot \rho \cdot \sigma_x \cdot \sigma_y}{\sigma_x^2 + \sigma_y^2 + (\mu_x - \mu_y)^2} \quad (7)$$

$$\mathcal{L}_{gt} = - \sum_{c=1}^M y_{o,c} \log(p_{o,c}) \quad (8)$$

The student network is then trained using:

$$\mathcal{L}_{total} = \mathcal{L}_{gt} + \lambda \cdot W_p \quad (9)$$

where, L_{GT} is the task loss, W_p is the OT loss and λ is the coefficient to weigh the importance of the OT loss.

IV. EXPERIMENTAL METHODOLOGY

A. Datasets and Evaluation Protocol

1) Biovid Heat Pain Database is a popular database for pain estimation. The Part A of the dataset contains facial videos, ECG, EMG, and GSR. Part B of the dataset also contains facial EMG from the trapezius and corrugator muscles. The dataset is annotated for discrete labels for pain intensities, where BL refers to 'no pain' and PA1-PA4 refers to increasing pain intensities. The Biovid (A) dataset contains 8700 videos across 87 subjects, where each subject has 100 videos, corresponding to 20 videos per class. Some studies

report results on 67 subjects and drop 20 subjects who do not exhibit any response to the pain. We use the entire dataset and report our results on the 87 subjects. The Biovid (B) dataset is recorded in a similar setting to Part A, with the addition of facial EMG, and it has a total number of 86 subjects, corresponding to 8600 videos. The dataset has no predefined train test split, so most studies validate using cross-validation. Following that, we perform 5-fold cross-validation.

1) Affwild2 is one of the largest datasets of in-the-wild videos gathered from YouTube [41]. It contains 564 videos of varying length. The dataset has annotations for three affective computing problems: categorical expression recognition, action unit detection, and valence/arousal prediction. We validate the proposed method on the valence/arousal estimation problem. The dataset has training, validation, and test subsets with 351, 71, and 152 videos, respectively. This dataset is part of the ABAW challenge, so the test set annotations are not publicly available. Consequently, many studies report their results on the validation set.

B. Implementation Details

1) Biovid dataset: Teacher For the Biovid (B) dataset, the multimodal teacher model is a multimodal transformer-based fusion model (Fig. 4c) [42]. The physiological backbone is a ResNet-18 that takes spectrograms of size 67×127 obtained from EMG signals. The visual backbone is an R3D that takes cropped and aligned facial frames of size 112×112 as input. The batch size for the visual backbone is 64, with a learning rate of 10^{-3} optimized using the Adam optimizer. Both modalities output a feature vector of dimension 512. These feature vectors are fed to two separate transformer encoders and then to a multimodal transformer. K and V vectors are generated from one modality, and Q is generated from another. The output of the cross-attended vectors is gated using learnable weights. Finally, FC layers are added to generate the final prediction. The multimodal transformer is optimized with a learning rate of 10^{-4} and the Adam optimizer with a batch size of 64. For the Biovid (A), we evaluate the proposed method with feature concatenation (Fig. 4a), a relatively more straightforward fusion method. **Student:** The visual backbone and multimodal transformer model in the student network are the same as the teacher. The physiological backbone is dropped, and the T-Net is added to hallucinate the features of the privileged modality. The batch size for the student was set to 128, with a learning rate of 10^{-4} and Adam optimizer and the value for λ is 0.4.

2) Affwild2 dataset: Teacher: The joint cross-attention model (Fig. 4b) proposed by Rajasekhar et al. [43] is used. We use the cropped-aligned facial images that are provided with the dataset. A 3D CNN is used to extract features from

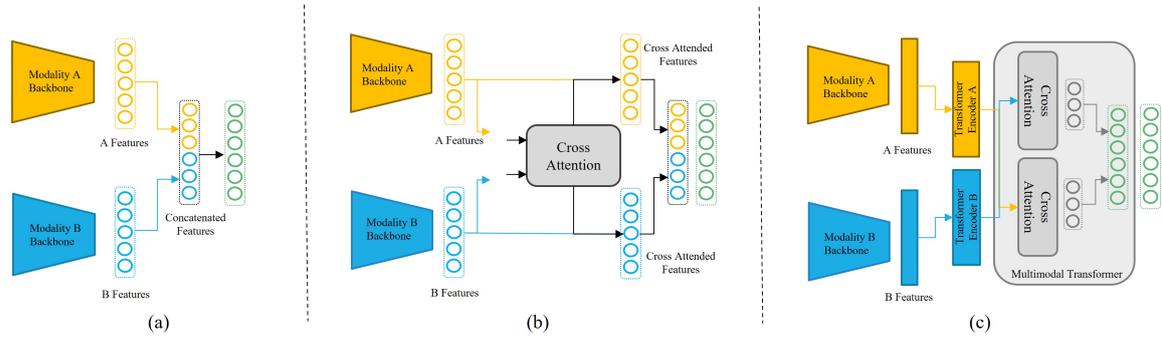


Fig. 4. Illustration of different fusion mechanisms employed to obtain the joint teacher representation: (a) feature concatenation, (b) joint cross attention [4], (c) multimodal transformer.

the visual modality. The batch size for the visual modality is 8, and the learning rate used is 10^{-3} . The audio modality is divided into multiple short segments corresponding to 256 frames in the visual modality. Spectrograms of resolution 64×107 are obtained using DFT. These spectrograms are fed to a ResNet-18 trained from scratch to extract the audio features. The batch size is the same as the visual modality with a learning rate of 10^{-3} . For the fusion of the two modalities, the concatenated vector of size 1024 is fed to the cross-attention module, which is optimized using the Adam optimizer with a learning rate of 10^{-3} and a batch size of 64. **Student:** The student network follows roughly the same implementation method as the teacher network, except there is no backbone to process the privileged modality. Instead, it is replaced with a T-Net, a simple encoder-decoder trained during the teacher training phase. In the student training phase, the T-Net is frozen and is used to hallucinate the features of the privileged modality. The batch size is set to 128 for the student model, and the value for λ is 0.4.

V. RESULTS AND DISCUSSION

A. Comparison with the State-of-the-Art

Table I provides an overview of the experimental settings, including different modalities, fusion methods, and the distillation setting. Table II compares the proposed method with SOTA-privileged distillation methods. We compare PKDOT with cosine similarity [10], MSE, and KL [8]. It can be observed from the table that PKDOT outperforms point-to-point distillation methods like KL-divergence, MSE, and cosine similarity. The improvement for the BioVid dataset is considerable, partly because the visual modality is weak in the pain estimation problem and because multiple subjects show little to no variation for pain and no-pain videos. Transporting the PI, i.e., EMG, from the multimodal network to the visual network greatly enhances the performance. The improvement in the Affwild2 dataset is marginal because

Dataset	Modalities	Property	Fusion	Distilled to
Affwild	Visual	-Strong -Prevalent	Joint Cross Attention	Visual (WES)
	Audio	-Weak -Privileged		
Biovid (A)	Visual	-Weak -Prevalent	Feature Concatenation	Visual (SEW)
	EDA	-Strong -Privileged		
Biovid (B)	Visual	-Strong -Prevalent	Multimodal Transformer	Visual (WES)
	EMG	-Weak -Privileged		

TABLE I

SUMMARY OF DIVERSE MODALITIES, THEIR PROPERTIES, FUSION MECHANISMS, AND DISTILLATION SETTINGS: STRONGER ENHANCING WEAKER (SEW) AND WEAKER ENHANCING STRONGER (WES).

the PI, i.e., audio modality, is weak on its own but can still improve the visual-only network. This also suggests that the proposed network can be used in stronger-enhancing-weaker (SEW) and weaker-enhancing-stronger (WES) scenarios.

Fig. 5 shows the evolution of the similarity matrix with training. Fig. 5a is the similarity matrix for the pretrained teacher. It can be seen from the image that the samples from the same class have high similarity, and the samples from the other class have high dissimilarity. Fig. 5b is the similarity matrix for the student before training, which shows a moderate similarity with other samples, and the diagonal represents the high similarity between the sample and itself. As the training progresses, we see the student similarity matrix become closer and closer to that of the teacher.

Table III compares the student model with visual-only SOTA on the Affwild2 dataset. The multimodal upper bound in the Affwild2 dataset for valence and arousal is 0.67 and 0.59, respectively. The visual-only network is the lower bound with 0.41 valence and 0.51 arousal value. The PKDOT

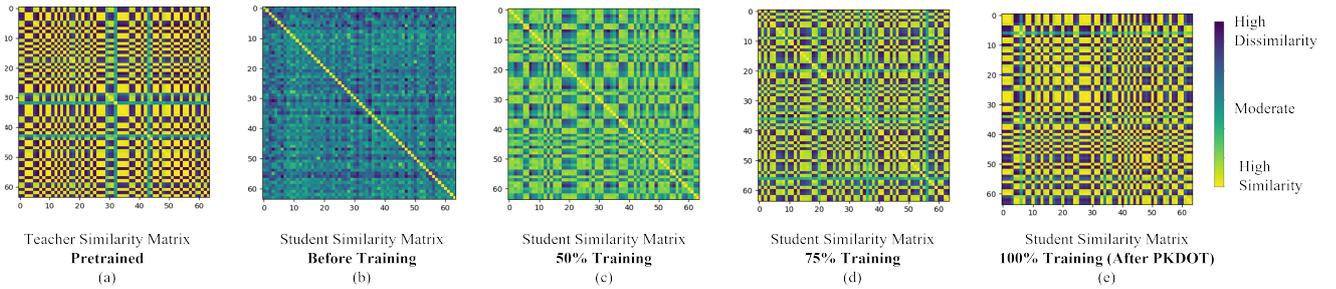


Fig. 5. Evolution of the similarity matrix over training epochs.

Method	Performance	Biovid (B) Affwild	
		Biovid (B)	Affwild
Aslam et al. [10]	Cosine Similarity (<i>IEEE CVPRw '23</i>)	75.40	V: 0.37 A: 0.53
Makantasis et al. [8]	MSE (<i>IEEE TAC '23</i>)	N/A	V: 0.39 A: 0.53
Makantasis et al. [8]	KL (<i>IEEE TAC '23</i>)	75.80	N/A
PKDOT (Ours)	Optimal Transport Structural KD	78.76	V: 0.43 A: 0.56

TABLE II
PERFORMANCE OF THE PROPOSED AND SOTA PRIVILEGED KD METHODS ON BIOVID AND AFFWILD2 DATASETS.

Method	Visual Network	Valence	Arousal
Baseline [44] <i>CVPRw'20</i>	ResNet-50	0.31	0.17
Zhang et al. [45] <i>CVPRw'20</i>	SENet-50	0.28	0.34
He et al. [46] <i>CVPRw'21</i>	MobileNet	0.28	0.44
Nguyen et al. [47] <i>CVPRw'22</i>	RegNet + GRU	0.43	0.57
Geesung et al. [48] <i>CVPRw'21</i>	ResNeXt + SENet	0.51	0.48
Visual only (Lower bound)	I3D	0.41	0.51
Student - PKDOT (Ours)		0.43	0.56
Multimodal (Visual + Audio) (Upper bound)		0.67	0.59

TABLE III
PERFORMANCE OF THE PROPOSED WITH SOTA VISUAL-ONLY METHODS ON THE AFFWILD2 VALIDATION SET.

student model shows an improvement of absolute 2% for the valence dimension and 3% for the arousal dimension. Table IV compares the PKDOT student model with visual-only methods on the Biovid (A) dataset. Some studies report results on no-pain (BL1) and pain (PA4), and some have included multi-class (MC), i.e., a 5-class problem. We present and compare both settings. It can be seen from the table that the proposed system gains an absolute 2.4% over the visual-only lower bound.

Table V compares the proposed method with methods in the literature for the Biovid (B) dataset. It can be observed

Method	Visual Network	Accuracy	
		BL1 vs. PA4	MC
Zhi et al. [19] <i>ITAIC'19</i>	Sparse LSTM	61.70	29.70
Morabit et al. [18] <i>ISIVC'22</i>	ViT	72.11	NR
Werner et al. [49] <i>ACIIW'17</i>	FAD + RF	72.40	30.80
Patania et al. [50] <i>SIGAPP'22</i>	GNN	73.20	NR
Gkikas et al. [51] <i>EMBC'23</i>	ViT	73.28	31.52
Dragomir et al. [52] <i>EHB'20</i>	ResNet-18	NR	36.60
Visual only (Lower bound)	R3D	72.10	30.38
Student - PKDOT (ours)		74.55	33.65
Multimodal (Visual + EDA) (Upper bound)		83.50	36.40

NR: Not Reported.

TABLE IV
PERFORMANCE OF THE PROPOSED AND SOTA VISUAL-ONLY METHODS ON THE BIOVID (A) DATASET.

Method	Visual Network	Accuracy
Kachele et al. [22] <i>IWMCS'15</i>	Handcrafted + RF	72.70
Visual Only (Lower bound)	R3D	74.10
Student - PKDOT (Ours)		78.76
Multimodal (Visual + EMG) (Upper bound)		81.30

TABLE V
PERFORMANCE OF THE PROPOSED AND SOTA VISUAL-ONLY METHODS ON THE BIOVID (B) DATASET.

from the table that the proposed PKDOT student model has gained an absolute 4.6% over the visual-only model.

Note that other methods in the literature may be tailored to the problem, with sophisticated architecture changes or extensive pretraining to achieve higher performance. This work aims not to push the SOTA on these problems but to exhibit that PKDOT can enhance performance by using simple models and only the visual modality at inference.

B. Ablations

1) *Batch Size and Anchor Selection*: Batch size is an essential parameter in the proposed mechanism since it dictates how many samples are included in the similarity matrix at each optimization step. We run PKDOT with batch sizes

from 32 to 256; for each experiment, we select 5, 15, and 30 anchors. Fig. 6 shows the evolution of results according to batch size and number of anchors. Our experiments show that increasing the batch size shows an improvement in the distillation efficiency. The best results are obtained with the batch size of 128 and 30 anchors.

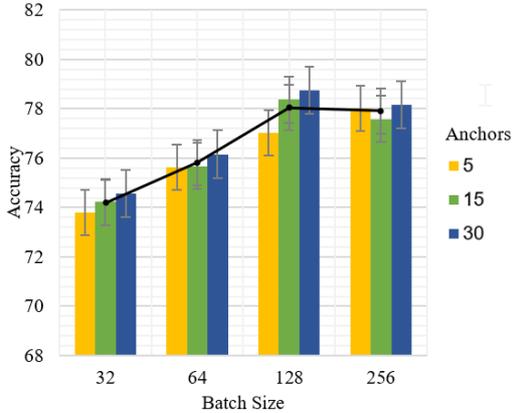


Fig. 6. Evolution of the performance of the proposed network with batch size and number of anchors variation on the Biovid (B) dataset.

2) *OT Regularization*: Entropy-regularized OT has a regularization coefficient that is the trade-off between minimizing transportation costs and maintaining uniformity.

We run experiments with different values of ϵ in Eq. 6.

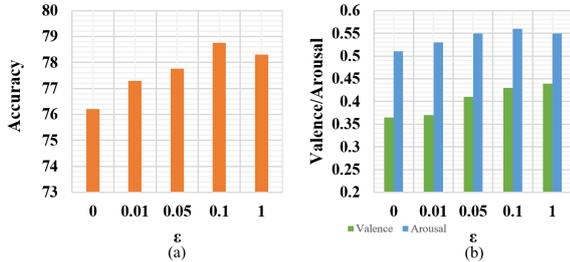


Fig. 7. The impact of the PKDOT regularization parameter ϵ on (a) accuracy for the Biovid dataset and (b) valence/arousal for the Affwild2 dataset.

Fig. 7 shows the impact of the regularization parameter on the PKDOT student performance. We run experiments with different values of ϵ . Larger values of ϵ emphasize the regularization term, i.e., it encourages the transport plan to be more sparse, where key samples contribute substantially. Values closer to zero put more emphasis on minimizing the transportation cost. In our experiments, $\epsilon=0.1$ gives the best trade-off between the transport cost and uniformity.

The proposed method is validated with different fusion architectures because the method used to obtain the multi-modal teacher representation also has a bearing on distillation

efficiency. We test with both, simple and complex fusion architectures. WES is when the privileged modality is weaker and the prevalent modality is stronger. SEW is when the stronger modality is the privileged one, and the student model only inputs the weaker modality. The experiments show that the proposed method works better in WES settings. However, there is more margin to enhance the performance when the prevalent modality is weaker since there is a significant performance gap between the student and teacher performance. It is still more burdensome for the student model to mimic the teacher because the stronger modality is unavailable to the student. In WES settings, the absent modality is weaker in comparison, and the student still has access to the stronger modality that the teacher model had used to learn the discriminative information.

VI. CONCLUSIONS

This paper presents a novel OT-based structural KD mechanism for transferring privileged information. Most privileged KD methods employ point-to-point matching, which cannot capture the local structures in the teacher space. The proposed PKDOT method solves this by capturing the local structures and applying entropy-regularized OT to translate the student representation closer to the teacher representation. To further support the OT solution for effective distillation, we select top-k anchors and only calculate the OT between them. The proposed PKDOT method is validated on two main MER problems: the pain classification and the valence/arousal estimation regression problem. To further prove the generalization capability of our proposed PKDOT method, we employ three different fusion methods and a variety of modalities to form the teacher representations, showing that the proposed method is model-agnostic and modality-agnostic. The proposed method can significantly improve student performance over the SOTA methods using privilege KD in both SEW and WES settings.

Limitations: The proposed method only allows for knowledge transfer after the modalities have been fused in the teacher network. Further, the model assumes that the top-k most dissimilar anchors are the most effective and contribute the most to the distillation process. Identifying the most effective anchor points through learning is a future research direction.

VII. ACKNOWLEDGMENTS

This work was supported in part by the Fonds de recherche du Québec – Santé (FRQS), the Natural Sciences and Engineering Research Council of Canada (NSERC), Canada Foundation for Innovation (CFI), and the Digital Research Alliance of Canada.

REFERENCES

- [1] Suwon Shon, Tae-Hyun Oh, and James R. Glass. Noise-tolerant audio-visual online person verification using an attention-based neural network fusion. *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 3995–3999, 2018.
- [2] Amir Zadeh, Minghai Chen, Soujanya Poria, E. Cambria, and Louis-Philippe Morency. Tensor fusion network for multimodal sentiment analysis. In *Conference on Empirical Methods in Natural Language Processing*, 2017.
- [3] R Gnana Praveen, Eric Granger, and Patrick Cardinal. Audio-visual fusion for emotion recognition in the valence-arousal space using joint cross-attention. *IEEE Transactions on Biometrics, Behavior, and Identity Science*, 5:360–373, 2022.
- [4] R Gnana Praveen, Wheidima Carneiro de Melo, Nasib Ullah, Haseeb Aslam, Osama Zeeshan, Théo Denorme, Marco Pedersoli, Alessandro L. Koerich, Simon Bacon, Patrick Cardinal, and Eric Granger. A joint cross-attention model for audio-visual fusion in dimensional emotion recognition. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2485–2494, 2022.
- [5] Muhammad Haseeb Aslam, Syed Muhammad Usman, Shehzad Khalid, Aamir Anwar, Roobaea Alroobaea, Saddam Hussain, Jaseem Almotiri, Syed Sajid Ullah, and Amanullah Yasin. Classification of eeg signals for prediction of epileptic seizures. *Applied Sciences*, 12(14), 2022.
- [6] Kim Ngan Phan, Ngumimi Karen Iyortsuun, Sudarshan Pant, Hyung-Jeong Yang, and Soo-Hyung Kim. Pain recognition with physiological signals using multi-level context information. *IEEE Access*, 11:20114–20127, 2023.
- [7] Patrick Thiam and Friedhelm Schwenker. Multi-modal data fusion for pain intensity assessment and classification. In *2017 Seventh International Conference on Image Processing Theory, Tools and Applications (IPTA)*, pages 1–6, 2017.
- [8] Konstantinos Makantasis, Kosmas Pinitas, Antonios Liapis, and Georgios N. Yannakakis. From the lab to the wild: Affect modeling via privileged information. *IEEE Transactions on Affective Computing*, pages 1–13, 2023.
- [9] Vladimir Vapnik and Akshay Vashist. A new learning paradigm: Learning using privileged information. *Neural Networks*, 22(5):544–557, 2009. *Advances in Neural Networks Research: IJCNN2009*.
- [10] Muhammad Haseeb Aslam, Muhammad Osama Zeeshan, Marco Pedersoli, Alessandro L. Koerich, Simon Bacon, and Eric Granger. Privileged knowledge distillation for dimensional emotion recognition in the wild. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 3338–3347, 2023.
- [11] Jiquan Ngiam, Aditya Khosla, Mingyu Kim, Juhan Nam, Honglak Lee, and Andrew Y. Ng. Multimodal deep learning. In *Proceedings of the 28th International Conference on International Conference on Machine Learning, ICML’11*, page 689–696, Madison, WI, USA, 2011. Omnipress.
- [12] Panagiotis Tzirakis, George Trigeorgis, Mihalis Nicolaou, Björn Schuller, and Stefanos Zafeiriou. End-to-end multimodal emotion recognition using deep neural networks. *IEEE Journal of Selected Topics in Signal Processing*, PP, 04 2017.
- [13] Arsha Nagrani, Shan Yang, Anurag Arnab, Aren Jansen, Cordelia Schmid, and Chen Sun. Attention bottlenecks for multimodal fusion. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan, editors, *Advances in Neural Information Processing Systems*, volume 34, pages 14200–14213, 2021.
- [14] Ghada Zamzmi, Rangachar Kasturi, Dmitry Goldgof, Ruicong Zhi, Terri Ashmeade, and Yu Sun. A review of automated pain assessment in infants: Features, classification tasks, and databases. *IEEE Reviews in Biomedical Engineering*, PP:1–1, 11 2017.
- [15] Marcelo Feighelstein. Explainable automated pain recognition in cats. In *Scientific reports*, June 2023.
- [16] Philipp Werner, Ayoub Al-Hamadi, Kerstin Limbrecht-Ecklundt, Steffen Walter, Sascha Gruss, and Harald C. Traue. Automatic pain assessment with facial activity descriptors. *IEEE Transactions on Affective Computing*, 8(3):286–299, 2017.
- [17] Marilena-Cătălina Dragomir, Corneliu Florea, and Valentin Pupezescu. Automatic subject independent pain intensity estimation using a deep learning approach. In *2020 International Conference on e-Health and Bioengineering (EHB)*, pages 1–4, 2020.
- [18] Safaa El Morabit and Atika Rivenq. Pain detection from facial expressions based on transformers and distillation. In *2022 11th International Symposium on Signal, Image, Video and Communications (ISIVC)*, pages 1–5, 2022.
- [19] Ruicong Zhi and Ming Wan. Dynamic facial expression feature learning based on sparse rnn. In *2019 IEEE 8th Joint International Information Technology and Artificial Intelligence Conference (ITAIC)*, pages 1373–1377, 2019.
- [20] Zhenyuan Lu, Burcu Ozek, and Sagar Kamarthi. Transformer encoder with multiscale deep learning for pain classification using physiological signals. *arXiv preprint arXiv:2303.06845*, 2023.
- [21] Ruicong Zhi, Caixia Zhou, Junwei Yu, Tingting Li, and Ghada Zamzmi. Multimodal-based stream integrated neural networks for pain assessment. *IEICE Trans. Inf. Syst.*, 104-D:2184–2194, 2021.
- [22] Markus Kächele, Philipp Werner, Ayoub Al-Hamadi, Günther Palm, Steffen Walter, and Friedhelm Schwenker. Bio-visual fusion for person-independent recognition of pain intensity. In *International Workshop on Multiple Classifier Systems*, 2015.
- [23] Philipp Werner, Ayoub Al-Hamadi, Robert Niese, Steffen Walter, Sascha Gruss, and Harald C. Traue. Automatic pain recognition from video and biomedical signals. In *2014 22nd International Conference on Pattern Recognition*, pages 4582–4587, 2014.
- [24] Zhiyuan Shi and Tae-Kyun Kim. Learning and refining of privileged information-based rnns for action recognition from depth sequences. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.
- [25] Xun Yang, Meng Wang, and Dacheng Tao. Person re-identification with metric learning using privileged information. *IEEE Transactions on Image Processing*, 27(2):791–805, 2018.
- [26] Peisen Zhao, Lingxi Xie, Jiajie Wang, Ya Zhang, and Qi Tian. Progressive privileged knowledge distillation for online action detection. *Pattern Recognition*, 129:108741, 09 2022.
- [27] Geoffrey E. Hinton, Oriol Vinyals, and Jeffrey Dean. Distilling the knowledge in a neural network. *ArXiv*, abs/1503.02531, 2015.
- [28] Adriana Romero, Nicolas Ballas, Samira Ebrahimi Kahou, Antoine Chassang, Carlo Gatta, and Yoshua Bengio. Fitnets: Hints for thin deep nets. *CoRR*, abs/1412.6550, 2014.
- [29] Jangho Kim, Seonguk Park, and Nojun Kwak. Paraphrasing complex network: Network compression via factor transfer. *ArXiv*, abs/1802.04977, 2018.
- [30] Byeongho Heo, Jeesoo Kim, Sangdoon Yun, Hoyjin Park, Nojun Kwak, and Jin Young Choi. A comprehensive overhaul of feature distillation. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 1921–1930, 2019.
- [31] Wonpyo Park, Dongju Kim, Yan Lu, and Minsu Cho. Relational knowledge distillation. *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3962–3971, 2019.
- [32] Cédric Villani. *Optimal transport: Old and new*. 2008.
- [33] Jean Feydy, Thibault Séjourné, François-Xavier Vialard, Shun-ichi Amari, Alain Trounev, and Gabriel Peyré. Interpolating between optimal transport and mmd using sinkhorn divergences. In Kamalika Chaudhuri and Masashi Sugiyama, editors, *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, volume 89 of *Proceedings of Machine Learning Research*, pages 2681–2690. PMLR, 16–18 Apr 2019.

- [34] Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *J. Mach. Learn. Res.*, 13(null):723–773, mar 2012.
- [35] Suhas Lohit and Michael Jones. Model compression using optimal transport. In *2022 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 3645–3654, 2022.
- [36] Marco Cuturi. Sinkhorn distances: Lightspeed computation of optimal transport. In *Neural Information Processing Systems*, 2013.
- [37] You-Wei Luo and Chuan-Xian Ren. Mot: Masked optimal transport for partial domain adaptation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3531–3540, June 2023.
- [38] Xiaolin Song, Binghui Chen, Pengyu Li, Jun-Yan He, Biao Wang, Yifeng Geng, Xuansong Xie, and Honggang Zhang. Optimal proposal learning for deployable end-to-end pedestrian detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3250–3260, June 2023.
- [39] Jiechao Yang, Yong Liu, and Hongteng Xu. Hotnas: Hierarchical optimal transport for neural architecture search. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11990–12000, June 2023.
- [40] Yucheng Liu, Ziyu Jia, and Haichao Wang. Emotionkd: A cross-modal knowledge distillation framework for emotion recognition based on physiological signals. In *Proceedings of the 31st ACM International Conference on Multimedia, MM '23*, page 6122–6131, New York, NY, USA, 2023. Association for Computing Machinery.
- [41] Dimitrios Kollias, Panagiotis Tzirakis, Mihalis A. Nicolaou, A. Papaoannou, Guoying Zhao, Björn Schuller, Irene Kotsia, and Stefanos Zafeiriou. Deep affect prediction in-the-wild: Aff-wild database and challenge, deep architectures, and beyond. *International Journal of Computer Vision*, 127:907–929, 2018.
- [42] Paul Waligora, Haseeb Aslam, Osama Zeeshan, Soufiane Belharbi, Alessandro Lameiras Koerich, Marco Pedersoli, Simon Bacon, and Eric Granger. Joint multimodal transformer for emotion recognition in the wild, 2024.
- [43] R Gnana Praveen, Patrick Cardinal, and Eric Granger. Audio-visual fusion for emotion recognition in the valence-arousal space using joint cross-attention. *IEEE Transactions on Biometrics, Behavior, and Identity Science*, pages 1–1, 2023.
- [44] D. Kollias. Abaw: Valence-arousal estimation, expression recognition, action unit detection and; multi-task learning challenges. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2327–2335, Los Alamitos, CA, USA, jun 2022. IEEE Computer Society.
- [45] Zihang Zhang and Jianping Gu. Facial affect recognition in the wild using multi-task learning convolutional network. *ArXiv*, abs/2002.00606, 2020.
- [46] Ruian He, Zhen Xing, Weimin Tan, and Bo Yan. Feature pyramid network for multi-task affective analysis. *ArXiv*, abs/2107.03670, 2021.
- [47] Hong-Hai Nguyen, Van-Thong Huynh, and Soo-Hyung Kim. An ensemble approach for facial behavior analysis in-the-wild video. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2511–2516, 2022.
- [48] Geesung Oh, Euseok Jeong, and Sejoon Lim. Causal affect prediction model using a past facial image sequence. In *2021 IEEE/CVF International Conference on Computer Vision Workshops (ICCVW)*, pages 3543–3549, 2021.
- [49] Philipp Werner, Ayoub Al-Hamadi, Kerstin Limbrecht-Ecklundt, Stefan Walter, Sascha Gruss, and Harald C. Traue. Automatic pain assessment with facial activity descriptors. *IEEE Transactions on Affective Computing*, 8(3):286–299, 2017.
- [50] Sabrina Patania, Giuseppe Boccignone, Sathya Buršić, Alessandro D’Amelio, and Raffaella Lanzarotti. Deep graph neural network for video-based facial pain expression assessment. In *Proceedings of the 37th ACM/SIGAPP Symposium on Applied Computing*, pages 585–591, 2022.
- [51] Stefanos Gkikas and Manolis Tsiknakis. A full transformer-based framework for automatic pain estimation using videos. volume 2023, 07 2023.
- [52] Marilena-Cătălina Dragomir, Corneliu Florea, and Valentin Pupezescu. Automatic subject independent pain intensity estimation using a deep learning approach. In *2020 International Conference on e-Health and Bioengineering (EHB)*, pages 1–4, 2020.