

# Meta-Object: Interactive and Multisensory Virtual Object Learned from the Real World for the Post-Metaverse

Dooyoung Kim, KAIST, Daejeon, 34141, South Korea

Taewook Ha, Jinseok Hong, Seonji Kim, KAIST, Daejeon, 34141, South Korea

Selin Choi, Heejeong Ko, KAIST, Daejeon, 34141, South Korea

Woontack Woo, KAIST, Daejeon, 34141, South Korea

*Abstract—With the proliferation of wearable Augmented Reality/Virtual Reality (AR/VR) devices, ubiquitous virtual experiences seamlessly integrate into daily life through metaverse platforms. To support immersive metaverse experiences akin to reality, we propose a next-generation virtual object, a meta-object, a property-embedded virtual object that contains interactive and multisensory characteristics learned from the real world. Current virtual objects differ significantly from real-world objects due to restricted sensory feedback based on limited physical properties. To leverage meta-objects in the metaverse, three key components are needed: meta-object modeling and property embedding, interaction-adaptive multisensory feedback, and an intelligence simulation-based post-metaverse platform. Utilizing meta-objects that enable both on-site and remote users to interact as if they were engaging with real objects could contribute to the advent of the post-metaverse era through wearable AR/VR devices.*

The widespread adoption of Augmented Reality/Virtual Reality (AR/VR) head-mounted displays (HMDs) has ushered in the era of ubiquitous virtual reality [1], blending the digital and physical realms to create new forms of interaction and communication<sup>1,2</sup>. At the heart of this evolution lies the concept of the metaverse, where virtual and real worlds interconnect to offer deeper and richer user experiences [2]. Within the metaverse, individuals can engage in interactions that transcend physical limitations, making the virtual living experience almost indistinguishable from reality. One of the essential components to achieve an immersive experience in the “post-metaverse”, a metaverse implemented through wearable AR/VR devices, is to make users feel as though they are interacting with real objects, even though they are engaging with virtual ones. Thus, there

is a growing need for next-generation virtual objects to support real-like interactions and multisensory feedback that reflect the real object.

Commercially available virtual objects currently have the limitation of being modeled as rigid body parts in 3D, allowing only for basic geometric manipulations such as movement, assembly, and size adjustments<sup>3</sup>. Even though the wearable AR/VR devices offer the advantage of being able to see and interact with 3D virtual objects, current stage of virtual objects could only provide restricted sensory feedback based on limited physical properties. Additionally, when interacting with such virtual objects, it is necessary to provide realistic multisensory feedback considering event timing and interaction position. However, existing vision-based tracking algorithms have difficulty in recognizing complex gestures or slight finger movements in real-time, and there’s a scarcity of research on provid-


XXXX-XXX © 2024 IEEE

Digital Object Identifier 10.1109/XXX.0000.0000000

<sup>1</sup><https://www.apple.com/apple-vision-pro/>

<sup>2</sup><https://www.meta.com/kr/en/quest/quest-3/>

<sup>3</sup><https://learn.microsoft.com/en-us/windows/mixed-reality/mrtk-unity/mrtk3-overview/>

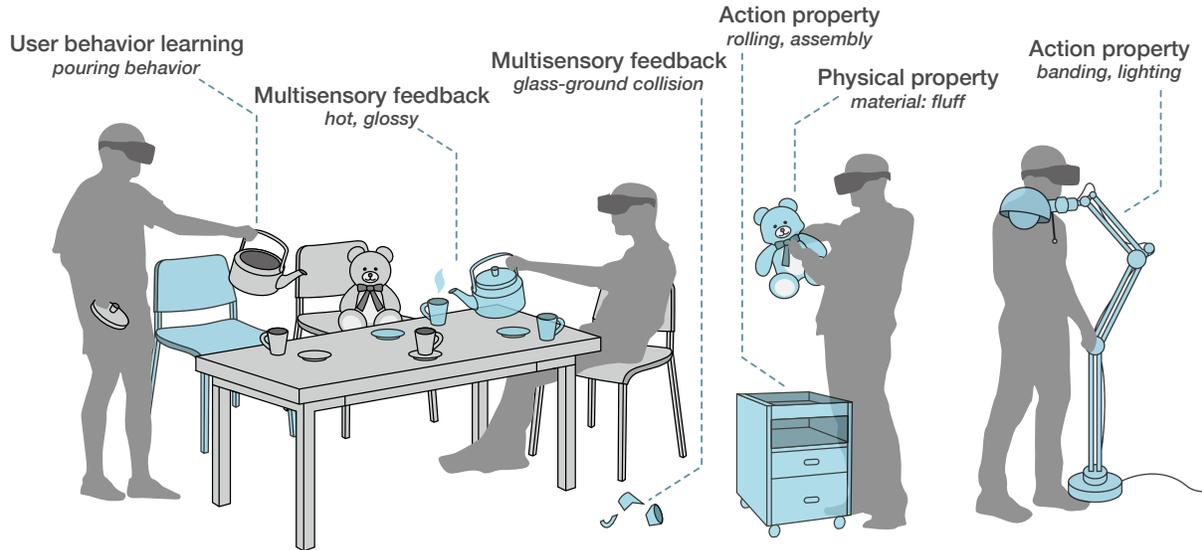

**FIGURE 1.** The concept of experiencing meta-object in post-metaverse. Images filled in gray represent physical objects and users, while those filled in blue represent meta-objects. Text in bold denotes components and properties of meta-objects, and text in italics highlights examples of each meta-object.

ing multisensory feedback tailored to users' cognitive traits [3]. Moreover, for virtual objects to interact realistically within the metaverse, the system for experiencing virtual objects should understand not only the entire environment but also the relationship between the virtual object and the environment. Such data that have to be handled in the system will be massive and need to be managed efficiently. To reflect the results of interactions between the environment and the virtual objects, the stored environmental data and the virtual objects should be intelligently simulated considering users' interaction and provide a realistic response to each user.

To solve the aforementioned problems and enable immersive interaction with virtual objects, we introduce a meta-object — a property-embedded virtual object that contains deformable and multisensory characteristics learned from the real world. **Figure 1** shows the concept of experiencing meta-object in post-metaverse. Meta-objects have three key components: 1) property-embedded meta-object generation, 2) interaction-adaptive multisensory feedback, and 3) intelligence simulation-based post-metaverse platform. First, by learning the behavior patterns of users interacting with real objects to create a draft of the meta-object, corresponding action and physical properties should be embedded through human-in-the-loop authoring tools to enable sustainable production of high-quality meta-objects. Second, as shown

in **Figure 1**, meta-objects should provide interaction-adaptive multisensory feedback to make users feel like they are interacting with real objects. The last one is an intelligent post-metaverse platform that utilizes scene graphs to synchronize interactions and reflect individual characteristics, allowing multiple users can collaboratively experience meta-objects.

Integrating meta-objects into the post-metaverse represents a significant advancement in virtual interaction, promising a deeply immersive experience that mirrors the complexity and richness of the real world. This approach not only overcomes the limitations of current virtual objects by providing a more nuanced and realistic interaction through multisensory feedback and property-rich simulations but also fosters collaborative experiences among users across different locations. The key contributions of this research lie in its potential to revolutionize the way users engage with ubiquitous virtual environments, enhancing educational, cultural, and industrial applications by making them more accessible and engaging. Integrating meta-objects into the metaverse could help counteract urban concentration and rural decline by transcending spatial and temporal boundaries, fostering connectivity, and creating equitable regional opportunities.

## BACKGROUND AND CURRENT STATE OF VIRTUAL OBJECT

### Modeling Virtual Objects

To experience various real-world objects in the metaverse as in everyday life, it is crucial that these virtual objects inherit real-world properties and are capable of diverse interactions. Research on virtual-object modeling has advanced through various deep learning techniques for generating 3D models including the use of generative adversarial neural networks (GANs) for 3D shape manipulation [4]. Recently, gaussian splatting [5] has been explored for rendering real-world objects as meshes. However, these methods have not yet succeeded in modeling objects in a way that inherently embeds diverse properties or enables interactive capabilities. Existing research has primarily focused on rendering and modeling to achieve high-quality visual representations of real objects [6], rather than enabling interactions that mimic those with real-world objects.

Real-world properties derived from human interaction patterns with real objects should be extracted, learned, and embedded during the creation and authoring of virtual objects. Current object modeling is conducted at a detailed level, allowing for disassembly and reassembly of components [7]. Beyond visuals, these models integrate properties such as the object's category, model, and required actions within 3D object datasets [8]. 3D models have primarily been used for simple labeling and elucidating object internals, but incorporating action properties that mirror real-world interactions is necessary for more realistic physical responses. Henlein et al. [9] indicates that learning interaction patterns centered around user behavior allows for the embedding of extracted action properties into virtual objects, enabling more realistic and intuitive interactions.

Likewise, for a realistic experience with virtual objects, both basic information and the learned physical and action properties should be considered together. However, due to the limitations in expert-based modeling of action properties during 3D modeling, only a limited number of users can participate in the creation of virtual objects and the assignment of properties. For virtual objects to be continuously used in the metaverse, it is necessary for users to participate in their creation. The system automates 3D modeling and basic property assignments from user behavior, while allowing the addition of diverse properties. This human-in-the-loop authoring method ensures interactions with virtual objects are both accurate and relevant. This approach leads to a comprehensive and context-aware configuration that is responsive to human behavior.

### Multisensory Feedback

In the metaverse, an object must provide a realistic experience by aligning with expected sensory responses and user behaviors during interactions. Sensory stimuli play a crucial role in enhancing the realism and effectiveness of virtual reality environments [10]. Research has shown that using multiple stimuli for feedback enhances task performance and increases immersion and presence in virtual environments [11]. There were studies on multisensory feedback about combining two types of feedback into a single feedback mechanism [12]. Further, results have shown that feedback of three stimuli—visual, auditory, and tactile—effectively enhances immersion and user experience more than two-sense feedback [13]. While previous studies have merely provided simultaneous individual sensory stimuli, it is necessary to holistically consider each sense when providing synesthetic feedback when users experience meta-objects.

For realistic interactions, it is crucial to precisely track the interaction areas with objects and provide adaptive feedback based on the object's various properties. Jot et al. [14] demonstrates the use of audio-visual feedback, which is played based on the position, timing, and intensity of collisions. While combining audio-visual feedback enhances user experience, this method only replicates feedback based on collision detection and does not intelligently reflect responses according to the event. Deng et al. [15] utilizes a particle system to efficiently detect collisions between the user's hand and contact surfaces, providing visual feedback that considers the material properties of the object to enable realistic physical simulations. However, as these researches only address single sensory and property inputs, a more complex, multisensory approach is necessary for a realistic interaction experience. Therefore, to enhance the interaction experience between virtual objects and users, multisensory feedback should adapt not just simple collisions but various interaction events should be provided.

### Virtual Objects for Metaverse

For diverse interactions with virtual objects through a personal wearable post-metaverse platform, it is essential to have properties for deeper manipulation, such as deformation and articulated manipulation. Additionally, comprehensive data on the relationships between the environment, objects, and users is crucial. Such complex and relational data has been managed through a hierarchical structure known as a scene graph [16]. Scene graphs have been used SLAM for 3D spatial perception and robotic manipulation [17],

allowing for efficient management of large volumes of data within the platform. Particularly in post-metaverse platforms experienced through HMDs, it is necessary to understand and configure scene graphs to integrate the properties of virtual objects, the surrounding environment, and personalized user feedback.

Within the metaverse platform experienced through personal wearable AR/VR devices, intelligent simulation based on scene graphs is needed to effectively represent and interact with virtual objects considering environment, users, and other objects. Intelligence simulation, which has been used in robotics to simulate environments similar to real life, should also consider user perspectives in the metaverse to provide personalized interaction experiences. Current research in intelligence simulation for hand-object interactions in the metaverse provides highly realistic and interactive simulation capabilities [18]. However, due to high computational complexity and the need to process large amounts of data, there are limitations in implementing low-latency interactions [19]. Currently, multi-user metaverse platforms, such as VRChat<sup>4</sup>, Microsoft Mesh<sup>5</sup>, Meta Horizon Workrooms<sup>6</sup>, focus on 3D avatar-mediated communication, lacking features that support intelligent simulations that allow users to interact with virtual objects as they would in the real world. Therefore, post-metaverse platforms need intelligence simulations that can provide immersive interactions and handle large volumes of data to allow simultaneous interactions by multiple users.

### META-OBJECT AND KEY COMPONENTS

A meta-object is a next-generation virtual object for an expanded virtual world that enables users to experience the metaverse within physical spaces through wearable AR/VR devices. Analyzing and expanding from the definition of metaverse-as-platform [2] and the Ubiquitous Virtual Reality [1], the post-metaverse can be defined as follows:


**Definition 1 (Post-Metaverse).** *The post-metaverse is a ‘reality-virtuality convergence economy platform’ that transcends the constraints of space and time to connect, communicate, and collaborate with people.*

To achieve this post-metaverse, it requires: 1) digital twins linked to reality and avatars representing users,

2) meta-objects created and utilized through generative AI, 3) a trustworthy NFT-based economic ecosystem sustained and expanded through interoperability, and 4) personal wearable AR/VR platforms enabling real-world utilization. This aligns with the goals pursued by Ubiquitous Virtual Reality as well [1].

To enable seamless and real-time spatial interactions in the post-metaverse, a virtual object should be generated through learning from various real-world information, such as user behavior of interaction with physical objects. This includes not only the visual appearance of actual objects but also their inherent physical properties—such as material composition, dynamics, electromagnetic, and thermal features—and their action properties—encompassing disassembly, construction, alteration, and demolition. Based on the concept of U-content [20], [21], [22], we conducted consecutive workshops to describe a meta-object for over four months. By doing so, we defined a meta-object as follows:

**Definition 2 (Meta-Object).** *A meta-object is a property-embedded virtual object that contains interactive and multisensory characteristics learned from the real world.*

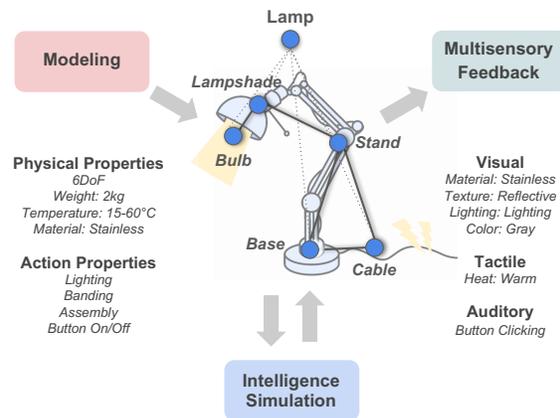

**FIGURE 2.** A meta-object (lamp) and the relationship between three key components for sustained utilization of meta-objects in the post-metaverse.

Figure 2 illustrates a meta-object created using a lamp as a medium, along with its three key components and their relationships with the meta-object. As shown in Figure 2, three key components, 1) modeling, 2) multisensory feedback, and 3) intelligence simulation, are needed for sustained utilization of meta-objects in the post-metaverse. Firstly, the meta-objects should be modeled by learning from user interactions

<sup>4</sup><https://hello.vrchat.com/>

<sup>5</sup><https://www.microsoft.com/en-us/mesh>

<sup>6</sup><https://forwork.meta.com/kr/horizon-workrooms/>

with real-world objects, supported by incentive-based authoring tools that allow all metaverse participants to produce high-quality meta-objects. Secondly, meta-objects must provide multisensory feedback through wearable haptic devices designed to respond in real-time to the user's rapid and detailed gestures. Lastly, it is crucial to recognize and simulate the interrelationships between the environment, meta-objects, and users using intelligent scene graphs, ensuring synchronization of remote and on-site multi-party interactions on a low-latency wearable AR/VR platform.

### Meta-Object Modeling and Property Embedding

To provide realistic experiences and enhanced interactions to users, the key virtue of meta-objects is to embody properties that reflect the characteristics of real-world counterparts. We investigated and classified techniques from the state of the art of modeling virtual objects from the real world. State-of-the-art techniques include realistic 3D reconstruction, joint rigging, and metadata embedment. This includes not only modeling the shape from real-world counterparts but also granting physical and action properties based on human behavior. With the classified techniques, we derive three distinct approaches for modeling meta-objects facilitated by embedding properties. Three approaches we derive in this article include comprehensive modeling, human behavior learning, context-aware modeling, and human-in-the-loop authoring.

Comprehensive modeling of meta-objects involves creating shape reconstructions through geometric scanning and modeling, followed by capturing the physical characteristics of real-world objects. This process ensures comprehensive representation that encompasses both the shape and inherent characteristics of real-world objects. In terms of modeling virtual objects, state-of-the-art generally notes visually precise reconstruction of real-world objects based on surface or geometric information [23]. Recent research focuses on view synthesis as a method for generating realistic virtual objects and scenes [5]. These techniques aim to recreate the appearance of objects in a manner that closely mirrors their real-world counterparts. However, in the metaverse environment, where not only visual but also tactile and auditory feedback is prevalent, such visually precise reconstruction can not enhance realism and interactivity. Therefore, comprehensive modeling incorporating physical properties such as materiality, dynamics, sonic, and thermal data is required to reproduce the characteristics.

To encode action properties in a meta-object, rel-

evant human behavior towards the object should be learned. Anticipating how users will interact with a target object and their expectations for the object's response is challenging to achieve manually. Therefore, it is essential to interpret action properties that can be attributed to objects by extensively learning the behavioral patterns of users towards objects. Through this human behavior learning, a meta-object can be correctly endowed with action properties that allow it to respond appropriately to user interactions. This approach ensures a more interactive model. Furthermore, learning user behaviors facilitates meta-objects to intelligently discern user behavior patterns, thereby extending the range of possible interactions with users. To represent both reversible and irreversible action properties in accordance with user interactions, it should be known how the object is deformed by the interaction. By human behavior learning, encoded physical and action properties of meta-objects are decoded and represented in accordance with user interaction inputs.

Both machine and deep learning-based techniques have been introduced that predict and classify user interactions and derive corresponding actions for various goals [24]. Similarly, to ensure that meta-objects with action properties can produce the appropriate actions at the right user behavior, learning-based models should be facilitated to classify and predict user intentions and interactions. These learning-based models can be trained by setting distinct categories and parameters of user behaviors.

Context-aware modeling of meta-objects refers to the process of capturing both the geometric and spatial relationships within objects. This approach ensures a thorough understanding of how objects are composed, enhancing the accuracy and relevance of the models. Intra-object scene graphs can be utilized to represent joints and relationships among segments within an object. Scene graphs are commonly used to represent relationships between objects and the spaces they inhabit [25]. By adopting this approach, intra-object scene graphs can represent relationships between segments within an object. Constructing such intra-object scene graphs necessitates context-aware modeling, which involves modeling objects at the segment level, subdividing meshes, and rigging, as well as labeling relationship information between segments. Utilizing such a structure allows efficient manipulation of the meta-objects state in response to various inputs, including text commands and external networks.

Human-in-the-loop authoring involves collaboration of various individuals in the co-creation process, which includes creating, modifying, and managing the data of

meta-objects. In the process of modeling meta-objects, there may be missing pieces of information that modeling experts might overlook. Additionally, there can be information that can be discerned and captured only by humans, not by modeling techniques and algorithms. Furthermore, meta-objects can be situated in multifaceted scenarios—such as artwork, machinery, and complex systems—which contain not only physical and action properties but also semantic and narrative properties. In this case, metadata that supplements the explanation of the meta-objects is required, in addition to the aforementioned properties. Therefore, beyond formulating the geometric, physical, and behavioral information of meta-objects, it becomes vital for various users to label and add additional properties in the generation process. To this end, human-in-the-loop authoring that allows anyone to participate plays a significant role in generating meta-objects.

However, one fundamental problem with metaverse platforms is the lack of elements or methods to motivate users during the content creation or production process [2]. Researchers explored mechanisms providing incentives to users during the creation of virtual objects and assigning value to these objects through NFTs [26]. Similarly, it is necessary for meta-objects to be reproduced and utilized sustainably, ensuring that they retain intrinsic value and encourage user participation. To continuously engage users in creating and interacting with meta-objects, improvements in user experience in transactions or proposing novel systems are necessary. To preserve the unique value of meta-objects, techniques like GAN-based counterfeit and copyright detection models can be employed to ensure authenticity. Conclusively, through blockchain-based registration, tracking, and management, meta-objects can become sustainable by protecting the copyright of original creators while also providing them with incentives as their creations are reproduced by others.

### Interaction-Adaptive Multisensory Feedback

In the metaverse, the concept of virtual-real convergence is vital for creating an engaging and continuously used platform. The term ‘virtual-real convergence’ refers to the extent to which the virtual world is converged with the real world through AR/VR technologies [2]. This requires virtual objects to provide realistic multisensory feedback adapting user behavior. To deliver such multisensory feedback, accurate motion and intent recognition must be ensured. For this, accurate geometric tracking of the hands and the body is essential. Research in hand and body track-

ing, particularly within the realm of computer vision, has yielded promising results [27]. However, existing vision-based methods are vulnerable to fast or subtle movements of the user, while they should be tracked to provide precise and realistic multisensory feedback. These weaknesses can be overcome by multimodal systems using additional sensors. Based on the results obtained with multi-modal tracking techniques, meta-objects can offer comprehensive multisensory feedback, including visual, auditory, and tactile.

Users first encounter virtual objects through vision. Thus, providing a visually realistic model would enhance immersion. However, the model’s realism depends not only on how well it has been modeled but also on the adaptive rendering of lighting and shadows [28]. If it fails to respond to the ambient lighting of the environment, users may find it difficult to perceive the model as part of the same space. Therefore, the meta-object adaptively reflects the lighting conditions of the surrounding environment, with its shadow representation also following the physical changes of the object itself. Additionally, meta-object visually reflects user interactions immediately. When a user manipulates an object, the object must stay aligned with the user’s hand movements and also provide appropriate visual feedback for more complex and detailed interactions, such as deformation, by applying force. Furthermore, through detailed tracking of the user’s subtle movements, it enables a detailed human-object spatial representation that precisely depicts the contact surfaces between the user and the object.

Auditory feedback is a critical sensory component that enhances the realism of objects in the metaverse. For optimal effect, the feedback must vary according to the inherent properties of each meta-object, such as material and texture. This could be achieved through a comprehensive library of sound effects for different materials or via a generative model that synthesizes sound effects to match the specific situation and properties of the objects.

Furthermore, auditory feedback of meta-objects requires accurate event detection and sophisticated spatial audio. Providing auditory feedback with precise timing is essential for immersing users in their interactions with meta-objects. To ensure this, accurate motion detection is necessary to accurately detect when and where the user interacts with the object. This should capture even subtle movements to accurately reflect the user’s intentions. It should also take into account the spatial relationship, as well as direct interaction detection, to provide realistic auditory feedback. To make users perceive that meta-objects exist within their physical environment, sophisticated spatial


audio feedback is essential. This can be achieved by delivering binaural sound based on the precise location and head pose of the user, enabling them to discern subtle differences in interaction points. Additionally, the spatial audio should adapt to environmental contexts; for instance, the sound of a can rolling at a user's feet should sound distinct from one rolling under a table, further enhancing the realism and depth of the virtual experience.

Tactile feedback is essential for providing a high sense of realism during user interaction with objects by offering direct and intuitive feedback. Meta-objects can deliver tactile feedback, including texture, force, and thermal information, to enhance the user's immersion. With tactile feedback, users can intuitively understand an object's characteristics, and providing thermal information allows users to notice changes in the object's properties swiftly.

Tactile feedback is feasible with wearable devices such as haptic gloves. These gloves can provide feedback with transducers like motors and actuators that generate movement and sensors that detect user interaction and control tactile feedback. However, using wearable devices incorporates numerous machine parts to provide tactile feedback, while effective, presents clear trade-offs regarding vision tracking, usability, and cost. To overcome these trade-offs, lightweight wearable devices should be implemented. To provide various types of tactile feedback with limited transducers in lightweight wearable devices, phantom sensations can be employed. By strategically placing a limited number of motors on devices and finely tuning the activating sequences, the system could provide tactile feedback to the desired position. Additionally, using vision tracking as an auxiliary tool can cover tactile sensors, maintaining tracking performance and usability while still providing realistic tactile feedback.

Ultimately, users can receive multisensory feedback from meta-objects that includes visual, auditory, and tactile feedback through accurate tracking and context understanding. However, such technology typically requires high computational power and energy. Since meta-objects need to be supported on personal devices, it is essential to deliver this feedback cost-effectively. To this end, the various sensory feedback described should be integrated in a way that enhances the overall sense of realism for the user. Employing such cross-sensory feedback allows for individual sensory limitations to be offset by complementing them with other senses, thus providing a comprehensively heightened sense of realism. This integrated approach ensures that the system remains feasible for everyday use on personal devices.

## Intelligence Simulation-based Post-Metaverse Platform

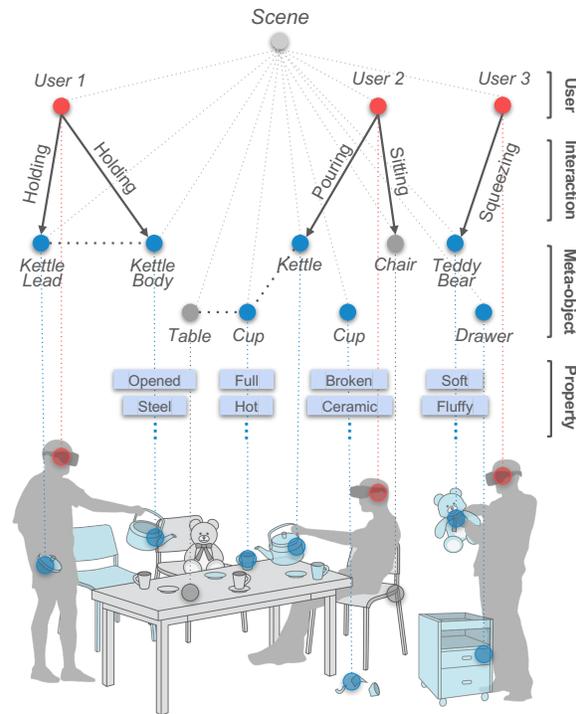

**FIGURE 3.** Scene graphs of a scene with users, interactions, meta-objects, and properties for the intelligence simulation. Blue nodes refer to the meta-objects, and their embedded physical and action properties were written.

Since the orientation of the meta-object matches the real object, it could be implemented considering embedded properties, environment components, and user data. Intelligence simulation is required for not only processing those large amounts of data but also for personalized feedback, and synchronization of simultaneous multi-user interaction for implementing realistic meta-objects. With properties encoded in meta-object modeling through user behavior learning and human-in-the-loop authoring, they entail a substantial volume of data to consider. Additionally, the numerous interactions and relationships occurring among them exacerbate the increase in data volume. Intelligence simulation can for the complex processing of large amounts of data by effectively managing numerous element and relationship data and deriving interaction results. The simulation results of diverse interactions expressed as meta-objects are delivered as multi-sensory feedback to provide users with a sense of realism.

Intelligence simulation can manage and simulate

the interaction result of meta-objects using comprehensive data represented by scene graphs. Scene graphs effectively represent relationships between objects, environments, and user data, or relationships within a single meta-object [16], [17]. Figure 3 shows an example of scene graphs with structured data of meta-objects and users using horizontal and hierarchical relationships based on the properties of each component. Each object in the scene has various physical and action properties, which are reflected when represented as individual nodes, as marked with blue and dark gray in Figure 3. In the scene graph, individual users are also represented as nodes and are marked with red in Figure 3. When an individual user interacts with an object, the multisensory feedback that occurs as a result of the object's interaction is simulated. In addition, like objects in reality, various properties that meta-objects have on their own or that arise when interacting with external factors such as the environment or users also can be considered as scene graphs.

Given the same intensity, type, and configuration of multisensory feedback from interactions with meta-objects, the sense of realism varies for each user due to differences in their feedback acceptance systems. As individuals perceive realism differently based on their interactions with meta-objects, personalized feedback through learning-based techniques should also be integrated into intelligence simulations. These simulations can adjust multisensory feedback by analyzing object properties and learning from both the user's explicit and implicit reactions. Furthermore, adaptively initiated feedback can be provided even to novice users lacking accumulated personal data when the intelligence system considers user characteristics.

Finally, like real-world interactions between two or more people, meta-object interaction must be utilized in collaborative situations where multiple users interact simultaneously, thus requiring synchronization in intelligence simulation. Managing data in remote collaboration is the fundamental goal of networking systems. However, the complexity and diversity escalate in remote collaborations involving meta-objects in post-metaverse platform. Since the multi-user interactions may not be independent of each other, intelligence simulation is required to manage simultaneous interactions and their outcomes, taking into account the timing and the target user. Moreover, in the case of meta-objects with properties, complex interactions can occur both sequentially and concurrently, highlighting the crucial role of intelligence simulation as a version control tool to manage the factors influencing it. Particularly in large-scale collaborative situations involving

numerous users, preventing conflicts and oversights in interactions and their outcomes is vital, underscoring the necessity for intelligence simulation.


## DISCUSSION

### Deliverables

The introduction of meta-objects into the post-metaverse marks a transformative leap in virtual interactions, bringing an unparalleled depth to user experiences. Figure 4 shows the system diagram for experiencing meta-object in post-metaverse. The system comprises one offline module dedicated to the property-embedded meta-object generation and two online modules: one for tracking and multisensory feedback on a wearable AR/VR device and the other for a learning-based event tracking and intelligence simulation. The offline meta-object generation module in Figure 4 automatically creates an initial version of the meta-object through comprehensive modeling and context-aware modeling to produce 3D models, coupled with property databases generated via user behavior learning. Subsequently, a user-participation incentive system offers rewards in the form of NFTs, and the meta-data created during this process is assigned to the preliminary meta-object, resulting in the final creation of the meta-object.

Figure 4's online (wearable AR/VR device) module operating in wearable AR/VR devices processes acquired data and distinguishes data to be processed on-device and data to be offloaded. Tracked pose and subtle interaction from the multimodal tracking module could provide interaction-adaptive multisensory feedback by combining visual, auditory, and tactile feedback with transducers in wearable devices. The online (server) module in Figure 4, functioning on the server, utilizes offloaded data from wearable sensors along with information from environmental sensors to perform more complex posture and event estimations with machine-/deep learnings. It also uses a scene graph to synchronize interactions considering users, meta-objects, and the environment, and conducts intelligence simulations to analyze individual characteristics to offer personal multisensory feedback. Finally, through network systems, the server communicates with the AR/VR device in real-time, to provide life-like interaction and life-like multisensory feedback with meta-objects on the post-metaverse.

The three distinct online and offline modules described in Figure 4 are utilized to generate meta-objects and provide adaptive multimodal feedback during user interactions with these objects. Users par-

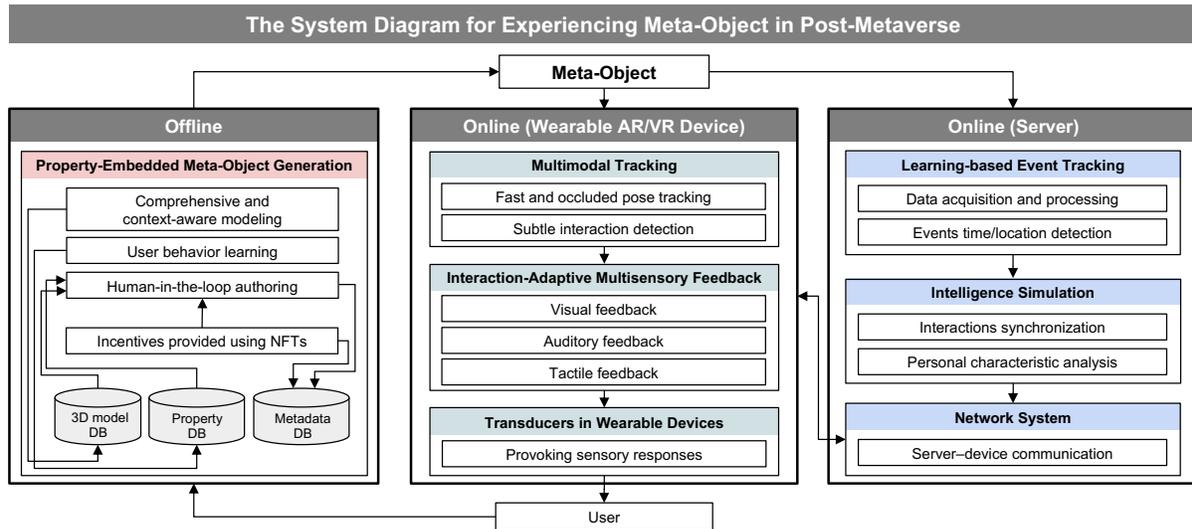

**FIGURE 4.** The system diagram for experiencing meta-object in post-metaverse.

ticipate in the offline meta-object generation module, through which the meta-objects are created. The information of the created meta-objects is then transmitted to the online (wearable AR/VR device) and online (server) modules, respectively. Subsequently, the online (wearable AR/VR device) module receives the results of the intelligence simulation from the online (server) through the network system. This module then synchronizes the properties of the meta-object, the individual characteristics of the user, and various interactions to generate customized multisensory feedback, which is delivered to the user through transducers. This process enables users to consistently produce meta-objects through voluntary participation and provides a lifelike experience in the post-metaverse, even with users who are physically distant, as if they are together in the real world. This capability opens new opportunities in education, industry, and culture by vividly recreating past experiences or enabling experiences that are otherwise risky or costly.

### Limitations and Future Works

While this research has introduced the key components of meta-objects, the next generation of virtual objects, and the technologies to implement them, several limitations remain. The first is the need for a level of experience synchronization that overcomes differences in individual device capability and networking conditions. Depending on the specifications of the AR/VR HMDs, wearable devices, and network conditions of the metaverse users, the experience level of the meta-

objects that can be represented in real-time will vary. In addition to these hardware disparities, complementary technologies are needed to provide the same level of meta-object experience while considering group dynamics among users.

The second limitation concerns the economic accessibility and technological advancement of AR/VR HMDs and wearable devices. As the field of metaverse grows, the push for more affordable spatial technologies without sacrificing quality becomes increasingly critical. The high cost of these devices currently restricts widespread adoption, limiting the potential user base and slowing the integration of metaverse into everyday activities. Lowering the financial barrier to entry while maintaining a high-quality immersive experience necessitates continuous innovations in both hardware manufacturing and software optimization. Moreover, the development of multisensory feedback devices that go beyond visual, auditory, and haptic sensations is needed. Including olfactory and gustatory feedback devices would further enrich the immersive experience, opening new avenues for realistic virtual interactions that engage all the senses. This broader sensory integration is needed not only for enhancing user experience but also for the utility of AR/VR applications in fields such as education, therapy, and cooking.

The final limitation lies in the inclusive design of user interfaces and user experiences (UI/UX) within the post-metaverse. The current interaction models predominantly cater to users without physical or sensory impairments. There is a need to develop technologies that accommodate users who might not be able to

experience the metaverse through traditional means, such as those with physical disabilities, sensory impairments, or other conditions that alter interaction capabilities. Ensuring that meta-objects and their corresponding interaction systems are accessible to all users, regardless of their physical abilities or sensory processing differences, is essential for truly immersive and inclusive metaverse environments. This includes developing adaptive feedback systems that can modify sensory outputs to match individual preferences.

## CONCLUSION

In this research, we have introduced the concept of meta-objects, the interactive and multisensory virtual object for post-metaverse that heralds a new paradigm for virtual interactions. There are three key components to experiencing meta-objects in the post-metaverse. First is a property-embedded meta-object generation, which encompass the physical and dynamic properties of objects. Second is interaction-adaptive multisensory feedback, which enables immersive interaction through gesture-adaptive sensory feedback. The last one is an intelligence simulation-based AR/VR platform, which allows personalized realistic experiences while supporting multi-user co-experience in real time. By focusing on these components, we aim to bridge the gap between the digital and physical realms, enabling users to engage with virtual objects in ways that closely mimic real-life interaction. This approach not only promises to enhance the immersive experience within ubiquitous virtual environments but also sets the stage for a myriad of applications in education, culture, industry, and beyond, making virtual experiences more tangible, meaningful, and accessible to users worldwide.

Looking ahead, integrating meta-objects into the post-metaverse could open a new paradigm for virtual interactions. As we venture further into the era of ubiquitous virtual reality, the principles and technologies developed through this research will serve as foundational elements in crafting the next generation of virtual experiences, paving the way for a more inclusive, immersive, and equitable digital future. Particularly by tokenizing meta-objects as NFTs and providing incentives, users in the post-metaverse can voluntarily engage in the production of meta-objects and partake in economic activities. This facilitates the creation of a metaverse that goes beyond simply experiencing content, paving the way for a world where people can live and conduct economic activities, integrated with reality. By transcending the boundaries of time and space to connect people and create new opportunities, it is anticipated that this can also contribute to addressing

various social issues arising from urban concentration.

## ACKNOWLEDGMENT

This work was supported by Institute of Information & communications Technology Planning & Evaluation (IITP) grant funded by the Korea government (MSIT) (No. RS-2024-00397663, Real-time XR Interface Technology Development for Environmental Adaptation) and under the metaverse support program to nurture the best talents (IITP-2024-RS-2022-00156435) grant funded by the Korea government (MSIT)

## REFERENCES

1. Y. Lee, S. Oh, C. Shin, and W. Woo, "Recent trends in ubiquitous virtual reality," in *2008 International Symposium on Ubiquitous Virtual Reality*. IEEE, 2008, pp. 33–36.
2. J.-e. Shin, J. Park, H. Kim, W. Woo, and B. Yoon, "Evaluating metaverse platforms: Status, direction, and challenges," *IEEE Consumer Electronics Magazine*, 2024.
3. Q. Tong, W. Wei, Y. Zhang, J. Xiao, and D. Wang, "Survey on hand-based haptic interaction for virtual reality," *IEEE Transactions on Haptics*, 2023.
4. J. Liu, F. Yu, and T. Funkhouser, "Interactive 3d modeling with a generative adversarial network," in *2017 International Conference on 3D Vision (3DV)*. IEEE, 2017, pp. 126–134.
5. B. Kerbl, G. Kopanas, T. Leimkühler, and G. Dretakis, "3d gaussian splatting for real-time radiance field rendering," *ACM Transactions on Graphics*, vol. 42, no. 4, pp. 1–14, 2023.
6. J. Park, H. Park, S.-E. Yoon, and W. Woo, "Physically-inspired deep light estimation from a homogeneous-material object for mixed reality lighting," *IEEE transactions on visualization and computer graphics*, vol. 26, no. 5, pp. 2002–2011, 2020.
7. J. Koo, S. Yoo, M. H. Nguyen, and M. Sung, "Salad: Part-level latent diffusion for 3d shape generation and manipulation," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 14 441–14 451.
8. L. Yang, K. Li, X. Zhan, F. Wu, A. Xu, L. Liu, and C. Lu, "Oakink: A large-scale knowledge repository for understanding hand-object interaction," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 20 953–20 962.
9. A. Henlein, A. Gopinath, N. Krishnaswamy, A. Mehler, and J. Pustejovsky, "Grounding human-object interaction to affordance behavior

- in multimodal datasets,” *Frontiers in artificial intelligence*, vol. 6, p. 1084740, 2023.
10. M. Melo, G. Gonçalves, P. Monteiro, H. Coelho, J. Vasconcelos-Raposo, and M. Bessa, “Do multisensory stimuli benefit the virtual reality experience? a systematic review,” *IEEE transactions on visualization and computer graphics*, vol. 28, no. 2, pp. 1428–1442, 2020.
  11. N. Cooper, F. Milella, C. Pinto, I. Cant, M. White, and G. Meyer, “The effects of substitute multisensory feedback on task performance and the sense of presence in a virtual reality environment,” *PloS one*, vol. 13, no. 2, p. e0191846, 2018.
  12. B. Williams, A. E. Garton, and C. J. Headleand, “Exploring visuo-haptic feedback congruency in virtual reality,” in *2020 International Conference on Cyberworlds (CW)*. IEEE, 2020, pp. 102–109.
  13. M. Marucci, G. Di Flumeri, G. Borghini, N. Sciaraffa, M. Scandola, E. F. Pavone, F. Babiloni, V. Betti, and P. Aricò, “The impact of multisensory integration and perceptual load in virtual reality settings on performance, workload and presence,” *Scientific Reports*, vol. 11, no. 1, p. 4831, 2021.
  14. J.-M. Jot, R. Audfray, M. Hertensteiner, and B. Schmidt, “Rendering spatial sound for interoperable experiences in the audio metaverse,” in *2021 Immersive and 3D Audio: from Architecture to Automotive (I3DA)*. IEEE, 2021, pp. 1–15.
  15. H. Deng, J. Li, Y. Gao, X. Liang, H. Wu, and A. Hao, “Phyvr: Physics-based multi-material and free-hand interaction in vr,” in *2023 IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*. IEEE, 2023, pp. 454–462.
  16. N. Hughes, Y. Chang, and L. Carlone, “Hydra: A real-time spatial perception system for 3d scene graph construction and optimization,” *arXiv preprint arXiv:2201.13360*, 2022.
  17. Q. Gu, A. Kuwajerwala, S. Morin, K. Jatavallabhula, B. Sen, A. Agarwal, C. Rivera, W. Paul, K. Ellis, R. Chellappa, C. Gan, C. de Melo, J. Tenenbaum, A. Torralba, F. Shkurti, and L. Paull, “Conceptgraphs: Open-vocabulary 3d scene graphs for perception and planning,” *arXiv*, 2023.
  18. C. Li, R. Zhang, J. Wong, C. Gokmen, S. Srivastava, R. Martín-Martín, C. Wang, G. Levine, W. Ai, B. Martínez *et al.*, “Behavior-1k: A human-centered, embodied ai benchmark with 1,000 everyday activities and realistic simulation,” *arXiv preprint arXiv:2403.09227*, 2024.
  19. C. Gan, J. Schwartz, S. Alter, M. Schrimpf, J. Traer, J. De Freitas, J. Kubilius, A. Bhandwaldar, N. Haber, M. Sano *et al.*, “Threedworld: A platform for interactive multi-modal physical simulation,” in *Annual Conference on Neural Information Processing Systems*, 2021.
  20. K. Kim, S. Oh, J. Han, and W. Woo, “u-contents: Describing contents in an emerging ubiquitous virtual reality,” *Proc. of IWUVR*, pp. 9–12, 2009.
  21. Y. Oh, S. Duval, S. Kim, H. Yoon, T. Ha, and W. Woo, “Foundation of a new digital ecosystem for u-content: Needs, definition, and design,” in *Virtual and Mixed Reality-Systems and Applications: International Conference, Virtual and Mixed Reality 2011, Held as Part of HCI International 2011, Orlando, FL, USA, July 9-14, 2011, Proceedings, Part II 4*. Springer, 2011, pp. 377–386.
  22. Y. Oh, T. Ha, C. Kang, and W. Woo, “Conceptualizing u-content ecosystem in ubiquitous vr environments,” in *2011 International Symposium on Ubiquitous Virtual Reality*. IEEE, 2011, pp. 13–16.
  23. X.-F. Han, H. Laga, and M. Bennamoun, “Image-based 3d object reconstruction: State-of-the-art and trends in the deep learning era,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 43, no. 5, p. 1578–1604, May 2021.
  24. K. Chen, D. Zhang, L. Yao, B. Guo, Z. Yu, and Y. Liu, “Deep learning for sensor-based human activity recognition: Overview, challenges, and opportunities,” *ACM Comput. Surv.*, vol. 54, no. 4, may 2021.
  25. J. Wald, N. Navab, and F. Tombari, “Learning 3d semantic scene graphs with instance embeddings,” *Int. J. Comput. Vision*, vol. 130, no. 3, p. 630–651, mar 2022.
  26. M. Nadini, L. Alessandretti, F. Di Giacinto, M. Martino, M. Luca, and A. Baronchelli, “Mapping the nft revolution: market trends, trade networks and visual features,” 06 2021.
  27. J. Lin, A. Zeng, H. Wang, L. Zhang, and Y. Li, “One-stage 3d whole-body mesh recovery with component aware transformer,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023, pp. 21 159–21 168.
  28. G. Guo and L. He, “Adaptive lighting modeling in 3d reconstruction with illumination properties recovery,” in *2023 9th International Conference on Virtual Reality (ICVR)*, 2023, pp. 321–328.
- Dooyoung Kim** is a senior contract researcher with the KI-ITC Augmented Reality Research Center (ARRC) at KAIST, Daejeon, Korea. His research interests include Ubiquitous Virtual Reality (UVR), Augmented Reality (AR), remote collaboration, spatial computing, mutual space, and VR locomotion. He received his doctoral degree in Graduate School of Culture Technology (GSCT) from KAIST, Korea, in 2024, and his B.S. degree in Mechanical Engineering from KAIST, Ko-

rea, in 2019. Contact him at [dooyoung.kim@kaist.ac.kr](mailto:dooyoung.kim@kaist.ac.kr).

**Taewook Ha** is a Ph.D. student in the Graduate School of Culture Technology (GSCT) at KAIST, Daejeon, Korea. His research interests include Ubiquitous Virtual Reality (UVR), Augmented Reality (AR), spatial understanding, and interaction systems. He received his M.S. degree in GSCT from KAIST, Korea, in 2023, and his B.S. degree in Electrical, Information and Physics Engineering from Tohoku University, Japan, in 2021. Contact him at [hatw95@kaist.ac.kr](mailto:hatw95@kaist.ac.kr)

**Jinseok Hong** is a Ph.D. student in the Graduate School of Metaverse (GSMV) at KAIST, Daejeon, Korea. His research interests include Ubiquitous Virtual Reality (UVR), Augmented Reality, Virtual Reality, and 3D Scene Synthesis. He received his M.S. degree in GSCT from KAIST, Korea, in 2023, and his B.A.S. degree in Art & Technology from Sogang University, Korea, in 2020. Contact him at [jindogliani@kaist.ac.kr](mailto:jindogliani@kaist.ac.kr).

**Seonji Kim** is a Ph.D. student in the Graduate School of Culture Technology (GSCT) at KAIST, Daejeon, Korea. Her research interests include Ubiquitous Virtual Reality (UVR), Augmented Reality, remote collaboration, and spatial computing. She received her M.S. degree in GSCT from KAIST, Korea, in 2023 and her B.S. degree in Computer Science and Engineering from Sungkyunkwan University, Korea, in 2021. Contact her at [seonji.kim@kaist.ac.kr](mailto:seonji.kim@kaist.ac.kr).

**Selin Choi** is a M.S. student in the Graduate School of Culture Technology (GSCT) at KAIST, Daejeon, Korea. Her research interests include Ubiquitous Virtual Reality (UVR), object interaction, and spatial computing. She received her B.S. degree in Software from Kwangwoon University, Korea, in 2023. Contact her at [selin.choi@kaist.ac.kr](mailto:selin.choi@kaist.ac.kr).

**Heejeong Ko** is a M.S. student in the Graduate School of Culture Technology (GSCT) at KAIST, Daejeon, Korea. Her research interests Ubiquitous Virtual Reality (UVR), Augmented Reality, Virtual Reality, and Spatial computing. She received her B.S. degree from the Global School of Media, Soongsil University, Korea, in 2023. Contact her at [hj.ko@kaist.ac.kr](mailto:hj.ko@kaist.ac.kr).

**Woontack Woo** is a professor at the Graduate School of Culture Technology (GSCT) and the Graduate School of Metaverse (GSMV) at KAIST, Daejeon, Korea. He is also the Director of the KI-ITC Augmented Reality Research Center (ARRC) at KAIST. In 2001, he coined the term 'Ubiquitous Virtual Reality (UVR)'

and started the UVR Lab at GIST, Gwangju, Korea. The main theme of his research is to realize augmented humans, augmented cities, and even augmented societies by implementing Ubiquitous VR in smart spaces. Contact him at [wwoo@kaist.ac.kr](mailto:wwoo@kaist.ac.kr).